

EMC TEST REPORT

For

Wuxi Force Technology Co., Ltd

Garage Door Opener

Test Model: FORCE-ULTIMATE

Additional model: Please refer to page 7

Prepared for : Wuxi Force Technology Co., Ltd
Address : No. 169 Chunjiang West Road, Xishan Industry Park, Wuxi, Jiangsu, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 601, Xingyuan Industrial Park, Gushu Community, Xixiang Street, Bao' an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 25, 2019
Number of tested samples : 1
Serial number : Prototype
Date of Test : March 25, 2019~April 30, 2019
Date of Report : April 30, 2019




EMC TEST REPORT**ETSI EN 301 489-1 V2.1.1 (2017-02)****ETSI EN 301 489-3 V2.1.1 (2017-03)**


Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services

Report Reference No. : LCS190322061AEA**Date Of Issue : April 30, 2019****Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.****Address..... : 101, 601, Xingyuan Industrial Park, Gushu Community, Xixiang Street, Bao' an District, Shenzhen, Guangdong, China****Testing Location/ Procedure..... : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐****Applicant's Name..... : Wuxi Force Technology Co., Ltd****Address..... : No. 169 Chunjiang West Road, Xishan Industry Park, Wuxi, Jiangsu, China****Test Specification****Standard..... : ETSI EN 301 489-1 V2.1.1 (2017-02)
ETSI EN 301 489-3 V2.1.1 (2017-03)****Test Report Form No. : LCSEMC-1.0****TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.****Master TRF..... : Dated 2017-06****Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Garage Door Opener**Trade Mark : ForceDoor****Test Model..... : FORCE-ULTIMATE****Ratings..... : For Transmitter: Input: DC 3V by battery
For Receive: Input: AC 110-240V****Result : Positive****Compiled by:**

Jayden Zhuo / Administrators

Supervised by:

Calvin Weng/ Technique principal

Approved by:

Gavin Liang/ Manager

EMC -- TEST REPORT**Test Report No. : LCS190322061AEA**April 30, 2019

Date of issue

Test Model..... : FORCE-ULTIMATE

EUT..... : Garage Door Opener

Applicant..... : Wuxi Force Technology Co., LtdAddress..... : No. 169 Chunjiang West Road, Xishan Industry Park, Wuxi,
Jiangsu, China

Telephone..... : +86 510 88798906

Fax..... : +86 510 88798906

Manufacturer..... : Wuxi Force Technology Co., LtdAddress..... : No. 169 Chunjiang West Road, Xishan Industry Park, Wuxi,
Jiangsu, China

Telephone..... : +86 510 88798906

Fax..... : +86 510 88798906

Factory..... : Wuxi Force Technology Co., LtdAddress..... : No. 169 Chunjiang West Road, Xishan Industry Park, Wuxi,
Jiangsu, China

Telephone..... : +86 510 88798906

Fax..... : +86 510 88798906

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	April 30, 2019	Initial Issue	Gavin Liang

TABLE OF CONTENTS

Test Report Description	Page
TABLE OF CONTENTS	5
1. GENERAL INFORMATION	7
1.1. Product Description for Equipment Under Test (EUT).....	7
1.2. Objective	7
1.3. Related Submittal(s)/Grant(s)	7
1.4. Test Methodology	8
1.5. Description of Test Facility	8
1.6. Support equipment List.....	8
1.7. External I/O.....	8
1.8. Measurement Uncertainty	8
1.9. Description Of Test Modes	8
2. SUMMARY OF TEST RESULTS	9
3. LINE CONDUCTED EMISSION	10
3.1. Conducted Emission Limit	10
3.2. Test Configuration.....	10
3.3. Test Data	10
4. RADIATED DISTURBANCE	20
4.1. Radiated Emission Limit.....	20
4.2. Test Configuration.....	20
4.3. Test Procedure.....	21
4.4. Test Data	23
5. HARMONIC CURRENT EMISSIONS	33
5.1. Test Configuration.....	33
5.2. Test Standard.....	33
5.3. Test Data	33
6. VOLTAGE FLUCTUATION AND FLICKER	34
6.1. Test Configuration.....	34
6.2. Test Standard.....	34
6.3. Test Data	34
7. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST	35
7.1. Performance criteria for Continuous phenomena applied to Transmitter (CT).....	35
7.2. Performance criteria for Transient phenomena applied to Transmitter (TT)	35
7.3. Performance criteria for Continuous phenomena applied to Receiver (CR).....	35
7.4. Performance criteria for Transient phenomena applied to Receiver (TR)	35
8. RF ELECTROMAGNETIC FIELD (80 MHZ-6000 MHZ)	36
8.1. Test Configuration.....	36
8.2. Test Standard.....	37
8.3. Severity Level	37
8.4. Test Procedure.....	37
8.5. Test Result.....	37
9. ELECTROSTATIC DISCHARGE	39
9.1. Test Configuration.....	39
9.2. Test Procedure.....	40
9.3. TEST DATA.....	40
10. ELECTRICAL FAST TRANSIENT IMMUNITY	51
10.1. Test Configuration.....	51
10.2. Test Standard.....	51
10.3. Test Procedure.....	52

10.4. Test Data	52
11. RF COMMON MODE	54
11.1. Test Configuration.....	54
11.2. Test Standard.....	54
11.3. Test Procedure.....	55
11.4. Test Data.....	55
12. SURGES, LINE TO LINE AND LINE TO GROUND	57
12.1. Test Configuration.....	57
12.2. Test Standard.....	57
12.3. Test Procedure.....	57
12.4. Test Data	58
13. VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST	59
13.1. Test Configuration.....	59
13.2. Test Standard.....	59
13.3. Test Procedure.....	59
13.4. Test Data	60
14. LIST OF MEASURING EQUIPMENT	61
15. TEST SETUP PHOTOGRAPHS	62

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT	: Garage Door Opener
Test Model.	: FORCE-ULTIMATE
Additional Model No.	: FORCE-ECO, FORCE-ARC, FORCE-MATIC, FORCE-PLUS FORCE-PLUS II, FORCE-ADVANCED, FORCE-OREO FORCE-UNO
Model Declaration	: The position and number of LED lights built in each model are different. Some of them have one lamp and one lamp. The circuit principle of the lamp is the same. Some models of the product are onboard, and some models are wired for PCB board. The product is only different in size and style. All types of power boards, control boards, antenna boards and other PCB boards are identical.
Power Supply	: For Transmitter: Input: DC 3V by battery For Receive: Input: AC 110-240V

Transmitter

Hardware Version	: FS-2189B-P1.0
Software Version	: FS-2189B-V1.0
Frequency Range	: 433.92MHz
Channel Number	: 1
Modulation Type	: OOK
Antenna Description	: PCB Antenna, 0dBi (Max.)

Receiver

Hardware Version	: FS-STC8-P1.0
Software Version	: EU-O-M-FS-OP.01
Frequency Range	: 433.92MHz
Channel Number	: 1
Modulation Type	: OOK
Receiver Category	: Category 2
Antenna Description	: Internal Antenna, 0dBi (Max.)

1.2. Objective

ETSI EN 301 489-1	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU
ETSI EN 301 489-3	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

The objective is to determine compliance with ETSI EN 301 489-1 V2.1.1 (2017-02) and ETSI EN 301 489-3 V2.1.1 (2017-03).

1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 301 489-1 V2.1.1 (2017-02) and ETSI EN 301 489-3 V2.1.1 (2017-03).

1.5. Description of Test Facility

FCC Registration Number is 254912.
 Industry Canada Registration Number is 9642A-1.
 EMSD Registration Number is ARCB0108.
 UL Registration Number is 100571-492.
 TUV SUD Registration Number is SCN1081.
 TUV RH Registration Number is UA 50296516-001.
 NVLAP Accreditation Code is 600167-0.
 FCC Designation Number is CN5024.
 CAB identifier: CN0071

1.6. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

1.7. External I/O

I/O Port Description	Quantity	Cable
--	--	--

1.8. Measurement Uncertainty

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	$\pm 2.42\text{dB}$	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	$\pm 3.54\text{dB}$	Polarize: V
	$\pm 4.1\text{dB}$	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	$\pm 2.08\text{dB}$	Polarize: H
	$\pm 2.56\text{dB}$	Polarize: V
Uncertainty for radio frequency	$\pm 3 \times 10^{-7}\text{MHz}$	
Uncertainty for conducted RF Power	$\pm 0.65\text{dB}$	
Uncertainty for temperature	$\pm 0.2^\circ\text{C}$	
Uncertainty for humidity	$\pm 1\%$	
Uncertainty for DC and low frequency voltages	$\pm 0.05\text{V}$	

1.9. Description Of Test Modes

There was 3 test Modes. TM1 to TM3 were shown below:

TM1: Operate in transmitting mode;
 TM2: Running motor mode
 TM3: Idle mode

***Note: All test modes were tested, but we only recorded the worst case in this report.

2. SUMMARY OF TEST RESULTS

Rule	Description of Test Items	Result
§7.1	Reference to clauses EN 301 489-1 §8.4 AC mains power input/output ports	Compliant
§7.1	Reference to clauses EN 301 489-1 §8.3 DC power input/output ports	N/A
§7.1	Reference to clauses EN 301 489-1 §8.2 Enclosure of ancillary equipment measured on a stand alone basis	Compliant
§7.1	Reference to clauses EN 301 489-1 §8.5 Harmonic current emissions (AC mains input port)	Compliant
§7.1	Reference to clauses EN 301 489-1 §8.6 Voltage fluctuations and flicker (AC mains input port)	Compliant
§7.1	Reference to clauses EN 301 489-1 §8.7 Telecommunication ports	N/A
§7.2	Reference to clauses EN 301 489-1 §9.3 Electrostatic discharge (EN 61000-4-2)	Compliant
§7.2	Reference to clauses EN 301 489-1 §9.2 Radio frequency electromagnetic field (80 MHz to 6 000 MHz)(EN 61000-4-3)	Compliant
§7.2	Reference to clauses EN 301 489-1 §9.4 Fast transients, common mode (EN 61000-4-4)	Compliant
§7.2	Reference to clauses EN 301 489-1 §9.8 Surges (EN 61000-4-5)	Compliant
§7.2	Reference to clauses EN 301 489-1 §9.5 Radio frequency, common mode (EN 61000-4-6)	Compliant
§7.2	Reference to clauses EN 301 489-1 §9.6 Transients and surges in the vehicular environment (ISO 7637-2)	N/A
§7.2	Reference to clauses EN 301 489-1 §9.7 Voltage dips and interruptions (EN 61000-4-11)	Compliant

Note: N/A means not applicable.

3. LINE CONDUCTED EMISSION

3.1. Conducted Emission Limit

ETSI EN 301 489-1 V2.1.1 (2017-02) Clause 8.4.3


Limits for Line Conducted Emission

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50~5.00	56.0	46.0
5.00~30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.2. Test Configuration

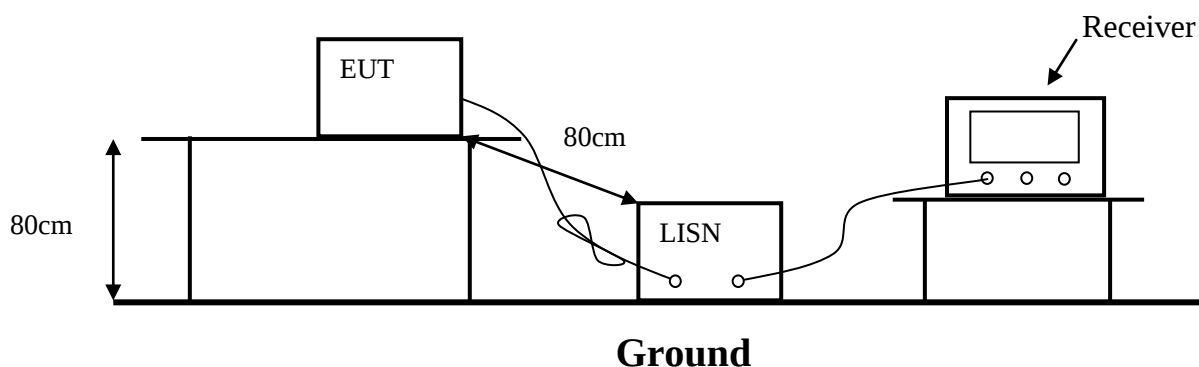

The setup of EUT is according with per ETSI EN 301 489-1 measurement procedure. The specification used was with the ETSI EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The EUT received DC 3V charging power from the Adapter which received power through a LISN supplying power of AC 230V/50Hz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz~1000MHz
(IF)RB	9kHz

All data was recorded in the Quasi-peak and average detection mode.

Marked on both the 6 highest Quasi-Peak & 6 highest Average emissions points of the EUT.


3.3. Test Data

PASS.

Please refer to the following page.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-ULTIMATE	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

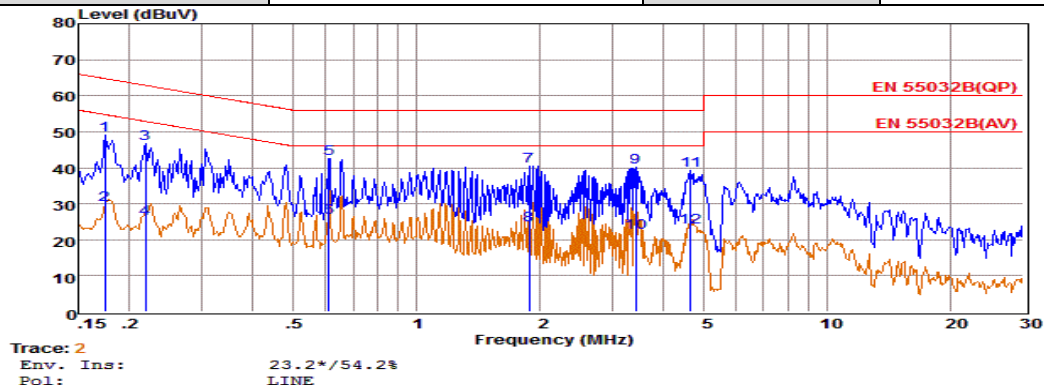

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	29.36	9.60	0.02	10.00	48.98	64.77	-15.79	QP
2	0.17	10.09	9.60	0.02	10.00	29.71	54.76	-25.05	Average
3	0.22	27.12	9.63	0.03	10.00	46.78	62.88	-16.10	QP
4	0.22	6.16	9.63	0.03	10.00	25.82	52.87	-27.05	Average
5	0.61	22.90	9.63	0.04	10.00	42.57	56.00	-13.43	QP
6	0.61	6.61	9.63	0.04	10.00	26.28	46.00	-19.72	Average
7	1.88	20.88	9.64	0.05	10.00	40.57	56.00	-15.43	QP
8	1.88	4.53	9.64	0.05	10.00	24.22	46.00	-21.78	Average
9	3.42	20.32	9.65	0.06	10.00	40.03	56.00	-15.97	QP
10	3.42	2.43	9.65	0.06	10.00	22.14	46.00	-23.86	Average
11	4.65	19.54	9.65	0.06	10.00	39.25	56.00	-16.75	QP
12	4.65	3.92	9.65	0.06	10.00	23.63	46.00	-22.37	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-ULTIMATE	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

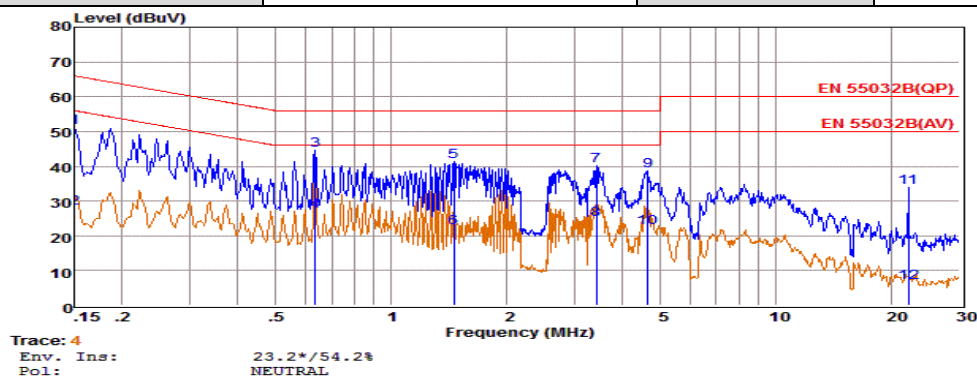


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	31.48	9.70	0.02	10.00	51.20	66.00	-14.80	QP
2	0.15	8.13	9.70	0.02	10.00	27.85	55.99	-28.14	Average
3	0.63	24.88	9.63	0.04	10.00	44.55	56.00	-11.45	QP
4	0.63	7.45	9.63	0.04	10.00	27.12	46.00	-18.88	Average
5	1.46	21.53	9.63	0.05	10.00	41.21	56.00	-14.79	QP
6	1.46	2.68	9.63	0.05	10.00	22.36	46.00	-23.64	Average
7	3.42	20.34	9.65	0.06	10.00	40.05	56.00	-15.95	QP
8	3.42	4.97	9.65	0.06	10.00	24.68	46.00	-21.32	Average
9	4.65	18.91	9.66	0.06	10.00	38.63	56.00	-17.37	QP
10	4.65	2.52	9.66	0.06	10.00	22.24	46.00	-23.76	Average
11	22.06	14.07	9.81	0.12	10.00	34.00	60.00	-26.00	QP
12	22.06	-13.47	9.81	0.12	10.00	6.46	50.00	-43.54	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-ECO	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

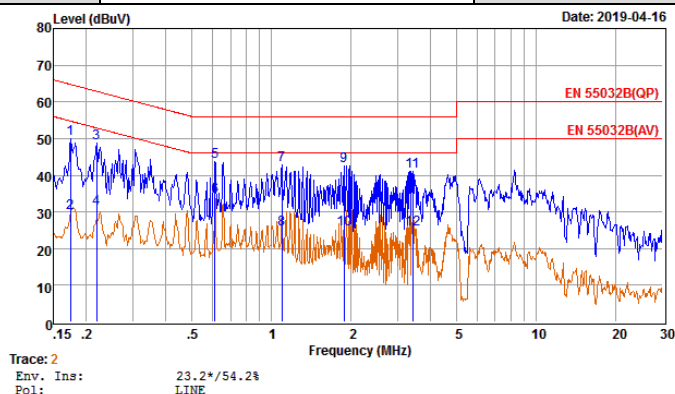

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	30.36	9.60	0.02	10.00	49.98	64.77	-14.79	QP
2	0.17	10.09	9.60	0.02	10.00	29.71	54.76	-25.05	Average
3	0.22	29.12	9.63	0.03	10.00	48.78	62.88	-14.10	QP
4	0.22	11.16	9.63	0.03	10.00	30.82	52.87	-22.05	Average
5	0.61	23.90	9.63	0.04	10.00	43.57	56.00	-12.43	QP
6	0.61	14.61	9.63	0.04	10.00	34.28	46.00	-11.72	Average
7	1.09	23.12	9.63	0.05	10.00	42.80	56.00	-13.20	QP
8	1.09	5.59	9.63	0.05	10.00	25.27	46.00	-20.73	Average
9	1.88	22.88	9.64	0.05	10.00	42.57	56.00	-13.43	QP
10	1.88	5.53	9.64	0.05	10.00	25.22	46.00	-20.78	Average
11	3.42	21.32	9.65	0.06	10.00	41.03	56.00	-14.97	QP
12	3.42	5.43	9.65	0.06	10.00	25.14	46.00	-20.86	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-ECO	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

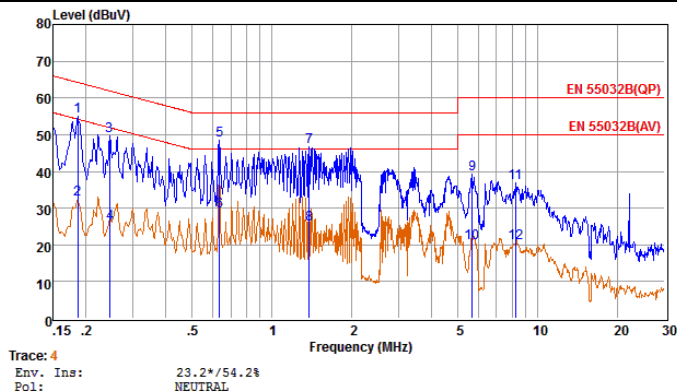


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.19	35.33	9.62	0.02	10.00	54.97	64.20	-9.23	QP
2	0.19	12.78	9.62	0.02	10.00	32.42	54.19	-21.77	Average
3	0.25	30.18	9.60	0.03	10.00	49.81	61.91	-12.10	QP
4	0.25	6.38	9.60	0.03	10.00	26.01	51.90	-25.89	Average
5	0.63	28.88	9.63	0.04	10.00	48.55	56.00	-7.45	QP
6	0.63	9.45	9.63	0.04	10.00	29.12	46.00	-16.88	Average
7	1.38	27.16	9.63	0.05	10.00	46.84	56.00	-9.16	QP
8	1.38	5.86	9.63	0.05	10.00	25.54	46.00	-20.46	Average
9	5.68	19.58	9.67	0.06	10.00	39.31	60.00	-20.69	QP
10	5.68	0.87	9.67	0.06	10.00	20.60	50.00	-29.40	Average
11	8.24	17.15	9.70	0.07	10.00	36.92	60.00	-23.08	QP
12	8.24	0.73	9.70	0.07	10.00	20.50	50.00	-29.50	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-ARC	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

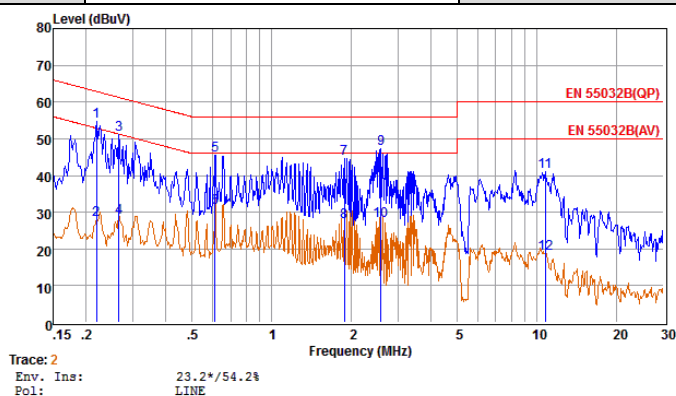

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.22	35.12	9.63	0.03	10.00	54.78	62.88	-8.10	QP
2	0.22	8.16	9.63	0.03	10.00	27.82	52.87	-25.05	Average
3	0.27	31.46	9.63	0.03	10.00	51.12	61.25	-10.13	QP
4	0.27	8.75	9.63	0.03	10.00	28.41	51.24	-22.83	Average
5	0.61	25.90	9.63	0.04	10.00	45.57	56.00	-10.43	QP
6	0.61	11.61	9.63	0.04	10.00	31.28	46.00	-14.72	Average
7	1.88	24.88	9.64	0.05	10.00	44.57	56.00	-11.43	QP
8	1.88	7.53	9.64	0.05	10.00	27.22	46.00	-18.78	Average
9	2.58	27.47	9.64	0.05	10.00	47.16	56.00	-8.84	QP
10	2.58	7.93	9.64	0.05	10.00	27.62	46.00	-18.38	Average
11	10.73	21.28	9.69	0.08	10.00	41.05	60.00	-18.95	QP
12	10.73	-0.93	9.69	0.08	10.00	18.84	50.00	-31.16	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-ARC	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

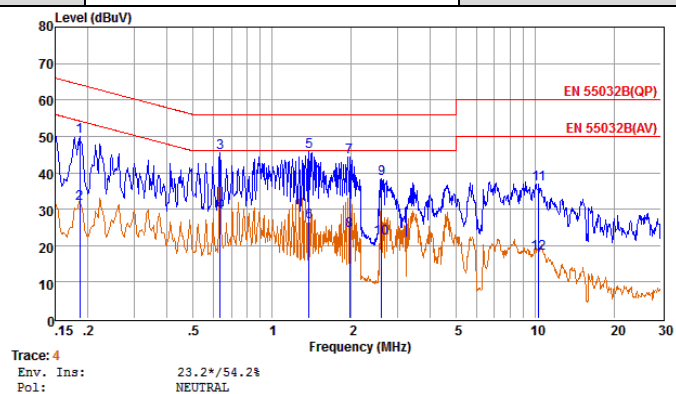


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.19	30.33	9.62	0.02	10.00	49.97	64.20	-14.23	QP
2	0.19	11.78	9.62	0.02	10.00	31.42	54.19	-22.77	Average
3	0.63	25.88	9.63	0.04	10.00	45.55	56.00	-10.45	QP
4	0.63	9.45	9.63	0.04	10.00	29.12	46.00	-16.88	Average
5	1.38	26.16	9.63	0.05	10.00	45.84	56.00	-10.16	QP
6	1.38	6.86	9.63	0.05	10.00	26.54	46.00	-19.46	Average
7	1.97	24.71	9.63	0.05	10.00	44.39	56.00	-11.61	QP
8	1.97	4.43	9.63	0.05	10.00	24.11	46.00	-21.89	Average
9	2.61	18.53	9.64	0.05	10.00	38.22	56.00	-17.78	QP
10	2.61	2.31	9.64	0.05	10.00	22.00	46.00	-24.00	Average
11	10.29	17.12	9.72	0.08	10.00	36.92	60.00	-23.08	QP
12	10.29	-2.06	9.72	0.08	10.00	17.74	50.00	-32.26	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-MATIC	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

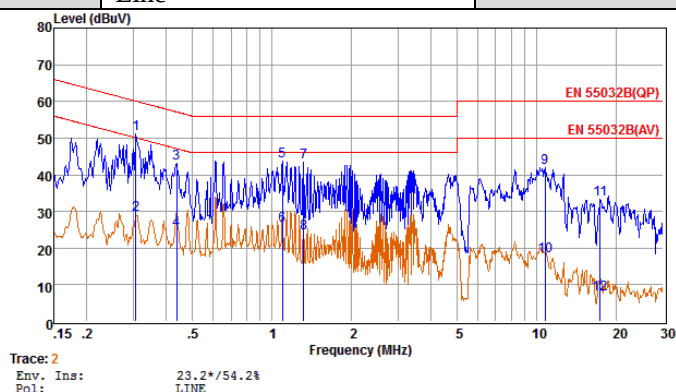

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.31	31.46	9.63	0.03	10.00	51.12	60.06	-8.94	QP
2	0.31	9.47	9.63	0.03	10.00	29.13	50.06	-20.93	Average
3	0.44	23.35	9.62	0.04	10.00	43.01	57.11	-14.10	QP
4	0.44	5.29	9.62	0.04	10.00	24.95	47.11	-22.16	Average
5	1.09	24.12	9.63	0.05	10.00	43.80	56.00	-12.20	QP
6	1.09	6.59	9.63	0.05	10.00	26.27	46.00	-19.73	Average
7	1.32	23.61	9.63	0.05	10.00	43.29	56.00	-12.71	QP
8	1.32	4.49	9.63	0.05	10.00	24.17	46.00	-21.83	Average
9	10.73	22.28	9.69	0.08	10.00	42.05	60.00	-17.95	QP
10	10.73	-1.93	9.69	0.08	10.00	17.84	50.00	-32.16	Average
11	17.38	13.52	9.73	0.11	10.00	33.36	60.00	-26.64	QP
12	17.38	-12.49	9.73	0.11	10.00	7.35	50.00	-42.65	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-MATIC	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

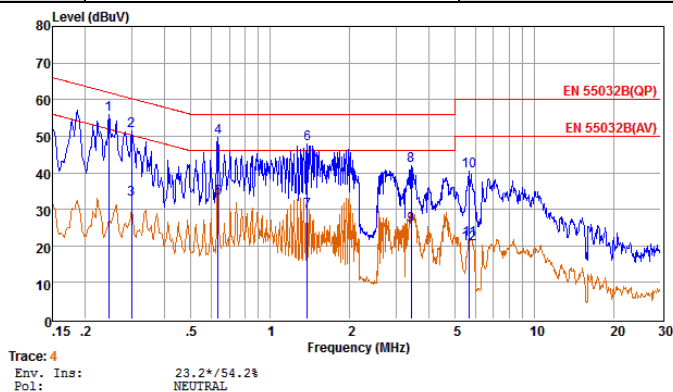


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.25	36.18	9.60	0.03	10.00	55.81	61.91	-6.10	QP
2	0.30	31.94	9.60	0.03	10.00	51.57	60.28	-8.71	QP
3	0.30	12.98	9.60	0.03	10.00	32.61	50.28	-17.67	Average
4	0.63	29.88	9.63	0.04	10.00	49.55	56.00	-6.45	QP
5	0.63	13.45	9.63	0.04	10.00	33.12	46.00	-12.88	Average
6	1.38	28.16	9.63	0.05	10.00	47.84	56.00	-8.16	QP
7	1.38	9.86	9.63	0.05	10.00	29.54	46.00	-16.46	Average
8	3.42	22.34	9.65	0.06	10.00	42.05	56.00	-13.95	QP
9	3.42	5.97	9.65	0.06	10.00	25.68	46.00	-20.32	Average
10	5.68	20.58	9.67	0.06	10.00	40.31	60.00	-19.69	QP
11	5.68	1.87	9.67	0.06	10.00	21.60	50.00	-28.40	Average
12	5.68	0.87	9.67	0.06	10.00	20.60	50.00	-29.40	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-PLUS	Test Mode	TM1
Environmental Conditions	23.2℃, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

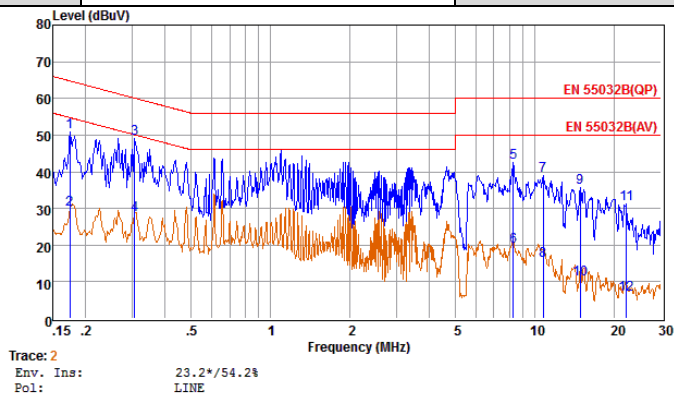

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	31.36	9.60	0.02	10.00	50.98	64.77	-13.79	QP
2	0.17	10.09	9.60	0.02	10.00	29.71	54.76	-25.05	Average
3	0.31	29.46	9.63	0.03	10.00	49.12	60.06	-10.94	QP
4	0.31	8.47	9.63	0.03	10.00	28.13	50.06	-21.93	Average
5	8.28	22.71	9.68	0.07	10.00	42.46	60.00	-17.54	QP
6	8.28	-0.16	9.68	0.07	10.00	19.59	50.00	-30.41	Average
7	10.73	19.28	9.69	0.08	10.00	39.05	60.00	-20.95	QP
8	10.73	-3.93	9.69	0.08	10.00	15.84	50.00	-34.16	Average
9	14.83	15.90	9.71	0.10	10.00	35.71	60.00	-24.29	QP
10	14.83	-9.15	9.71	0.10	10.00	10.66	50.00	-39.34	Average
11	22.18	11.31	9.71	0.12	10.00	31.14	60.00	-28.86	QP
12	22.18	-13.26	9.71	0.12	10.00	6.57	50.00	-43.43	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-PLUS	Test Mode	TM1
Environmental Conditions	23.2℃, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

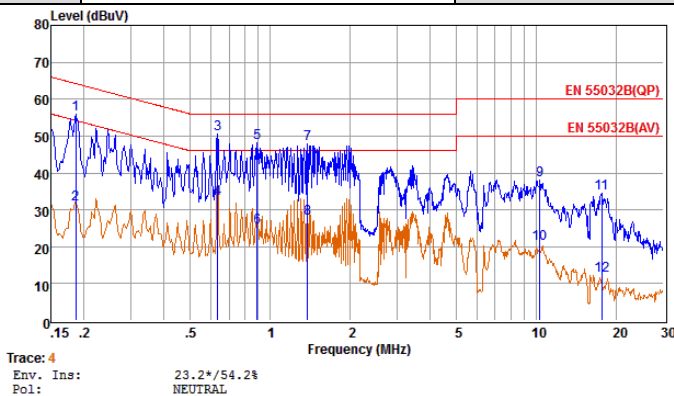


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.19	36.33	9.62	0.02	10.00	55.97	64.20	-8.23	QP
2	0.19	11.78	9.62	0.02	10.00	31.42	54.19	-22.77	Average
3	0.63	30.88	9.63	0.04	10.00	50.55	56.00	-5.45	QP
4	0.63	13.45	9.63	0.04	10.00	33.12	46.00	-12.88	Average
5	0.89	28.64	9.63	0.05	10.00	48.32	56.00	-7.68	QP
6	0.89	5.60	9.63	0.05	10.00	25.28	46.00	-20.72	Average
7	1.38	28.16	9.63	0.05	10.00	47.84	56.00	-8.16	QP
8	1.38	7.86	9.63	0.05	10.00	27.54	46.00	-18.46	Average
9	10.29	18.12	9.72	0.08	10.00	37.92	60.00	-22.08	QP
10	10.29	0.94	9.72	0.08	10.00	20.74	50.00	-29.26	Average
11	17.57	14.56	9.79	0.11	10.00	34.46	60.00	-25.54	QP
12	17.57	-7.82	9.79	0.11	10.00	12.08	50.00	-37.92	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-PLUS II	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

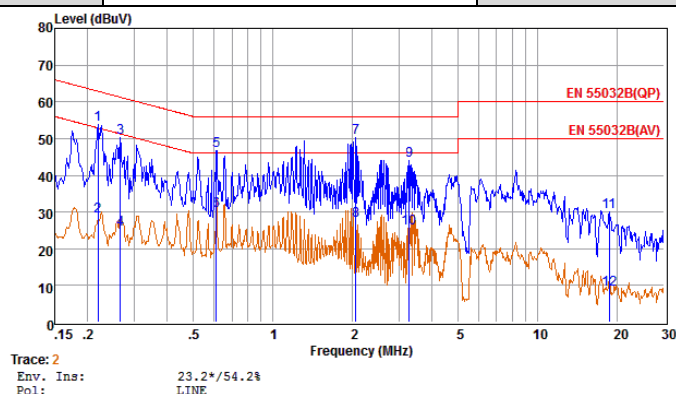

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.22	34.12	9.63	0.03	10.00	53.78	62.88	-9.10	QP
2	0.22	9.16	9.63	0.03	10.00	28.82	52.87	-24.05	Average
3	0.27	30.46	9.63	0.03	10.00	50.12	61.25	-11.13	QP
4	0.27	5.73	9.63	0.03	10.00	25.39	51.24	-25.85	Average
5	0.61	26.90	9.63	0.04	10.00	46.57	56.00	-9.43	QP
6	0.61	10.61	9.63	0.04	10.00	30.28	46.00	-15.72	Average
7	2.05	30.46	9.64	0.05	10.00	50.15	56.00	-5.85	QP
8	2.06	7.95	9.64	0.05	10.00	27.64	46.00	-18.36	Average
9	3.28	24.19	9.65	0.06	10.00	43.90	56.00	-12.10	QP
10	3.28	5.82	9.65	0.06	10.00	25.53	46.00	-20.47	Average
11	18.62	10.20	9.75	0.11	10.00	30.06	60.00	-29.94	QP
12	18.62	-11.00	9.75	0.11	10.00	8.86	50.00	-41.14	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-PLUS II	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

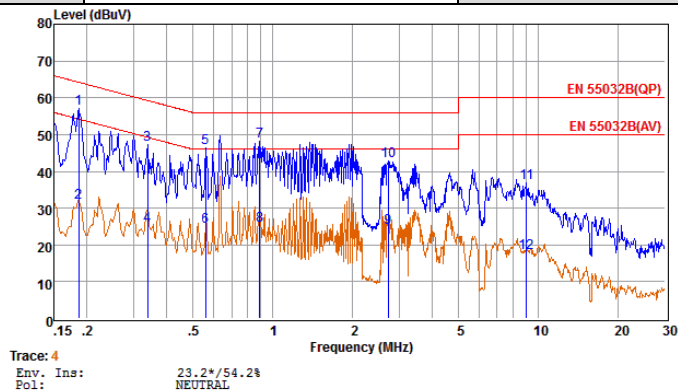


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.19	37.33	9.62	0.02	10.00	56.97	64.20	-7.23	QP
2	0.19	11.78	9.62	0.02	10.00	31.42	54.19	-22.77	Average
3	0.34	27.69	9.61	0.03	10.00	47.33	59.27	-11.94	QP
4	0.34	5.68	9.61	0.03	10.00	25.32	49.26	-23.94	Average
5	0.56	26.77	9.62	0.04	10.00	46.43	56.00	-9.57	QP
6	0.56	5.18	9.62	0.04	10.00	24.84	46.00	-21.16	Average
7	0.89	28.64	9.63	0.05	10.00	48.32	56.00	-7.68	QP
8	0.89	5.60	9.63	0.05	10.00	25.28	46.00	-20.72	Average
9	2.72	4.85	9.64	0.05	10.00	24.54	46.00	-21.46	Average
10	2.72	23.12	9.64	0.05	10.00	42.81	56.00	-13.19	QP
11	9.01	17.09	9.71	0.08	10.00	36.88	60.00	-23.12	QP
12	9.01	-1.95	9.71	0.08	10.00	17.84	50.00	-32.16	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-ADVANCED	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

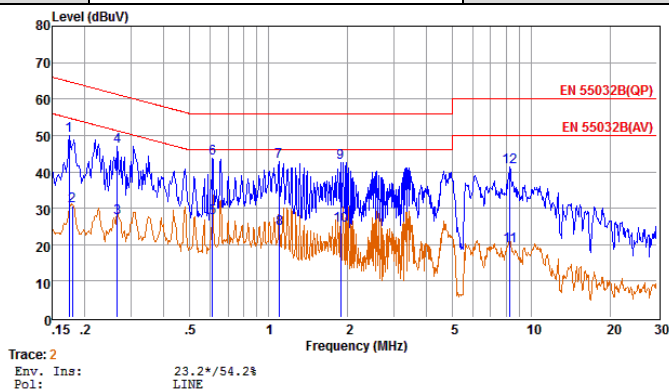

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	30.36	9.60	0.02	10.00	49.98	64.77	-14.79	QP
2	0.18	11.08	9.61	0.02	10.00	30.71	54.54	-23.83	Average
3	0.27	7.75	9.63	0.03	10.00	27.41	51.26	-23.85	Average
4	0.27	27.46	9.63	0.03	10.00	47.12	61.25	-14.13	QP
5	0.61	7.61	9.63	0.04	10.00	27.28	46.00	-18.72	Average
6	0.61	23.90	9.63	0.04	10.00	43.57	56.00	-12.43	QP
7	1.09	23.12	9.63	0.05	10.00	42.80	56.00	-13.20	QP
8	1.10	4.59	9.63	0.05	10.00	24.27	46.00	-21.73	Average
9	1.88	22.88	9.64	0.05	10.00	42.57	56.00	-13.43	QP
10	1.88	5.53	9.64	0.05	10.00	25.22	46.00	-20.78	Average
11	8.28	-0.16	9.68	0.07	10.00	19.59	50.00	-30.41	Average
12	8.28	21.71	9.68	0.07	10.00	41.46	60.00	-18.54	QP

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-ADVANCED	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

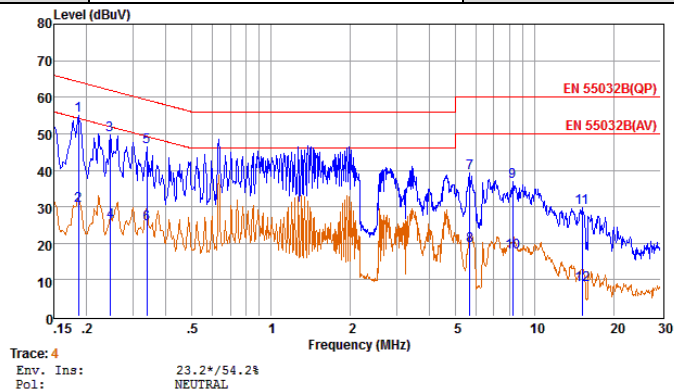


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.19	35.33	9.62	0.02	10.00	54.97	64.20	-9.23	QP
2	0.19	10.78	9.62	0.02	10.00	30.42	54.19	-23.77	Average
3	0.25	30.18	9.60	0.03	10.00	49.81	61.91	-12.10	QP
4	0.25	6.38	9.60	0.03	10.00	26.01	51.90	-25.89	Average
5	0.34	26.69	9.61	0.03	10.00	46.33	59.27	-12.94	QP
6	0.34	5.68	9.61	0.03	10.00	25.32	49.26	-23.94	Average
7	5.68	19.58	9.67	0.06	10.00	39.31	60.00	-20.69	QP
8	5.68	-0.35	9.67	0.06	10.00	19.38	50.00	-30.62	Average
9	8.24	17.15	9.70	0.07	10.00	36.92	60.00	-23.08	QP
10	8.24	-2.27	9.70	0.07	10.00	17.50	50.00	-32.50	Average
11	15.15	9.76	9.74	0.10	10.00	29.60	60.00	-30.40	QP
12	15.15	-11.08	9.74	0.10	10.00	8.76	50.00	-41.24	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-OREO	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

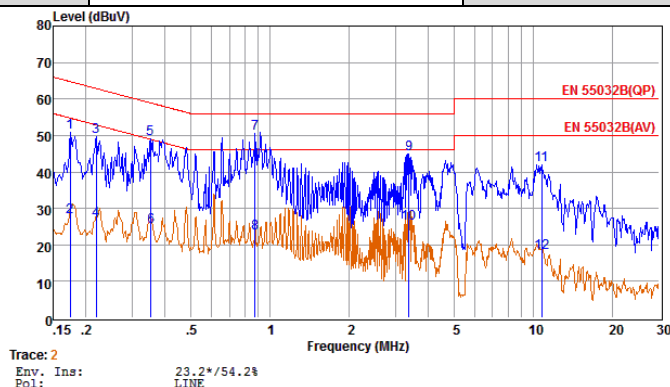

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	31.36	9.60	0.02	10.00	50.98	64.77	-13.79	QP
2	0.17	8.09	9.60	0.02	10.00	27.71	54.76	-27.05	Average
3	0.22	30.12	9.63	0.03	10.00	49.78	62.88	-13.10	QP
4	0.22	7.16	9.63	0.03	10.00	26.82	52.87	-26.05	Average
5	0.35	29.46	9.62	0.03	10.00	49.11	58.91	-9.80	QP
6	0.35	5.27	9.62	0.03	10.00	24.92	48.91	-23.99	Average
7	0.88	30.78	9.63	0.04	10.00	50.45	56.00	-5.55	QP
8	0.88	3.57	9.63	0.04	10.00	23.24	46.00	-22.76	Average
9	3.36	25.28	9.65	0.06	10.00	44.99	56.00	-11.01	QP
10	3.36	6.03	9.65	0.06	10.00	25.74	46.00	-20.26	Average
11	10.73	22.28	9.69	0.08	10.00	42.05	60.00	-17.95	QP
12	10.73	-1.93	9.69	0.08	10.00	17.84	50.00	-32.16	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-OREO	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

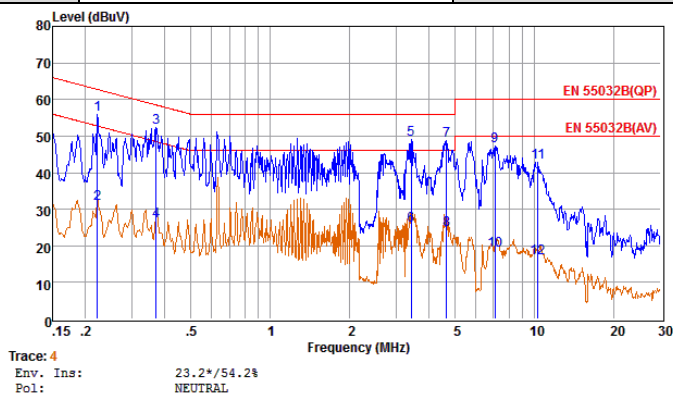


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.22	36.38	9.59	0.03	10.00	56.00	62.74	-6.74	QP
2	0.22	11.79	9.59	0.03	10.00	31.41	52.74	-21.33	Average
3	0.37	32.57	9.61	0.03	10.00	52.21	58.52	-6.31	QP
4	0.37	7.10	9.61	0.03	10.00	26.74	48.52	-21.78	Average
5	3.42	29.34	9.65	0.06	10.00	49.05	56.00	-6.95	QP
6	3.42	5.97	9.65	0.06	10.00	25.68	46.00	-20.32	Average
7	4.65	28.91	9.66	0.06	10.00	48.63	56.00	-7.37	QP
8	4.65	4.52	9.66	0.06	10.00	24.24	46.00	-21.76	Average
9	7.10	27.39	9.69	0.07	10.00	47.15	60.00	-12.85	QP
10	7.10	-1.11	9.69	0.07	10.00	18.65	50.00	-31.35	Average
11	10.29	23.12	9.72	0.08	10.00	42.92	60.00	-17.08	QP
12	10.29	-3.06	9.72	0.08	10.00	16.74	50.00	-33.26	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

For pre-scan, the worst test case is TM1, and the test data was show as follow:


Model No.	FORCE-UNO	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Line		

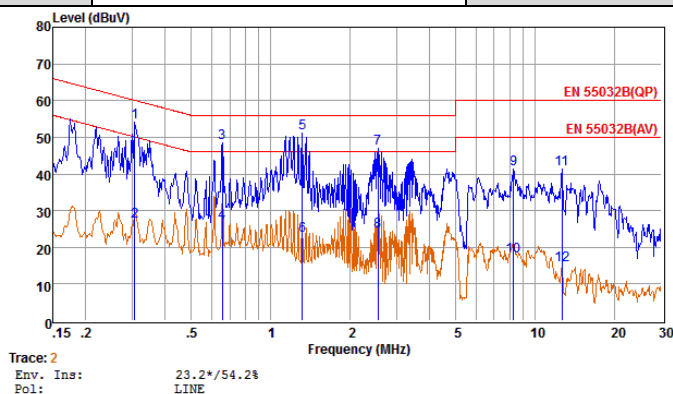

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.31	34.46	9.63	0.03	10.00	54.12	60.06	-5.94	QP
2	0.31	7.47	9.63	0.03	10.00	27.13	50.06	-22.93	Average
3	0.66	28.67	9.64	0.04	10.00	48.35	56.00	-7.65	QP
4	0.66	7.01	9.64	0.04	10.00	26.69	46.00	-19.31	Average
5	1.32	31.61	9.63	0.05	10.00	51.29	56.00	-4.71	QP
6	1.32	3.49	9.63	0.05	10.00	23.17	46.00	-22.83	Average
7	2.54	27.18	9.64	0.05	10.00	46.87	56.00	-9.13	QP
8	2.54	4.81	9.64	0.05	10.00	24.50	46.00	-21.50	Average
9	8.28	21.71	9.68	0.07	10.00	41.46	60.00	-18.54	QP
10	8.28	-2.16	9.68	0.07	10.00	17.59	50.00	-32.41	Average
11	12.65	21.42	9.70	0.09	10.00	41.21	60.00	-18.79	QP
12	12.65	-4.71	9.70	0.09	10.00	15.08	50.00	-34.92	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Model No.	FORCE-UNO	Test Mode	TM1
Environmental Conditions	23.2°C, 54.2% RH	Test Engineer	Diamond Lu
Pol	Neutral		

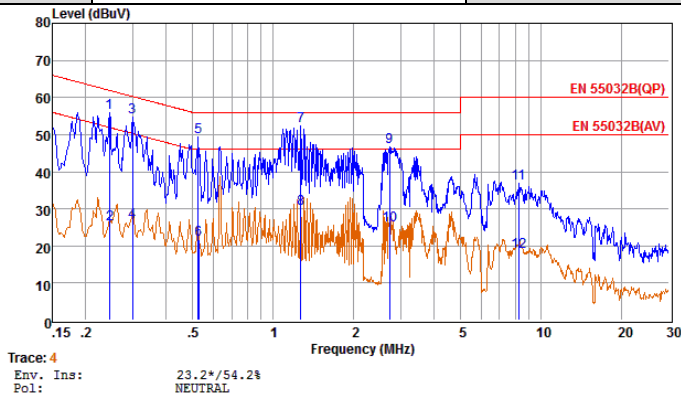

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.25	36.18	9.60	0.03	10.00	55.81	61.91	-6.10	QP
2	0.25	6.38	9.60	0.03	10.00	26.01	51.90	-25.89	Average
3	0.30	34.94	9.60	0.03	10.00	54.57	60.28	-5.71	QP
4	0.30	6.98	9.60	0.03	10.00	26.61	50.28	-23.67	Average
5	0.53	29.84	9.62	0.04	10.00	49.50	56.00	-6.50	QP
6	0.53	2.04	9.62	0.04	10.00	21.70	46.00	-24.30	Average
7	1.27	32.72	9.63	0.05	10.00	52.40	56.00	-3.60	QP
8	1.27	10.24	9.63	0.05	10.00	29.92	46.00	-16.08	Average
9	2.72	27.12	9.64	0.05	10.00	46.81	56.00	-9.19	QP
10	2.72	5.85	9.64	0.05	10.00	25.54	46.00	-20.46	Average
11	8.24	17.15	9.70	0.07	10.00	36.92	60.00	-23.08	QP
12	8.24	-1.27	9.70	0.07	10.00	18.50	50.00	-31.50	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

4. RADIATED DISTURBANCE

4.1. Radiated Emission Limit

ETSI EN 301 489-1 V2.1.1 (2017-02)

Limits for radiated disturbance Below 1GHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limit (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47


Note: (1) The smaller limit shall apply at the combination point between two frequency bands. (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.


Limits for radiated disturbance Above 1GHz

Frequency (MHz)	Distance (Meters)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)
1000-3000	3	50	70
3000-6000	3	54	74

Note: The lower limit applies at the transition frequency.

4.2. Test Configuration

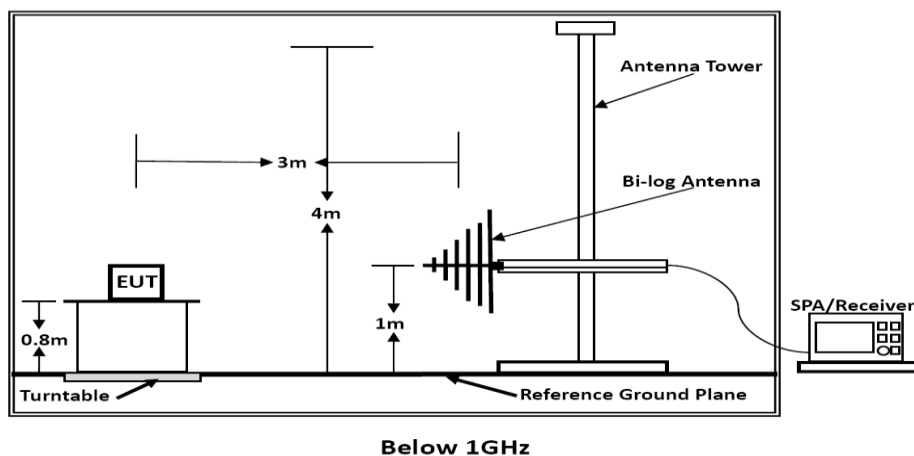

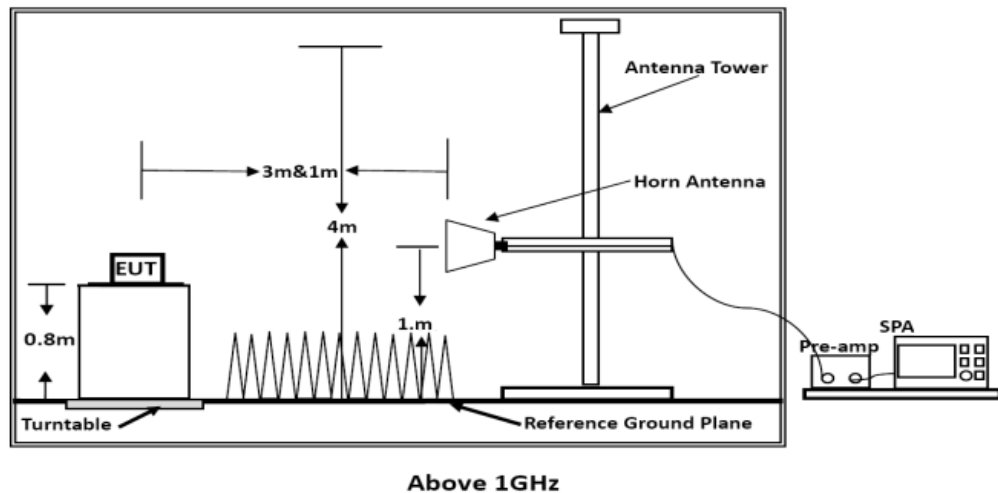

4.3. Test Procedure

1) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 °to 315 °using 45 °steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 4 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

2) Sequence of testing 1 GHz to 6 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 °to 315 °using 45 °steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	6000 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

4.4. Test Data

The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	FORCE-ULTIMATE	Test Mode	TM1
Environmental Conditions	24.4°C, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

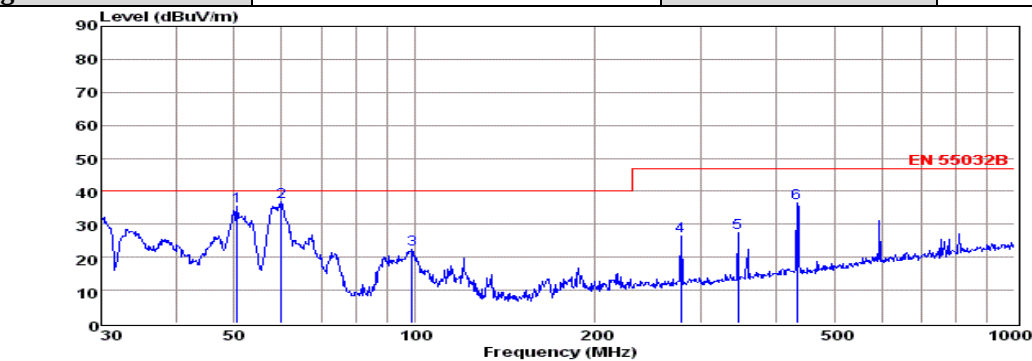


Env./Ins: 24.4°C/53.4%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	50.59	21.68	0.54	13.22	35.44	40.00	-4.56	QP
2	59.86	23.64	0.49	12.70	36.83	40.00	-3.17	QP
3	98.83	8.58	0.61	13.09	22.28	40.00	-17.72	QP
4	278.07	12.91	1.01	12.61	26.53	47.00	-20.47	QP
5	345.60	12.20	1.13	14.21	27.54	47.00	-19.46	QP
6	434.07	19.83	1.18	15.53	36.54	47.00	-10.46	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Model No.	FORCE-ULTIMATE	Test Mode	TM1
Environmental Conditions	24.4°C, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

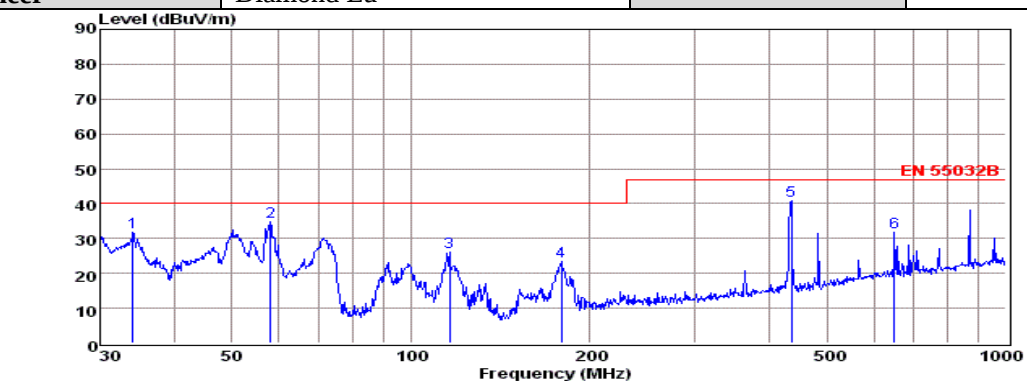


Env./Ins: 24.4°C/53.4%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.04	19.25	0.37	12.31	31.93	40.00	-8.07	QP
2	58.00	21.46	0.47	12.82	34.75	40.00	-5.25	QP
3	116.13	14.37	0.68	11.16	26.21	40.00	-13.79	QP
4	178.76	13.00	0.89	9.59	23.48	40.00	-16.52	QP
5	435.59	23.81	1.41	15.54	40.76	47.00	-6.24	QP
6	649.66	11.62	1.58	18.63	31.83	47.00	-15.17	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	FORCE-ECO	Test Mode	TM1
Environmental Conditions	24.4°C, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

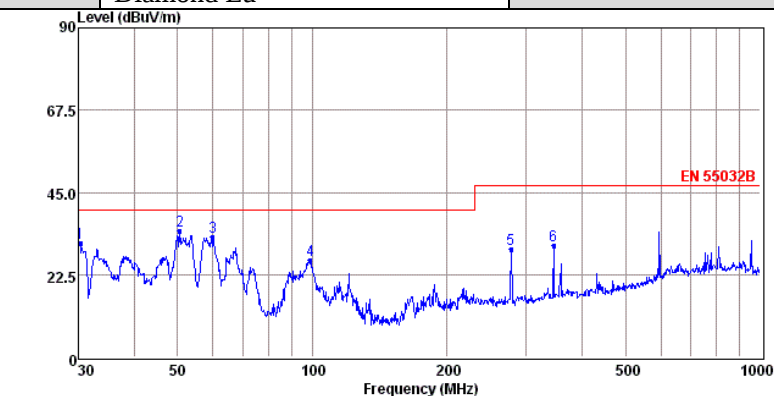


Env./Ins: 24.4°C/53.4%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.32	18.34	0.39	12.33	31.06	40.00	-8.94	QP
2	50.59	20.68	0.54	13.22	34.44	40.00	-5.56	QP
3	59.86	19.64	0.49	12.70	32.83	40.00	-7.17	QP
4	98.83	12.58	0.61	13.09	26.28	40.00	-13.72	QP
5	278.07	15.91	1.01	12.61	29.53	47.00	-17.47	QP
6	345.60	15.20	1.13	14.21	30.54	47.00	-16.46	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Model No.	FORCE-ECO	Test Mode	TM1
Environmental Conditions	24.4°C, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

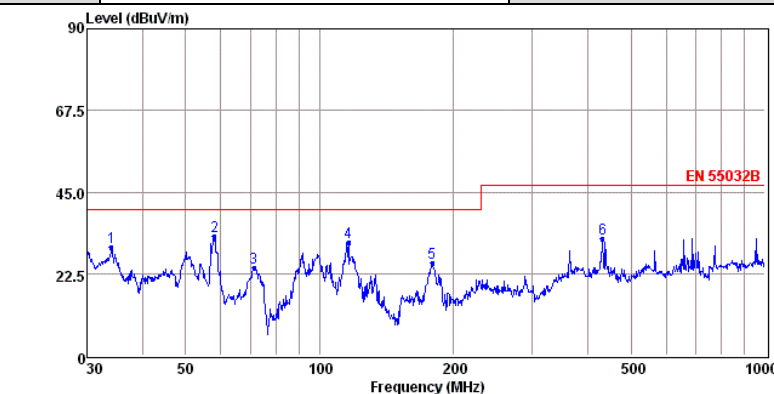


Env./Ins: 24.4°C/53.4%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.04	17.25	0.37	12.31	29.93	40.00	-10.07	QP
2	58.00	19.46	0.47	12.82	32.75	40.00	-7.25	QP
3	71.08	15.20	0.55	8.47	24.22	40.00	-15.78	QP
4	116.13	19.37	0.68	11.16	31.21	40.00	-8.79	QP
5	178.76	15.00	0.89	9.59	25.48	40.00	-14.52	QP
6	432.55	15.30	1.18	15.53	32.01	47.00	-14.99	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	FORCE-ARC	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

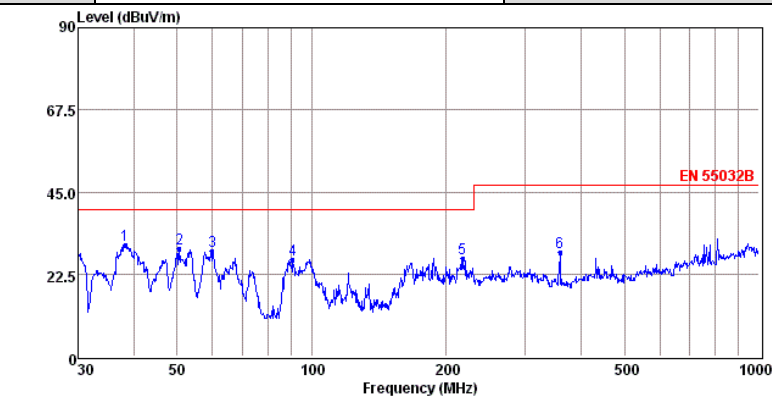


Env./Ins: 24.4℃/53.4%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	38.21	17.05	0.38	13.12	30.55	40.00	-9.45	QP
2	50.59	15.68	0.54	13.22	29.44	40.00	-10.56	QP
3	59.86	15.64	0.49	12.70	28.83	40.00	-11.17	QP
4	90.54	13.85	0.68	12.00	26.53	40.00	-13.47	QP
5	217.54	14.90	0.88	11.12	26.90	40.00	-13.10	QP
6	359.19	12.73	1.18	14.42	28.33	47.00	-18.67	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Model No.	FORCE-ARC	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

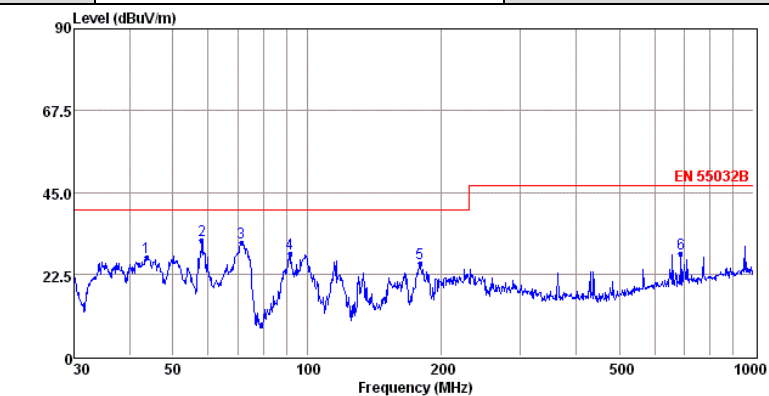


Env./Ins: 24.4℃/53.4%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	43.66	13.28	0.41	13.56	27.25	40.00	-12.75	QP
2	58.00	18.46	0.47	12.82	31.75	40.00	-8.25	QP
3	71.08	22.20	0.55	8.47	31.22	40.00	-8.78	QP
4	91.49	15.47	0.56	12.18	28.21	40.00	-11.79	QP
5	178.76	15.00	0.89	9.59	25.48	40.00	-14.52	QP
6	687.15	7.67	1.73	18.76	28.16	47.00	-18.84	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

The worst test mode of the EUT was TM1, and its test data was showed as the follow:


Model No.	FORCE-MATIC	Test Mode	TM1
Environmental Conditions	24.4°C, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

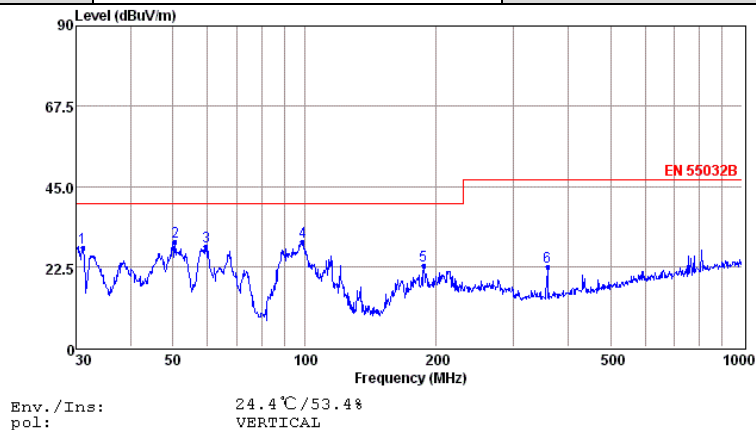

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	31.07	15.04	0.39	12.32	27.75	40.00	-12.25	QP
2	50.59	15.68	0.54	13.22	29.44	40.00	-10.56	QP
3	59.44	14.77	0.49	12.73	27.99	40.00	-12.01	QP
4	98.83	15.58	0.61	13.09	29.28	40.00	-10.72	QP
5	187.10	11.44	0.98	10.30	22.72	40.00	-17.28	QP
6	359.19	6.73	1.18	14.42	22.33	47.00	-24.67	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Model No.	FORCE-MATIC	Test Mode	TM1
Environmental Conditions	24.4°C, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

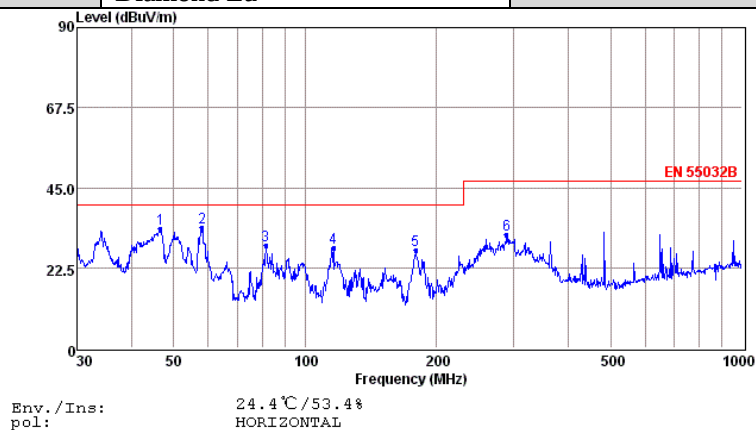


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	46.67	19.50	0.35	13.45	33.30	40.00	-6.70	QP
2	58.00	20.46	0.47	12.82	33.75	40.00	-6.25	QP
3	81.21	19.11	0.65	8.97	28.73	40.00	-11.27	QP
4	116.13	16.37	0.68	11.16	28.21	40.00	-11.79	QP
5	178.76	17.00	0.89	9.59	27.48	40.00	-12.52	QP
6	289.00	17.72	1.05	12.85	31.62	47.00	-15.38	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	FORCE-PLUS	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

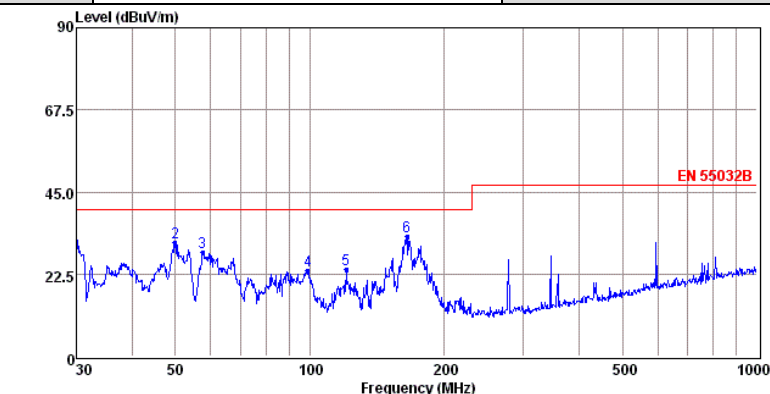


Env./Ins: 24.4℃/53.4%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.00	18.61	0.39	12.33	31.33	40.00	-8.67	QP
2	49.88	17.20	0.54	13.26	31.00	40.00	-9.00	QP
3	57.59	15.08	0.47	12.85	28.40	40.00	-11.60	QP
4	98.83	9.58	0.61	13.09	23.28	40.00	-16.72	QP
5	120.70	12.64	0.70	10.37	23.71	40.00	-16.29	QP
6	164.91	23.18	0.86	8.82	32.86	40.00	-7.14	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Model No.	FORCE-PLUS	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

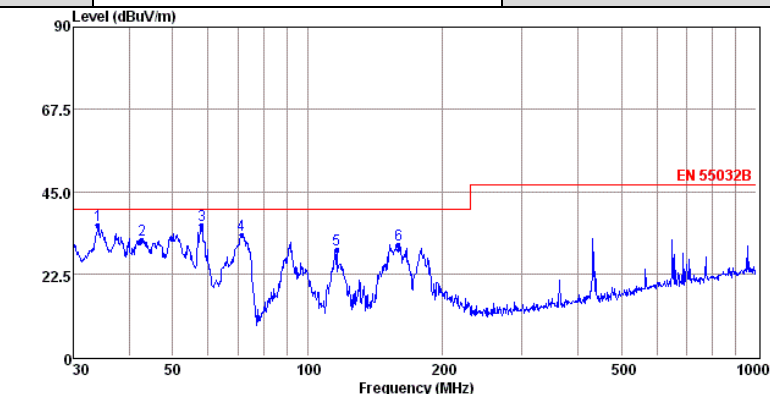


Env./Ins: 24.4℃/53.4%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.04	23.25	0.37	12.31	35.93	40.00	-4.07	QP
2	42.75	17.62	0.50	13.56	31.68	40.00	-8.32	QP
3	58.00	22.46	0.47	12.82	35.75	40.00	-4.25	QP
4	71.08	24.20	0.55	8.47	33.22	40.00	-6.78	QP
5	116.13	17.37	0.68	11.16	29.21	40.00	-10.79	QP
6	159.23	21.14	0.75	8.64	30.53	40.00	-9.47	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported


The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	FORCE-PLUS II	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

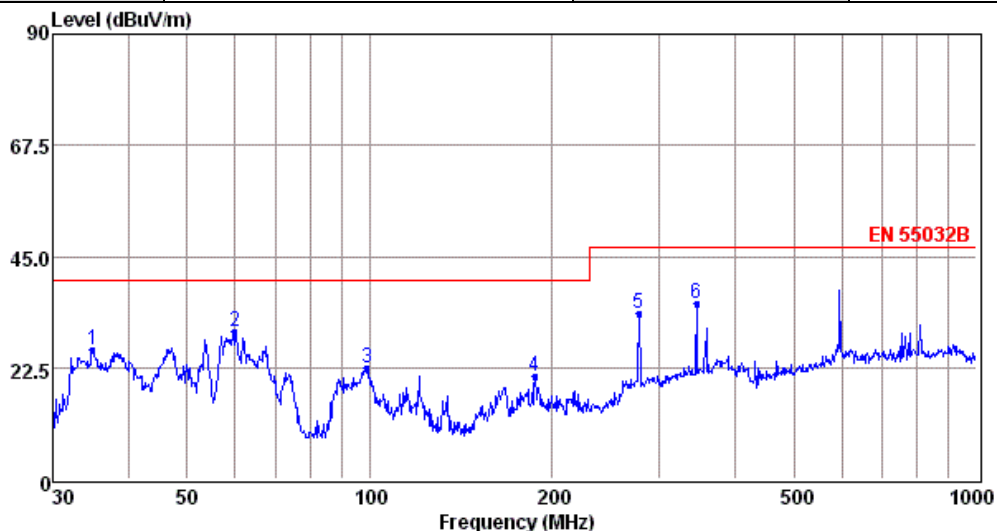

Env./Ins: 24.4℃/53.4%
 EUT: 门控系统
 M/N:
 Power Rating: AC 230V/50Hz
 Test Mode: TM1
 Operator: DIAMOND.LU
 Memo:

Model No.	FORCE-PLUS II	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

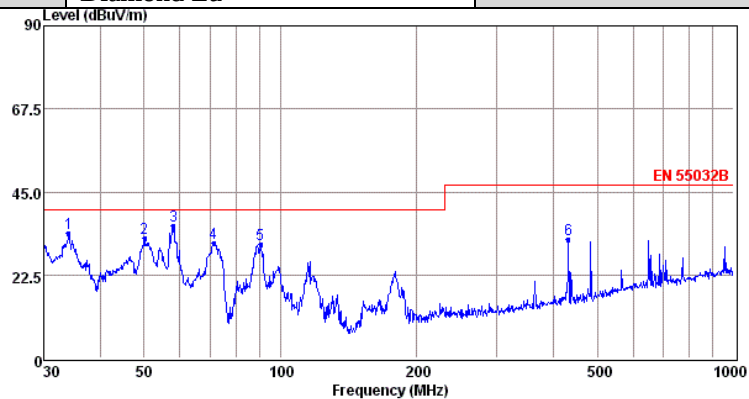


Env./Ins: 24.4℃/53.4%
 pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.04	21.25	0.37	12.31	33.93	40.00	-6.07	QP
2	50.06	18.76	0.54	13.25	32.55	40.00	-7.45	QP
3	58.00	22.46	0.47	12.82	35.75	40.00	-4.25	QP
4	71.08	22.20	0.55	8.47	31.22	40.00	-8.78	QP
5	90.22	18.25	0.68	11.94	30.87	40.00	-9.13	QP
6	432.55	15.30	1.18	15.53	32.01	47.00	-14.99	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	FORCE-ADVANCED	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

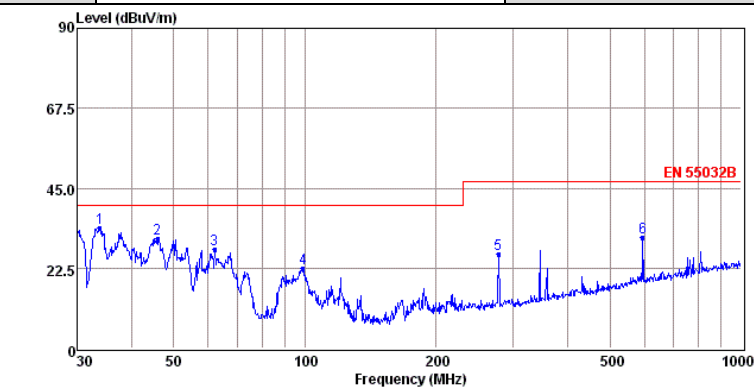


Env./Ins: 24.4℃/53.4%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	33.80	21.04	0.37	12.31	33.72	40.00	-6.28	QP
2	45.86	16.94	0.41	13.50	30.85	40.00	-9.15	QP
3	62.00	15.35	0.48	11.90	27.73	40.00	-12.27	QP
4	98.83	8.58	0.61	13.09	22.28	40.00	-17.72	QP
5	278.07	12.91	1.01	12.61	26.53	47.00	-20.47	QP
6	595.13	11.27	1.51	18.36	31.14	47.00	-15.86	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Model No.	FORCE-ADVANCED	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

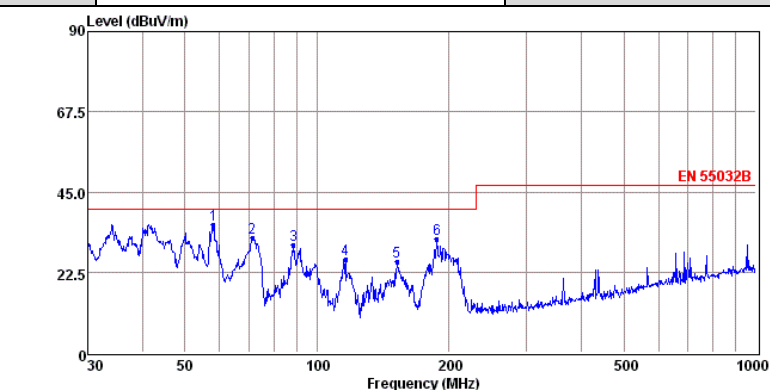


Env./Ins: 24.4℃/53.4%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	58.00	22.46	0.47	12.82	35.75	40.00	-4.25	QP
2	71.08	23.20	0.55	8.47	32.22	40.00	-7.78	QP
3	88.34	17.95	0.68	11.37	30.00	40.00	-10.00	QP
4	116.13	14.37	0.68	11.16	26.21	40.00	-13.79	QP
5	152.13	16.40	0.73	8.35	25.48	40.00	-14.52	QP
6	187.75	20.50	0.98	10.36	31.84	40.00	-8.16	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	FORCE-OREO	Test Mode	TM1
Environmental Conditions	24.4°C, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

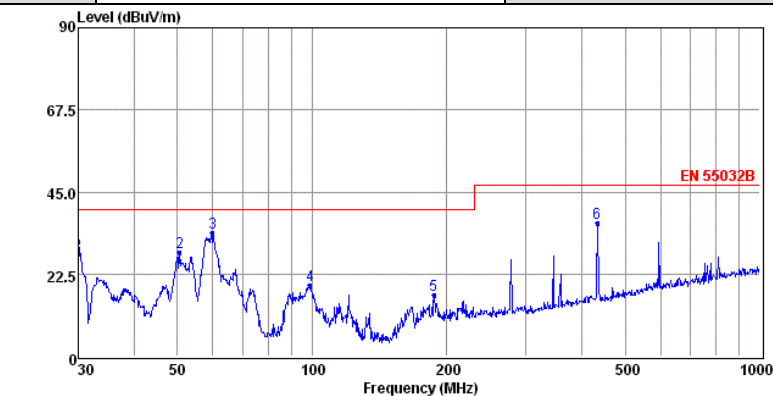


Env./Ins: 24.4°C/53.4%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.00	18.61	0.39	12.33	31.33	40.00	-8.67	QP
2	50.59	14.68	0.54	13.22	28.44	40.00	-11.56	QP
3	59.86	20.64	0.49	12.70	33.83	40.00	-6.17	QP
4	98.83	5.58	0.61	13.09	19.28	40.00	-20.72	QP
5	187.10	5.44	0.98	10.30	16.72	40.00	-23.28	QP
6	434.07	19.83	1.18	15.53	36.54	47.00	-10.46	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Model No.	FORCE-OREO	Test Mode	TM1
Environmental Conditions	24.4°C, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

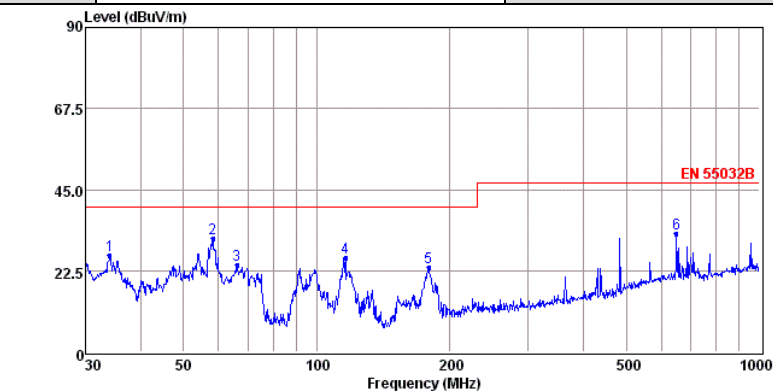


Env./Ins: 24.4°C/53.4%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.04	14.25	0.37	12.31	26.93	40.00	-13.07	QP
2	58.20	18.25	0.47	12.81	31.53	40.00	-8.47	QP
3	66.03	13.17	0.52	10.28	23.97	40.00	-16.03	QP
4	116.13	14.37	0.68	11.16	26.21	40.00	-13.79	QP
5	178.76	13.00	0.89	9.59	23.48	40.00	-16.52	QP
6	649.66	12.62	1.58	18.63	32.83	47.00	-14.17	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	FORCE-UNO	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	Diamond Lu		

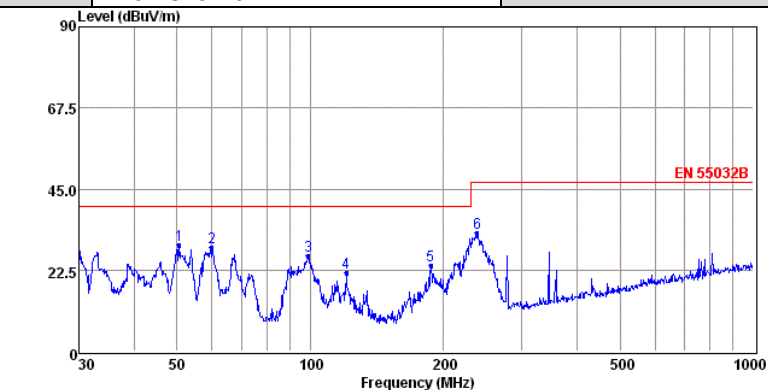


Env./Ins: 24.4℃/53.4%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	50.59	15.68	0.54	13.22	29.44	40.00	-10.56	QP
2	59.86	15.64	0.49	12.70	28.83	40.00	-11.17	QP
3	98.83	12.58	0.61	13.09	26.28	40.00	-13.72	QP
4	120.70	10.64	0.70	10.37	21.71	40.00	-18.29	QP
5	187.10	12.44	0.98	10.30	23.72	40.00	-16.28	QP
6	238.31	19.89	0.96	12.01	32.86	47.00	-14.14	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Model No.	FORCE-UNO	Test Mode	TM1
Environmental Conditions	24.4℃, 53.4% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	Diamond Lu		

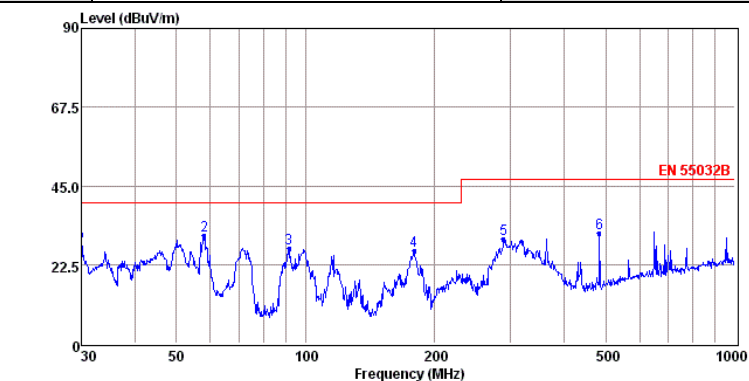

Env./Ins: 24.4℃/53.4%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.00	18.50	0.39	12.33	31.22	40.00	-8.78	QP
2	58.00	17.46	0.47	12.82	30.75	40.00	-9.25	QP
3	91.49	14.47	0.56	12.18	27.21	40.00	-12.79	QP
4	178.76	16.00	0.89	9.59	26.48	40.00	-13.52	QP
5	289.00	15.72	1.05	12.85	29.62	47.00	-17.38	QP
6	483.91	13.86	1.39	16.17	31.42	47.00	-15.58	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported


Test Mode: TM 1 (above 1GHz)	Tested by: FORCE-ULTIMATE
Test voltage: AC 230V/50Hz	Test Distance: 3m
Detector Function: Peak+AV	Test Results: Passed

Pol.	Frequency MHz	Emission Level dBμV/m		Limits dBμV/m		Margin dBμV/m	
H	1306.35	51.44	36.05	70.00	50.00	-18.56	-13.95
	1841.96	53.18	32.84	70.00	50.00	-16.82	-17.16
	2116.45	54.29	33.63	70.00	50.00	-15.71	-16.37
	3387.95	52.73	33.78	74.00	54.00	-21.27	-20.22
	4330.88	55.77	31.42	74.00	54.00	-18.23	-22.58
	5761.38	54.34	34.42	74.00	54.00	-19.66	-19.58
V	1305.47	51.25	35.69	70.00	50.00	-18.75	-14.31
	1841.52	53.03	33.68	70.00	50.00	-16.97	-16.32
	2116.97	55.21	34.06	70.00	50.00	-14.79	-15.94
	3387.02	52.64	33.08	74.00	54.00	-21.36	-20.92
	4331.38	54.81	30.86	74.00	54.00	-19.19	-23.14
	5762.16	54.12	35.28	74.00	54.00	-19.88	-18.72

1. Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
2. Measurements above show only up to 6 maximum emissions noted.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5. HARMONIC CURRENT EMISSIONS

5.1. Test Configuration

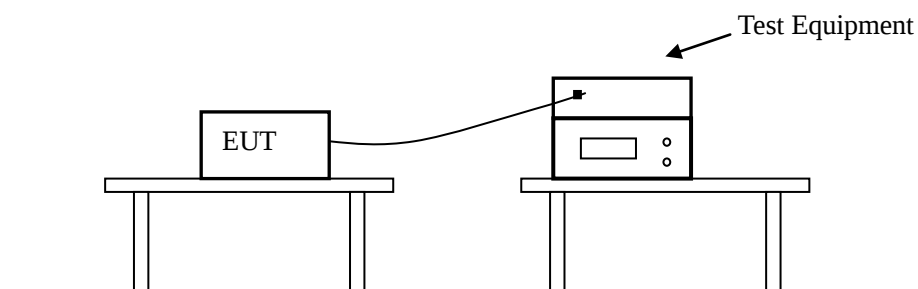

5.2. Test Standard


According to ETSI EN 301489-1 V2.2.0 (2017-03) & EN 61000-3-2: 2014

5.3. Test Data

N/A, According standard EN 61000-3-2, Harmonic current is unnecessary to test.

6. VOLTAGE FLUCTUATION AND FLICKER

6.1. Test Configuration

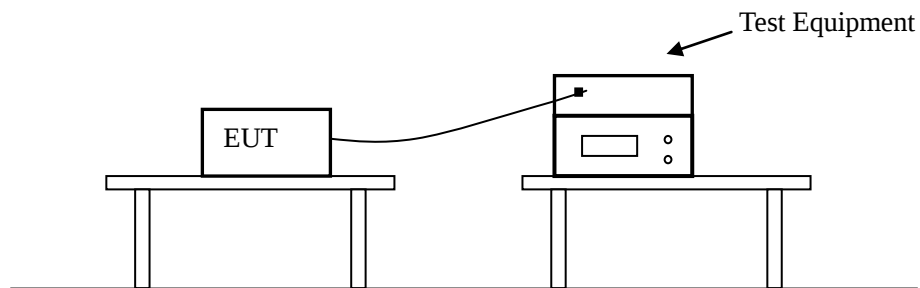

6.2. Test Standard

According to ETSI EN 301489-1 V2.2.0 (2017-03) & EN 61000-3-3: 2013

6.3. Test Data

Type of Test:	Flickermeter Test - Table			
Power Analyzer:	Voltech PM6000 SN: 200006700523 Firmware Version: v1.21.07RC2			
	Channel(s):			
	1. SN: 090015502053, 28 Adjusted Date: 22 JUN 2011. 2. SN:None Adjusted Date:None			
	3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None			
	5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None			
	Shunt(s):			
	1. SN: 091024301916, 4 Adjusted Date: 23 JUN 2011. 2. SN:None Adjusted Date:None			
	3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None			
	5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None			
AC Source:	Mains / Manual Source			
Overall Result:	Notes:			
PASS	Measurement method - Voltage			

	Pst	dc (%)	dmax (%)	d(t) > 3.3%(ms)
Limit	1.000	3.300	4.000	500
Reading 1	0.089	0.005	0.201	0

7. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST

7.1. Performance criteria for Continuous phenomena applied to Transmitter (CT)

For equipment of type II or type III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence.

Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

7.2. Performance criteria for Transient phenomena applied to Transmitter (TT)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

7.3. Performance criteria for Continuous phenomena applied to Receiver (CR)

For equipment of type II or III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

7.4. Performance criteria for Transient phenomena applied to Receiver (TR)


For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

Performance criteria for ETSI EN 301 489-3 V2.1.1 (2017-03)

Criteria	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

8. RF ELECTROMAGNETIC FIELD (80 MHZ-6000 MHZ)

8.1. Test Configuration

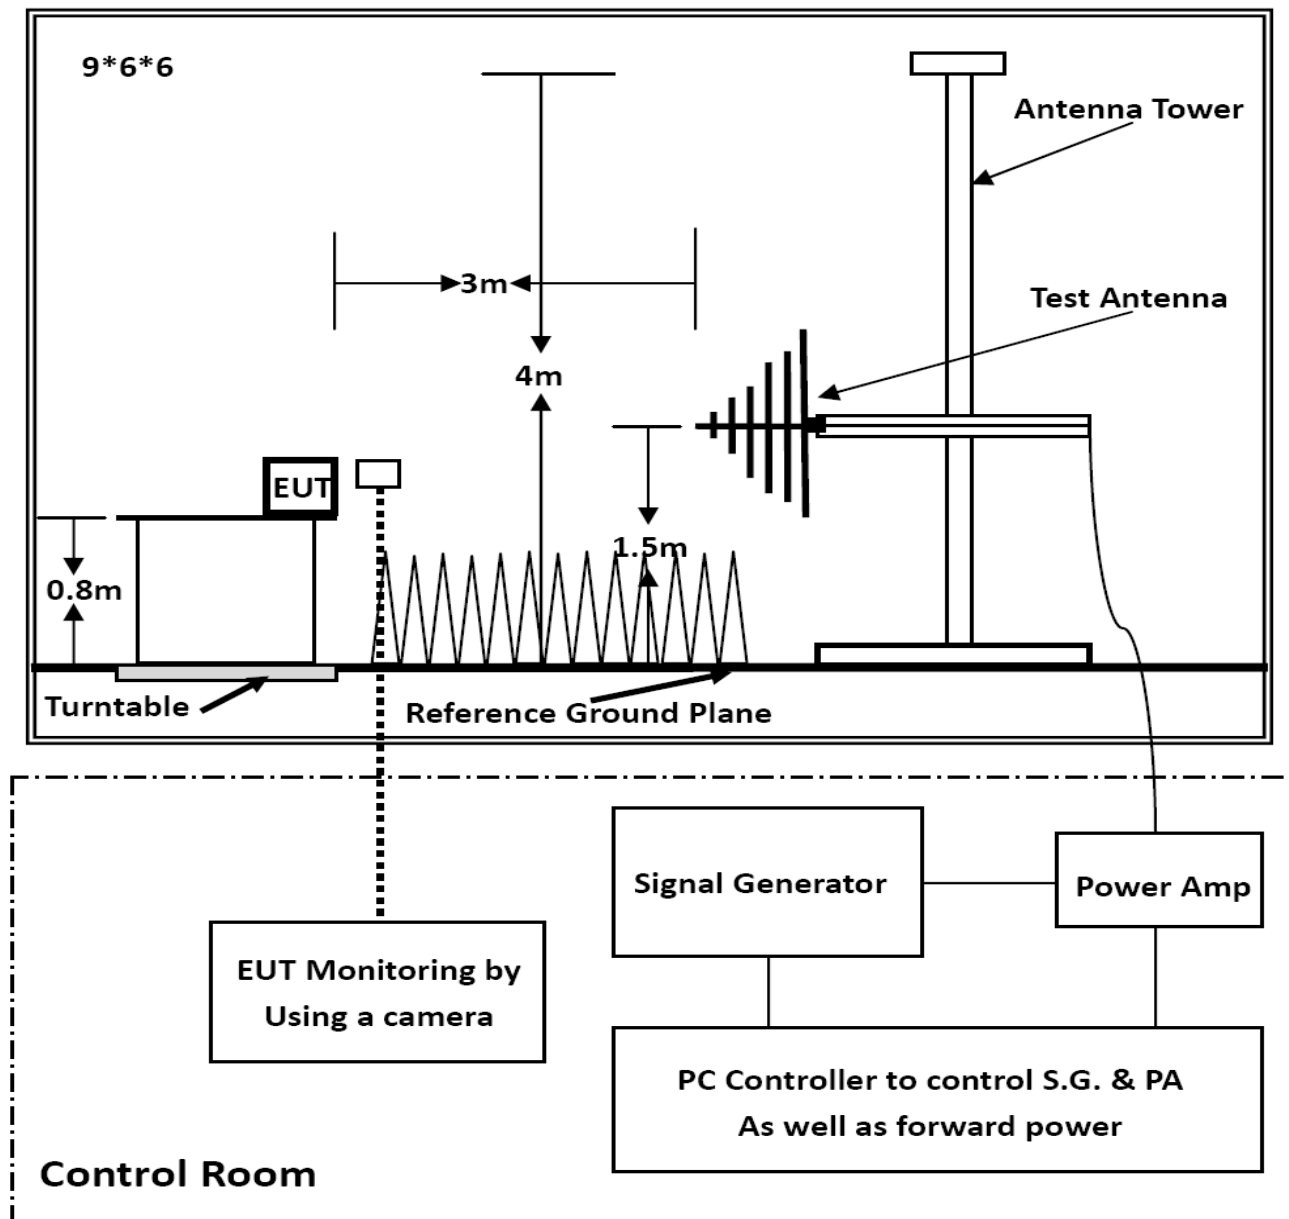

8.2. Test Standard

ETSI EN 301 489-1, ETSI EN 301 489-3 /(EN 61000-4-3: 2006+A2: 2010)

Test level 2 at 3V / m.

8.3. Severity Level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

Performance criterion: A

8.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80-6000 MHz
4. Dwell time of radiated	0.0015 decade/s
5. Waiting Time	3 Sec.

8.5. Test Result

PASS.

Please refer to the following page.

RF ELECTROMAGNETIC FIELD

Standard	☐ IEC 61000-4-3 ☒ EN 61000-4-3		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	24.4℃
M/N	FORCE-ULTIMATE	Humidity	53.4%
Test Mode	TM1-TM3	Criterion	B
Test Engineer	Diamond Lu		

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Field Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	TT,TR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	TT,TR	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80--6000	3	See Note	Front, Right, Left, Back	Pass

TM2-TM3 Test Result:


EUT Working Mode	Antenna Polarity	Frequency (MHz)	Field Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	TT,TR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	TT,TR	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80--6000	3	See Note	Front, Right, Left, Back	Pass

***Note: Unintentional transmission is not founded from the EUT.

9. ELECTROSTATIC DISCHARGE

Please refer to ETSI EN 301 489-1 V2.1.1 (2017-02) and EN 61000-4-2.

9.1. Test Configuration

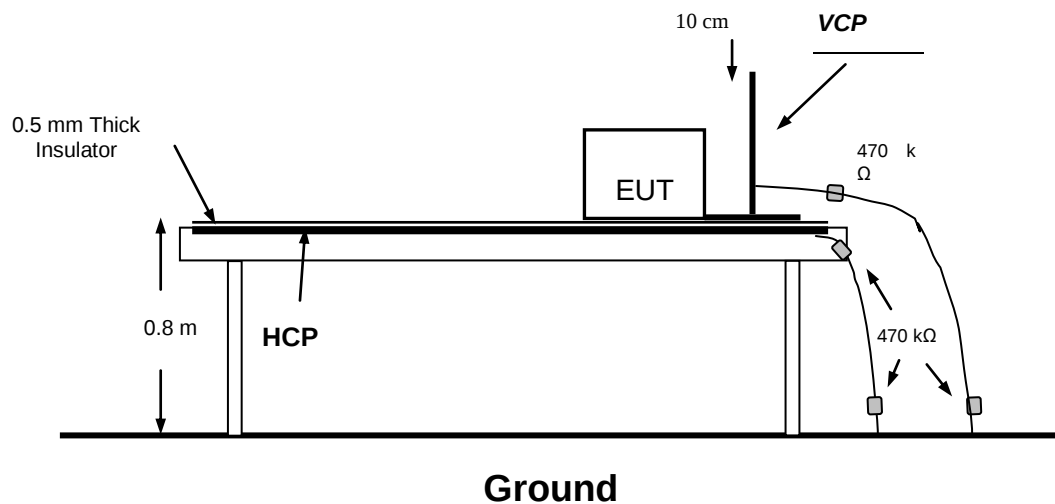

EN 61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.5 by 1.0-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

9.2. Test Procedure

ETSI EN 301 489-1 V2.1.1 (2017-02)/ EN 61000-4-2: 2009

Test level 3 for Air Discharge at ± 8 kV

Test level 2 for Contact Discharge at ± 4 kV

9.2.1. Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

9.2.2. Contact Discharge

All the procedure shall be same as Section 9.2.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.


9.2.3. Indirect Discharge For Horizontal Coupling Plane


At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

9.2.4. Indirect Discharge For Vertical Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.3. Test Data

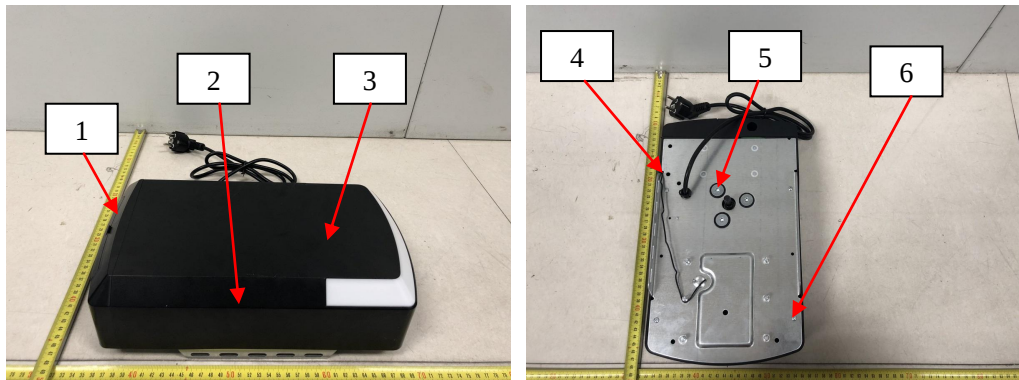

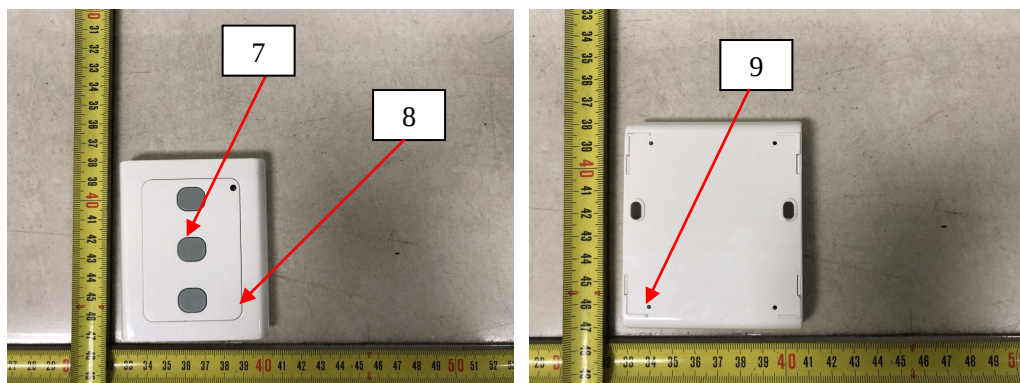

Note: The contacted discharge points are 4, 5, 6 and 9, and the air discharge points are 1, 2, 3, 7, and 8.

Please refer to the following page.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-ULTIMATE	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-ECO	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-ARC	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-MATIC	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-PLUS	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-PLUS II	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-ADVANCED	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-OREO	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	22.2℃
M/N	FORCE-UNO	Humidity	52.9%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM3	Test Engineer	Diamond Lu

TEST RESULT OF SRD

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM2-TM3


Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note:

The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

10. ELECTRICAL FAST TRANSIENT IMMUNITY

10.1. Test Configuration

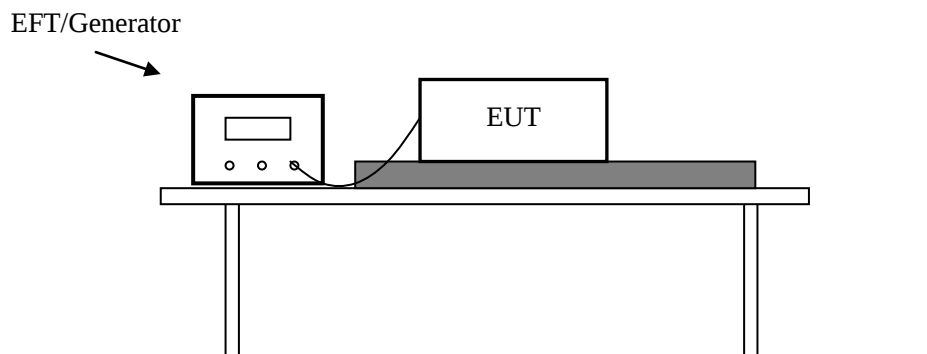

10.2. Test Standard

ETSI EN 301 489-1 V2.1.1 (2017-02)/ EN61000-4-4: 2012

Test level 2 at 1 kV

Test level

Level	Open Circuit Output Test Voltage $\pm 10\%$	
	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special

Performance criterion: B

10.3. Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

10.4.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

10.4.2. For signal lines and control lines ports: No I/O ports. It's unnecessary to test.

10.4.3. For DC output line ports: It's unnecessary to test.

10.4. Test Data

Pass

Please refer to the following page.

Electrical Fast Transient/Burst Test Results

Standard	☐ IEC 61000-4-4 ☒ EN 61000-4-4		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	24.2.℃
M/N	FORCE-ULTIMATE	Humidity	52.1%
Test Mode	TM1-TM3	Criterion	B
Test Engineer	Diamond Lu		

TEST RESULT OF TM1


Line	Test Voltage	Polarity	Observation	Result (Pass/Fail)
L	1KV	+/-	TT, TR	Pass
N	1KV	+/-	TT, TR	Pass
L-N	1KV	+/-	TT, TR	Pass

TEST RESULT OF TM2-TM3

Line	Test Voltage	Polarity	Result (Pass/Fail)
L	1KV	+/-	Pass
N	1KV	+/-	Pass
L-N	1KV	+/-	Pass

11. RF COMMON MODE

11.1. Test Configuration

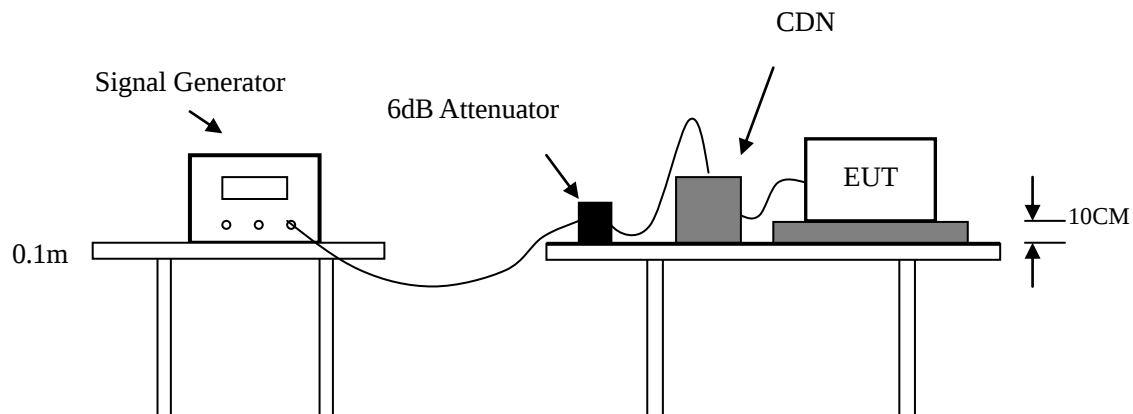

11.2. Test Standard

ETSI EN 301 489-1 V2.1.1 (2017-02)/ EN 61000-4-6: 2014

Test level 2 at 3 V (r.m.s.), 0.15 MHz ~ 80 MHz,

Modulation type: AM

Modulation depth: 80%

Modulation signal: 1 kHz

Test level

Level	Voltage Level (r.m.s.) (V)
1	1
2	3
3	10
X	Special

Performance criterion: A

11.3. Test Procedure

11.3.1. Let the EUT work in test mode and test it.

11.3.2. The EUT are placed on an insulating support 0.1 m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3 m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

11.3.3. The disturbance signal described below is injected to EUT through CDN.

11.3.4. The EUT operates within its operational mode(s) under intended climatic conditions after power on.

11.3.5. The frequency range is swept from 150 kHz to 80 MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

11.3.6. The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

11.3.7. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

11.4. Test Data

Pass

Injected Currents Susceptibility Test Results

Standard	☐ IEC 61000-4-6 ☒ EN 61000-4-6		
Applicant	Wuxi Force Technology Co., Ltd.		
EUT	Garage Door Opener	Temperature	24.5℃
M/N	FORCE-ULTIMATE	Humidity	53.8%
Test Mode	TM1-TM3	Criterion	A
Test Engineer	Diamond Lu		

TEST RESULT OF TM1

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Observation	Result (Pass/Fail)
0.15 ~ 80	AC Mains	3V	CT, CR	Pass

TEST RESULT OF TM2-TM3

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Result (Pass/Fail)
0.15 ~ 80	AC Mains	3V	Pass

Remark:

1. Modulation Signal:1kHz 80% AM


2. Measurement Equipment :

Simulator: CIT-10 (FRANKONIA)

CDN : ☒CDN-M2 (FRANKONIA)☐CDN-M3 (FRANKONIA)

12. SURGES, LINE TO LINE AND LINE TO GROUND

12.1. Test Configuration

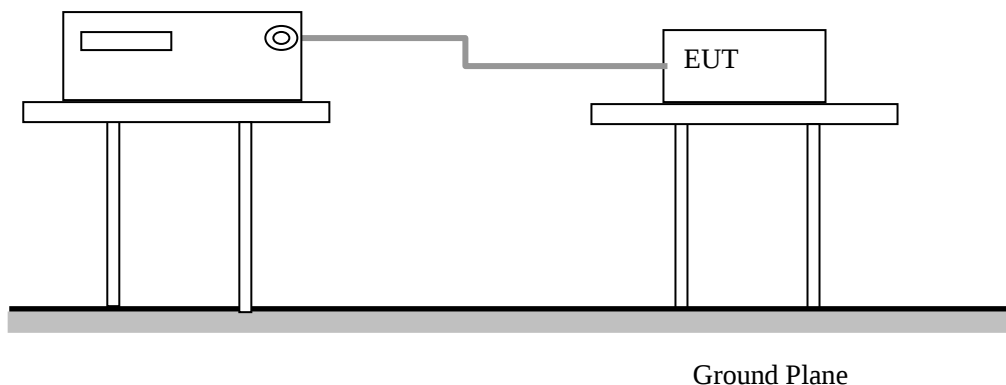

12.2. Test Standard

ETSI EN 301 489-1 V2.1.1 (2017-02) / EN 61000-4-5: 2014+A1: 2017

L-N: Test level 2 at 1 kV

L-PE, N-PE Test Level 3 at 2kV

Test Level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special

Performance criterion: B

12.3. Test Procedure

- 12.3.1. For line to line coupling mode, provide a 0.5 kV 1.2/50us voltage surge (at open-circuit condition).
- 12.3.2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 12.3.3. Different phase angles are done individually.
- 12.3.4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.


12.4. Test Data

Surge Immunity Test Result			
Standard	☐ IEC 61000-4-5 ☒ EN 61000-4-5		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	24.2℃
M/N	FORCE-ULTIMATE	Humidity	52.1%
Test Mode	TM1-TM3	Criterion	A
Test Engineer	Diamond Lu		

TEST RESULT OF TM1						
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Observation	Result (Pass/Fail)
L-N	+	0°, 90°, 180°, 270°	5	1.0	TT, TR	Pass
	-	0°, 90°, 180°, 270°	5	1.0	TT, TR	Pass
TEST RESULT OF TM2-TM3						
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result (Pass/Fail)	
L-N	+	0°, 90°, 180°, 270°	5	1.0	Pass	
	-	0°, 90°, 180°, 270°	5	1.0	Pass	

13. VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST

13.1. Test Configuration

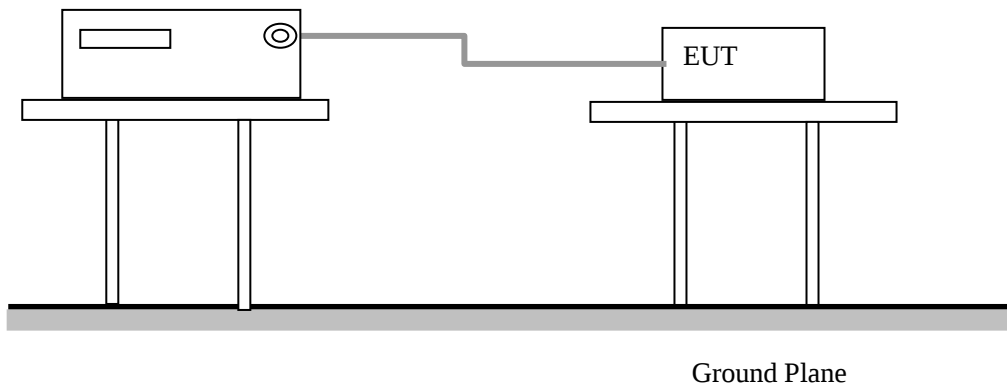

13.2. Test Standard

ETSI EN 301 489-1 V2.1.1 (2017-02)/ EN 61000-4-11: 2004+A1: 2017
Test levels and Performance Criterion

Test Level

Voltage Reduction %UT	Voltage dips %UT	Duration (in period)
100	0	0.5
100	0	1
30	70	5
Voltage Reduction %UT	Voltage Interruptions %UT	Duration (in period)
100	0	250

Performance criterion: B&C

13.3. Test Procedure

13.3.1. The interruption is introduced at selected phase angles with specified duration.

13.3.2. Record any degradation of performance.

13.4. Test Data

Voltage Dips And Interruptions Test Results			
Standard	☐ IEC 61000-4-11 ☒ EN 61000-4-11		
Applicant	Wuxi Force Technology Co., Ltd		
EUT	Garage Door Opener	Temperature	24.2℃
M/N	FORCE-ULTIMATE	Humidity	52.1%
Test Mode	TM1-TM3	Criterion	A
Test Engineer	Diamond Lu		


TEST RESULT OF TM1				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Observation	Result (Pass/Fail)
0	100	0.5P	TT, TR	Pass
0	100	1P	TT, TR	Pass
70	30	25P	TT, TR	Pass
0	100	250P	TT, TR	Pass
TEST RESULT OF TM2-TM3				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Result (Pass/Fail)	
0	100	0.5P	Pass	
0	100	1P	Pass	
70	30	25P	Pass	
0	100	250P	Pass	

14. LIST OF MEASURING EQUIPMENT


Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	AUDIX	E3	/	2018/6/16	2019/6/15
2	EMI Test Receiver	R&S	ESPI	101840	2018/6/16	2019/6/15
3	Artificial Mains	R&S	ENV216	101288	2018/6/16	2019/6/15
4	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2018/6/16	2019/6/15
5	Positioning Controller	MF	MF-7082	/	2018/6/16	2019/6/15
6	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2018/7/26	2019/7/25
7	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2018/7/2	2019/7/1
8	EMI Test Receiver	R&S	ESR 7	101181	2018/6/16	2019/6/15
9	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2018/11/15	2019/11/14
10	AMPLIFIER	QuieTek	QTK	CHM/0809065	2018/11/15	2019/11/14
11	RF Cable-R03m	Jye Bao	RG142	CB021	2018/6/16	2019/6/15
12	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2018/6/16	2019/6/15
13	Power Analyzer Test System	Voltech	PM6000	2.00007E+11	2018/6/16	2019/6/15
14	RS Test Software	Tonscend	/	/	2018/6/16	2019/6/15
15	ESG Vector Signal Generator	Agilent	E4438C	MY42081396	2018/11/15	2019/11/14
16	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2018/6/16	2019/6/15
17	RF POWER AMPLIFIER	OPHIR	5225R	1052	NCR	NCR
18	RF POWER AMPLIFIER	OPHIR	5273F	1019	NCR	NCR
19	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	NCR	NCR
20	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-484	NCR	NCR
21	Electric field probe	Narda S.TS./PMM	EP601	611WX80208	2019/3/25	2020/3/24
22	Sound Level meter	BK Precision	735	7.35009E+15	2018/6/16	2019/6/15
23	Audio Analyzer	R&S	UPV	1146.2003K02-101 721-UW	2018/6/16	2019/6/15
24	Mouse Simulation	Brueel & Kjaer	4227	A0304216	2018/6/16	2019/6/15
25	Ear Simulation and supply	Brueel & Kjaer	2669.4182.5935	A0305284	2018/6/16	2019/6/15
26	Acoustical Calibrators	Brueel & Kjaer	4231	A0304215	2018/6/16	2019/6/15
27	ESD Simulator	SCHLODER	SESD 230	604035	2018/7/2	2019/7/1
28	California PACITANCE COUPLING CLAMP	3CTEST	EFTC	EC0441098	2018/6/16	2019/6/15
29	Simulator	FRANKONIA	CIT-10/75	A126A1195	2018/6/16	2019/6/15
30	CDN	FRANKONIA	CDN-M2+M3	A2210177	2018/6/16	2019/6/15
31	6dB Attenuator	FRANKONIA	DAM25W	1172040	2018/6/16	2019/6/15
32	Immunity Simulative Generator	EM TEST	UCS500 M4	0101-34	2018/11/15	2019/11/14
33	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2018/6/16	2019/6/15
34	Power frequency mag-field generator System	EVERFINE	EMS61000-8K	906003	2018/6/16	2019/6/15
35	Impedance Stabilization Network	TESEQ	ISN T800	45130	2018-11-15	2019-11-14

Note: All equipment is calibrated through GUANGZHOU LISAI Calibration and Test Co., Ltd.


15. TEST SETUP PHOTOGRAPHS

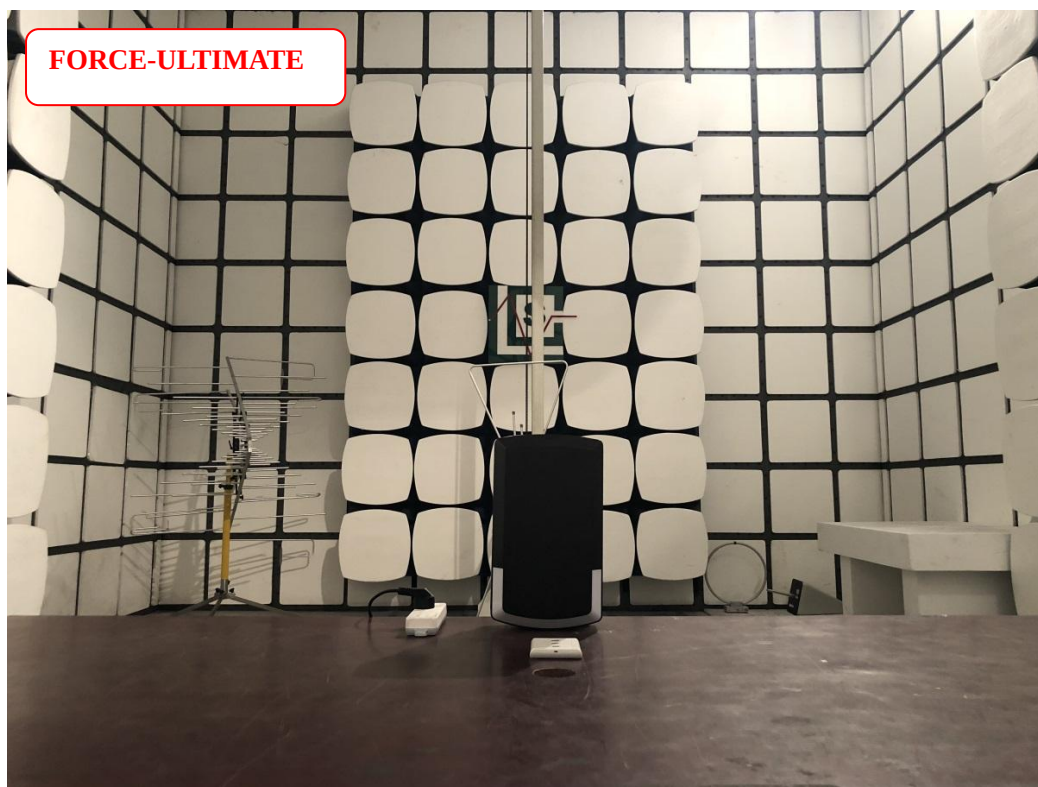

Radiated Emission below 1GHz

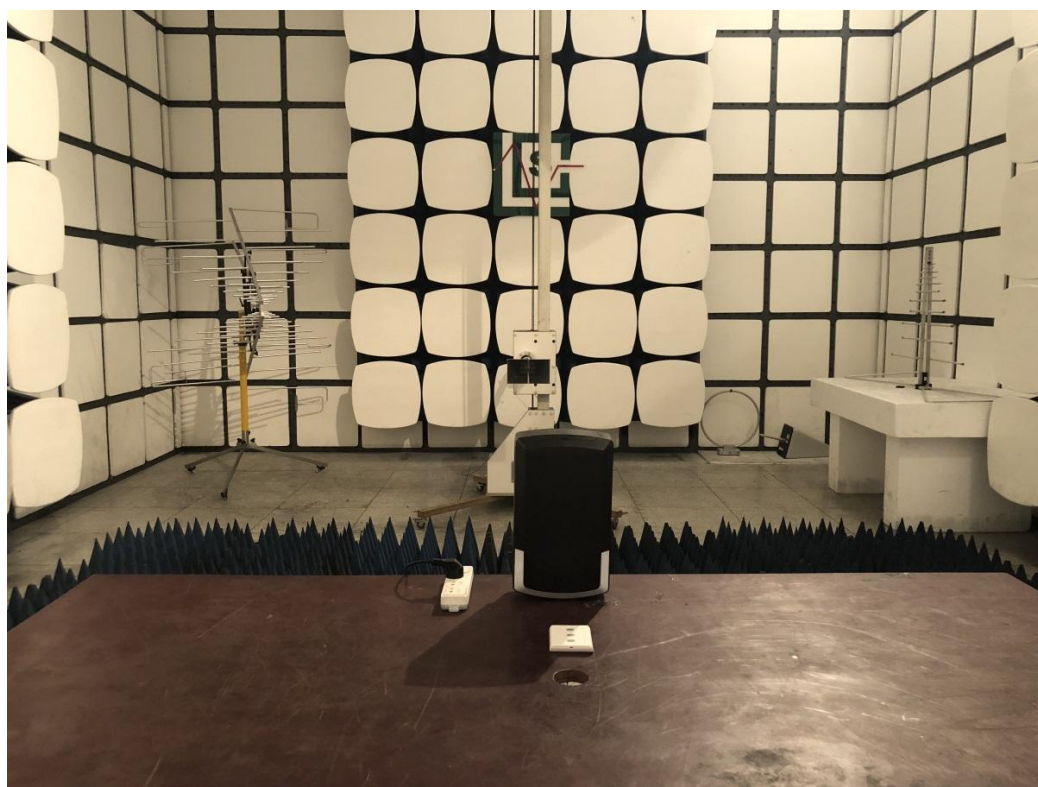


Radiated Emission Above 1GHz

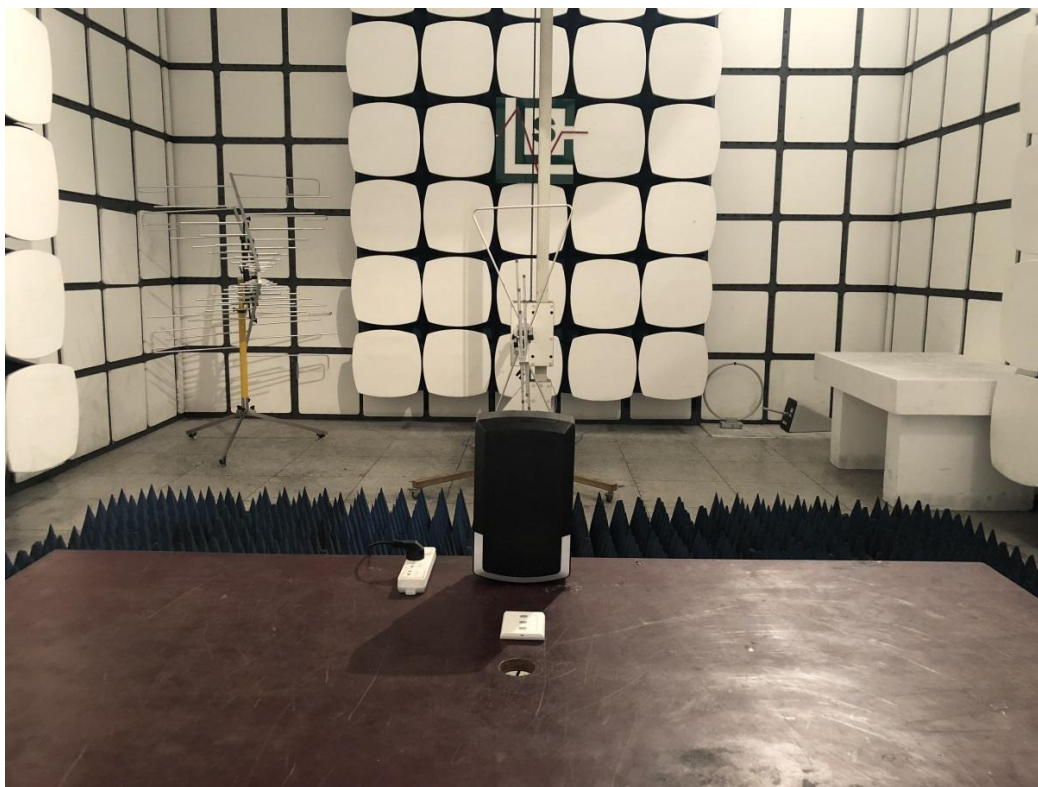

RS



ESD

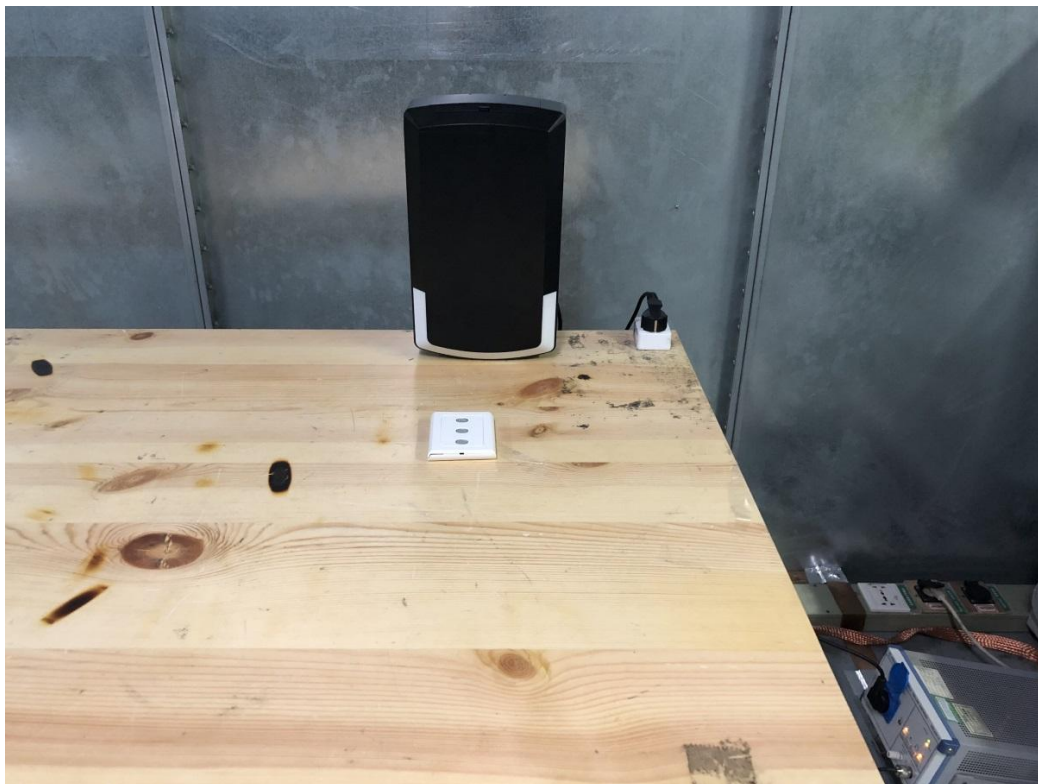

Conducted Emission



SURGES




CS




HARMONIC&FLICKER




VOLTAGE

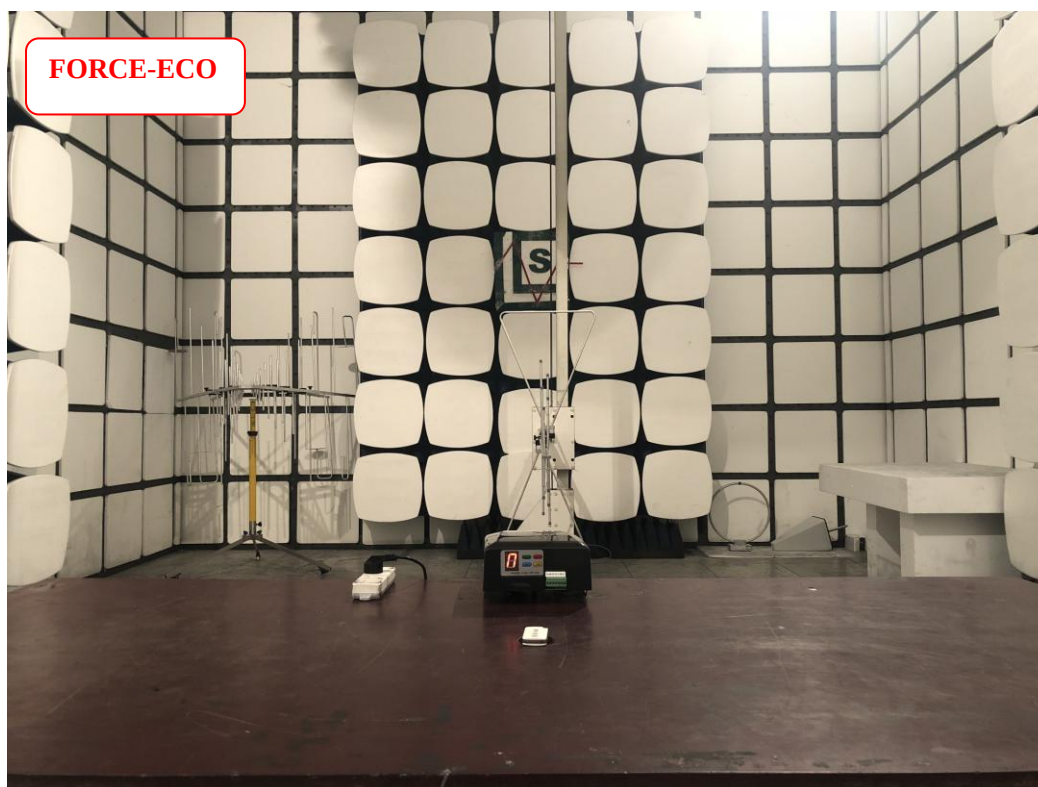

Radiated Emission below 1GHz

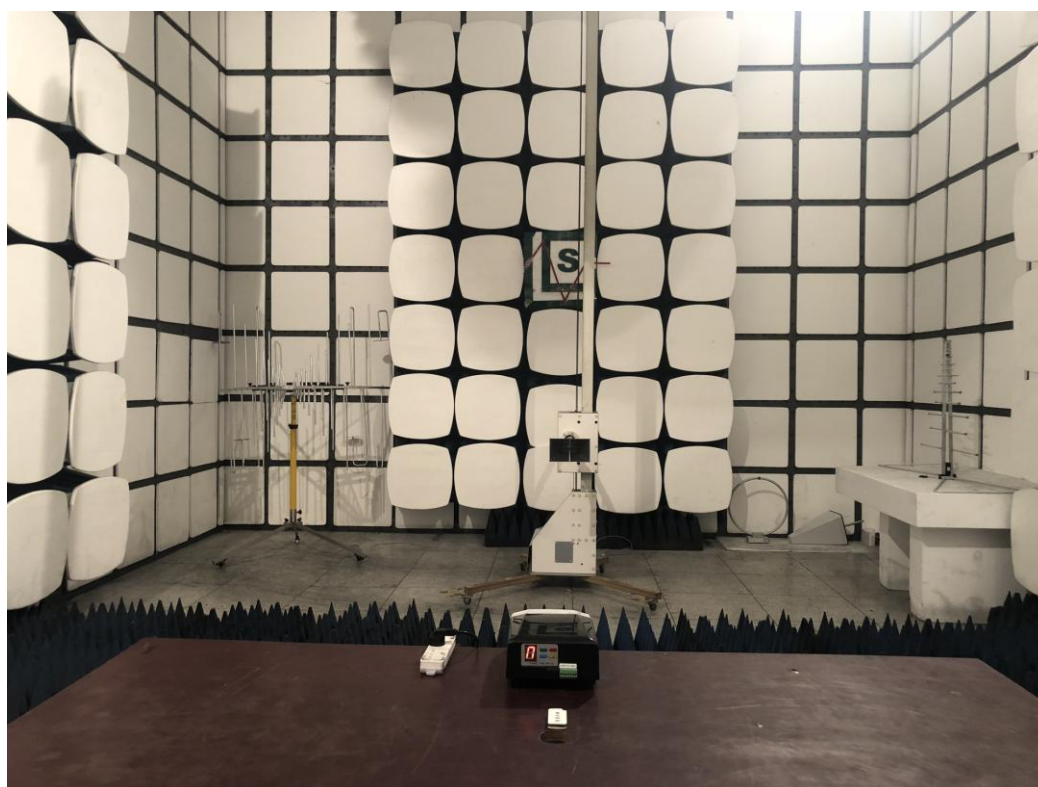

Radiated Emission Above 1GHz

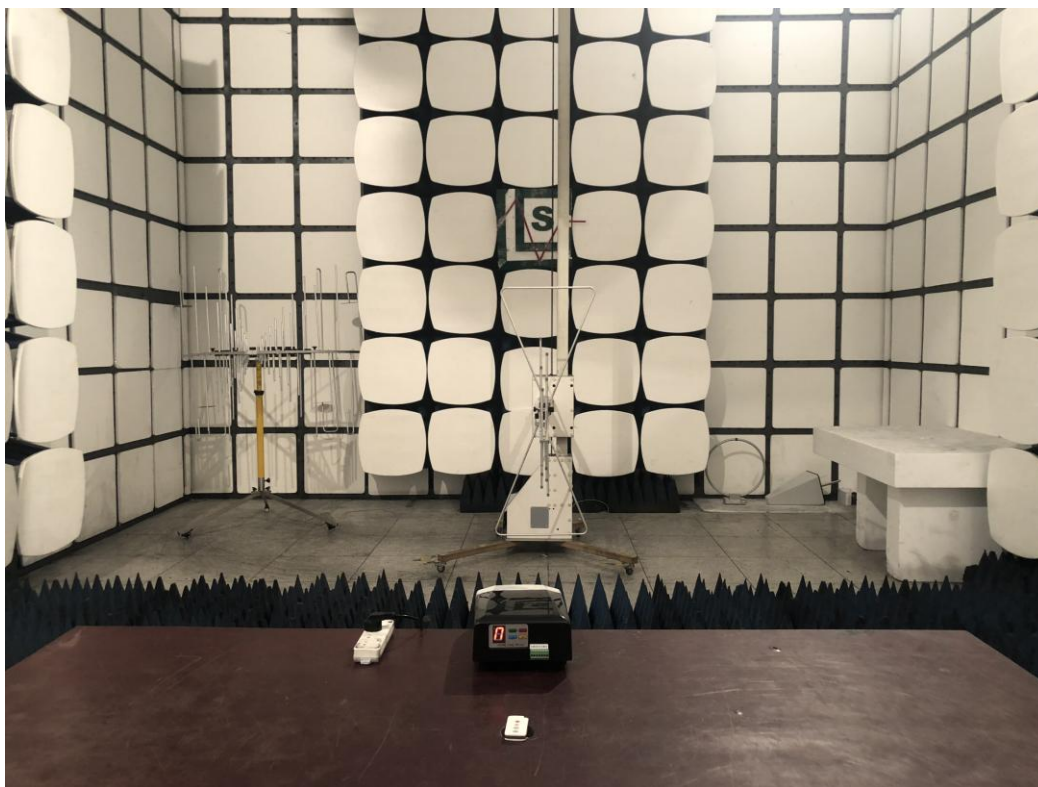

RS



ESD



Conducted Emission



SURGES




CS




HARMONIC&FLICKER




VOLTAGE

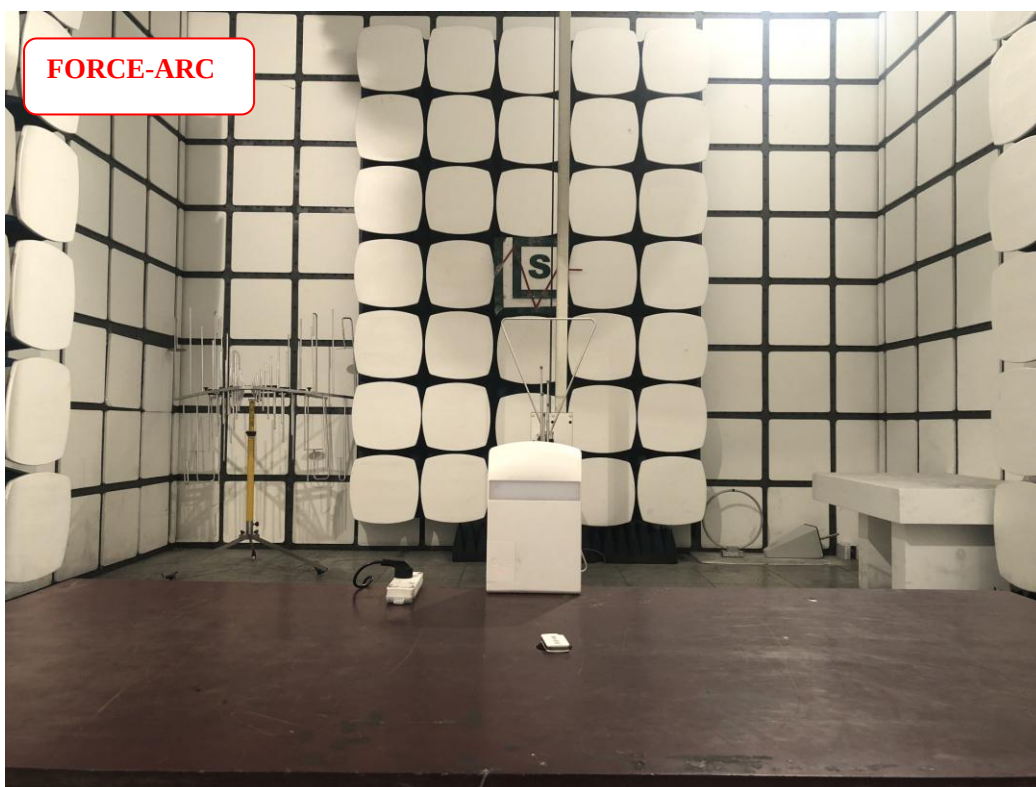

Radiated Emission below 1GHz

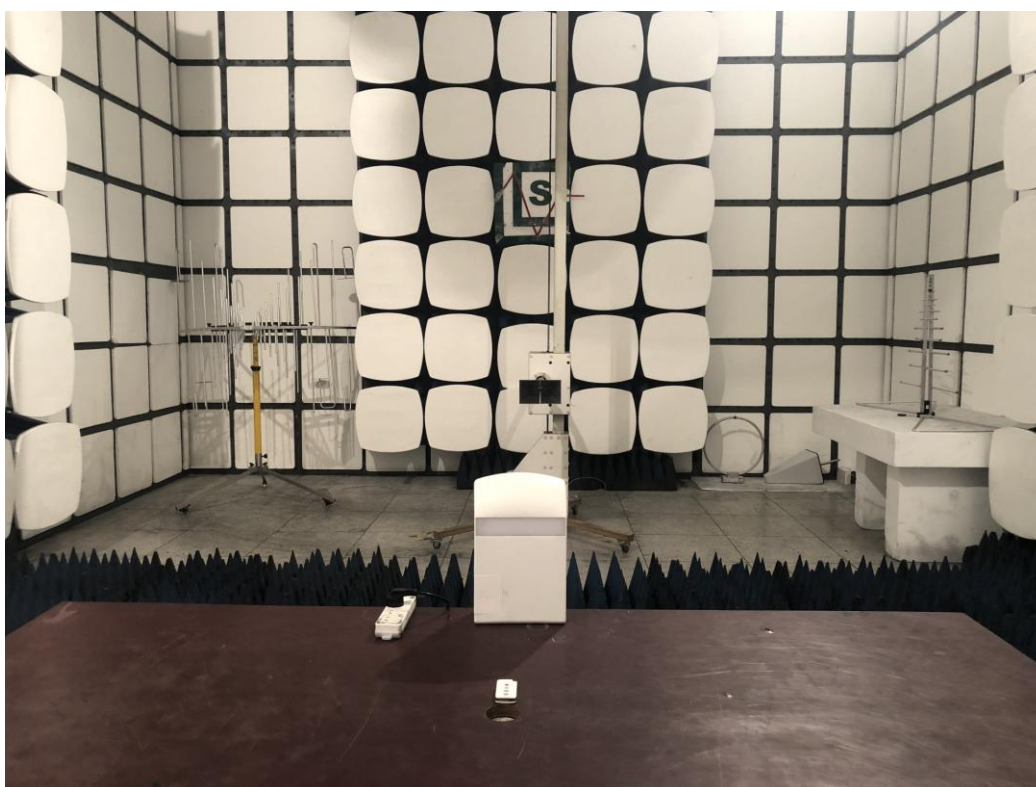

Radiated Emission Above 1GHz

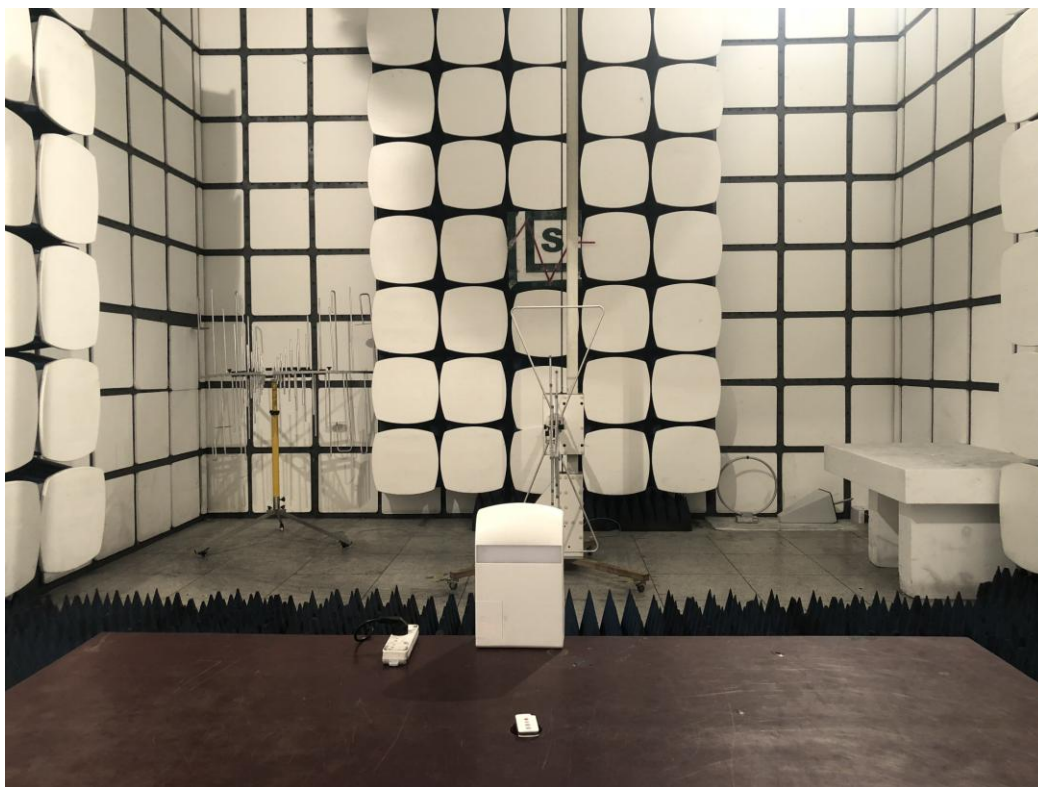

RS



ESD



Conducted Emission




SURGES



CS




HARMONIC&FLICKER

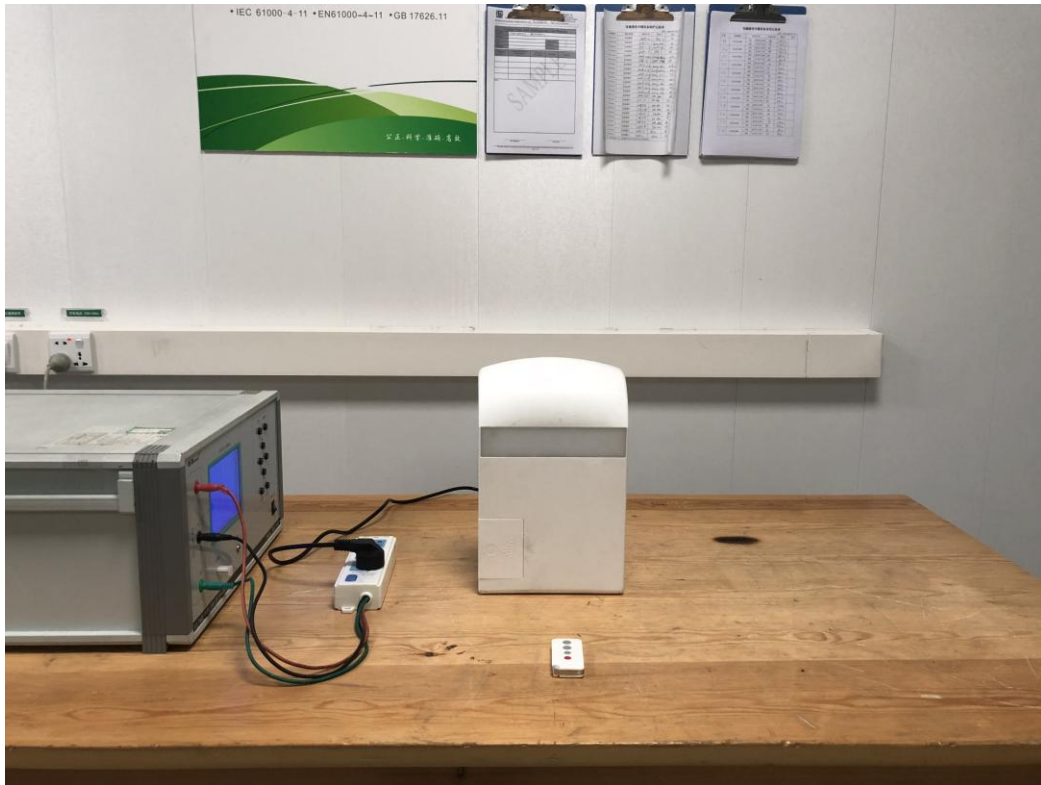


VOLTAGE



Radiated Emission below 1GHz

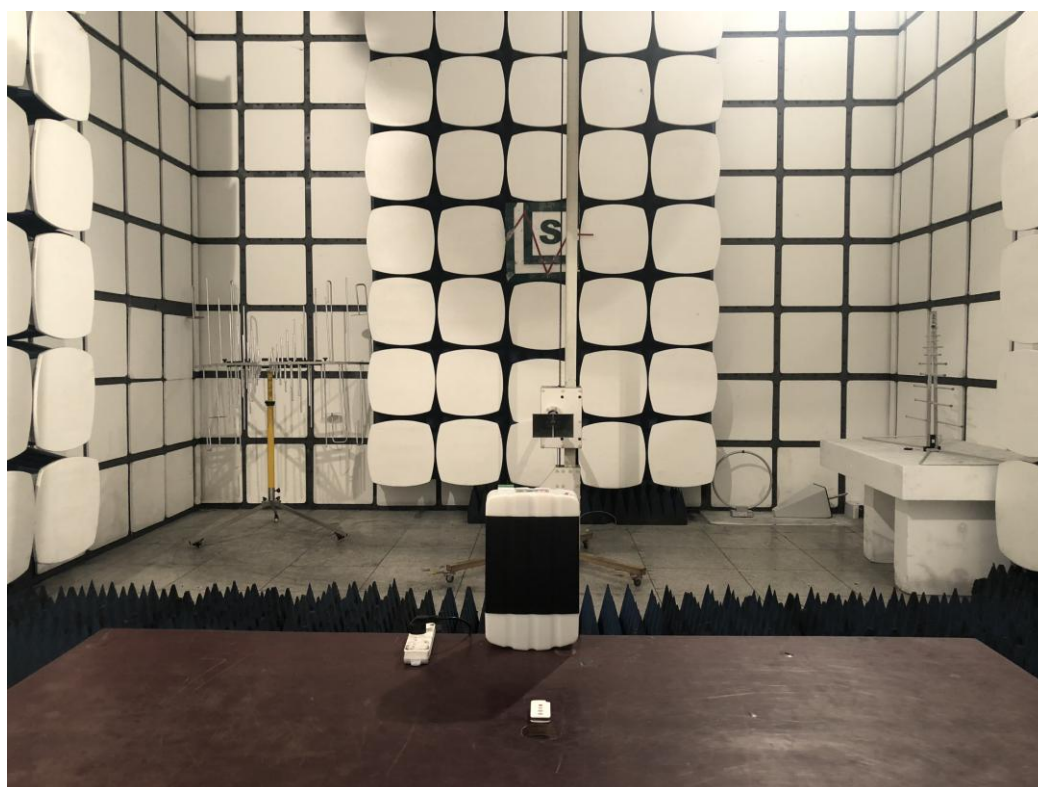

Radiated Emission Above 1GHz

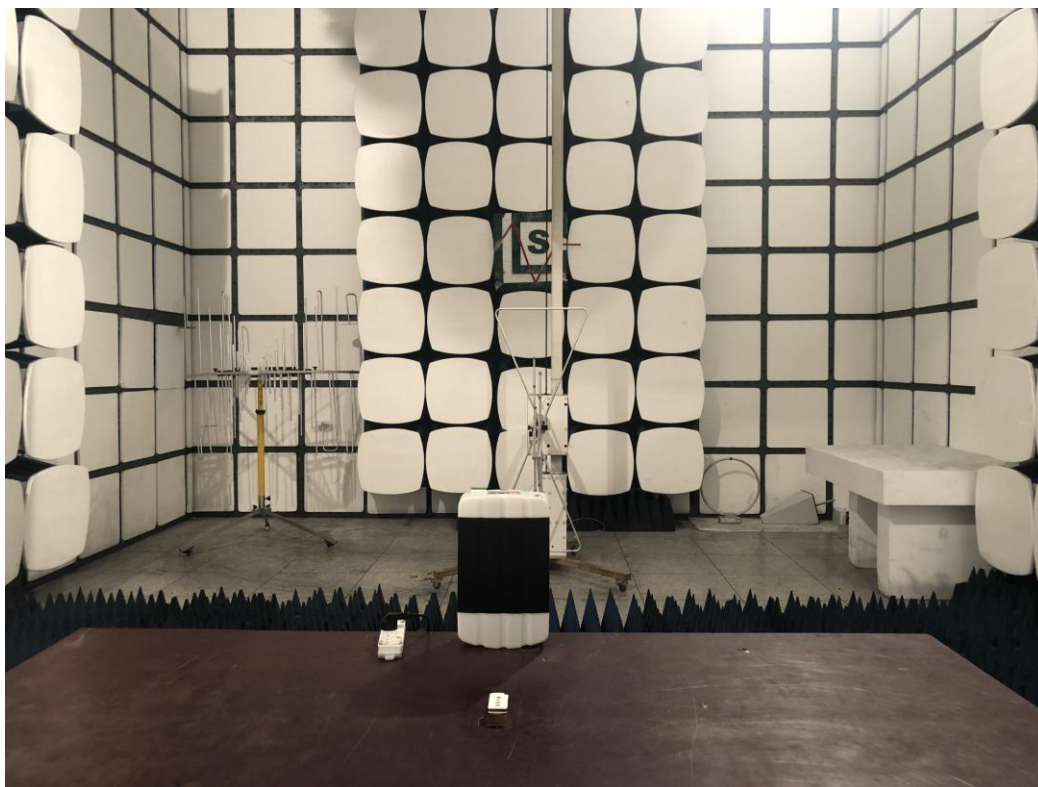

RS



ESD



Conducted Emission



SURGES




CS



HARMONIC&FLICKER




VOLTAGE

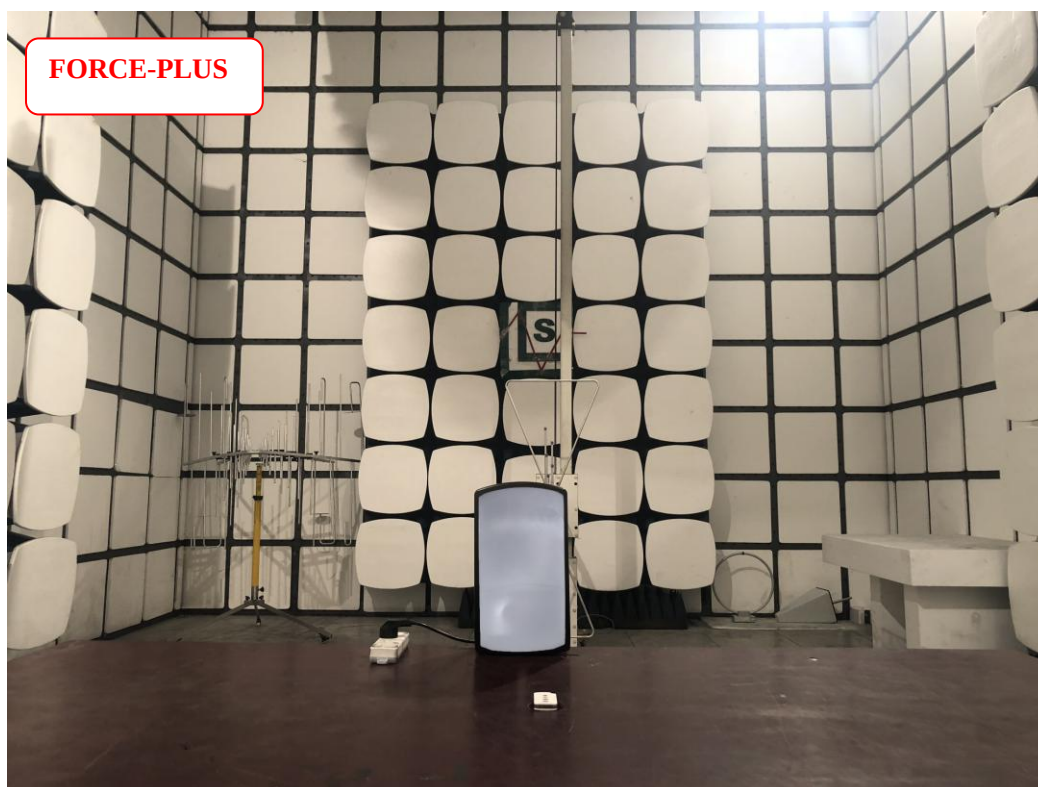

Radiated Emission below 1GHz



Radiated Emission Above 1GHz

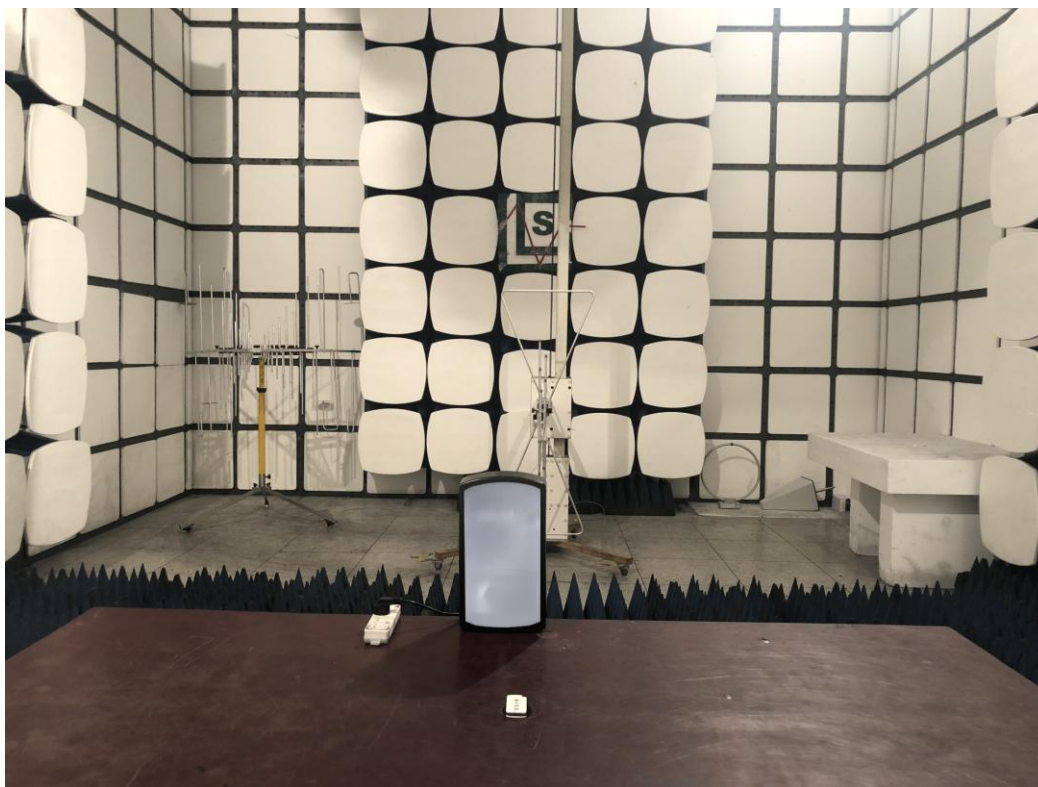

RS



ESD



Conducted Emission



SURGES




CS




HARMONIC&FLICKER




VOLTAGE

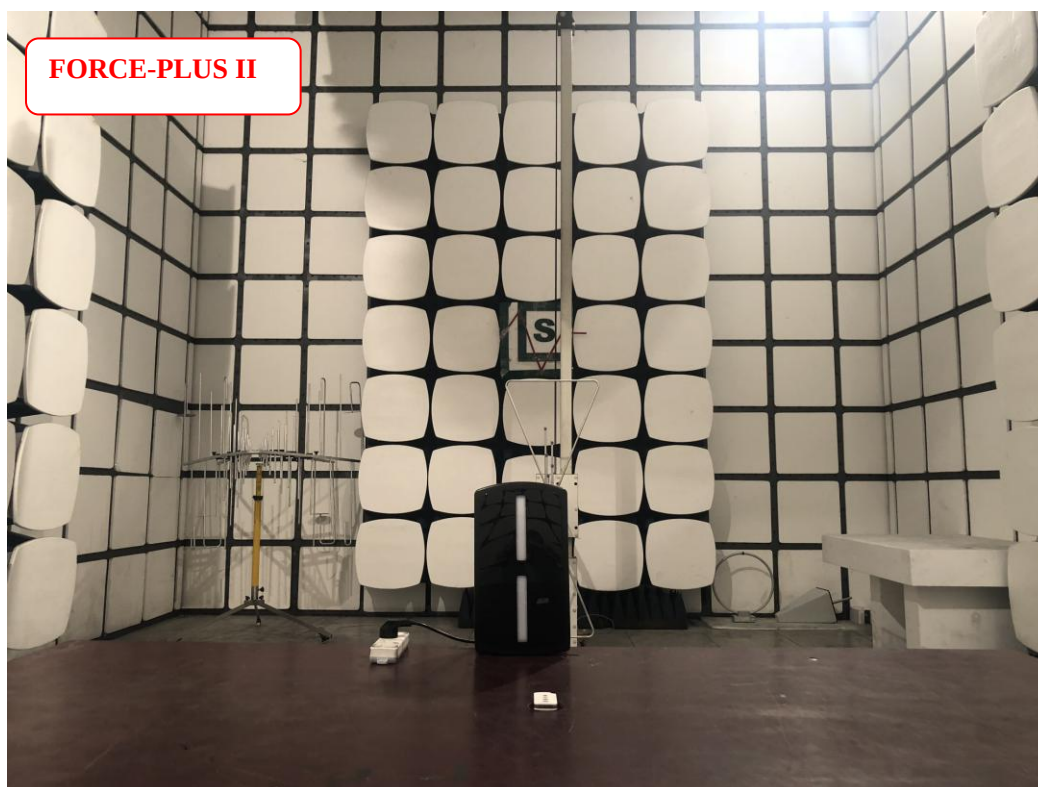

Radiated Emission below 1GHz

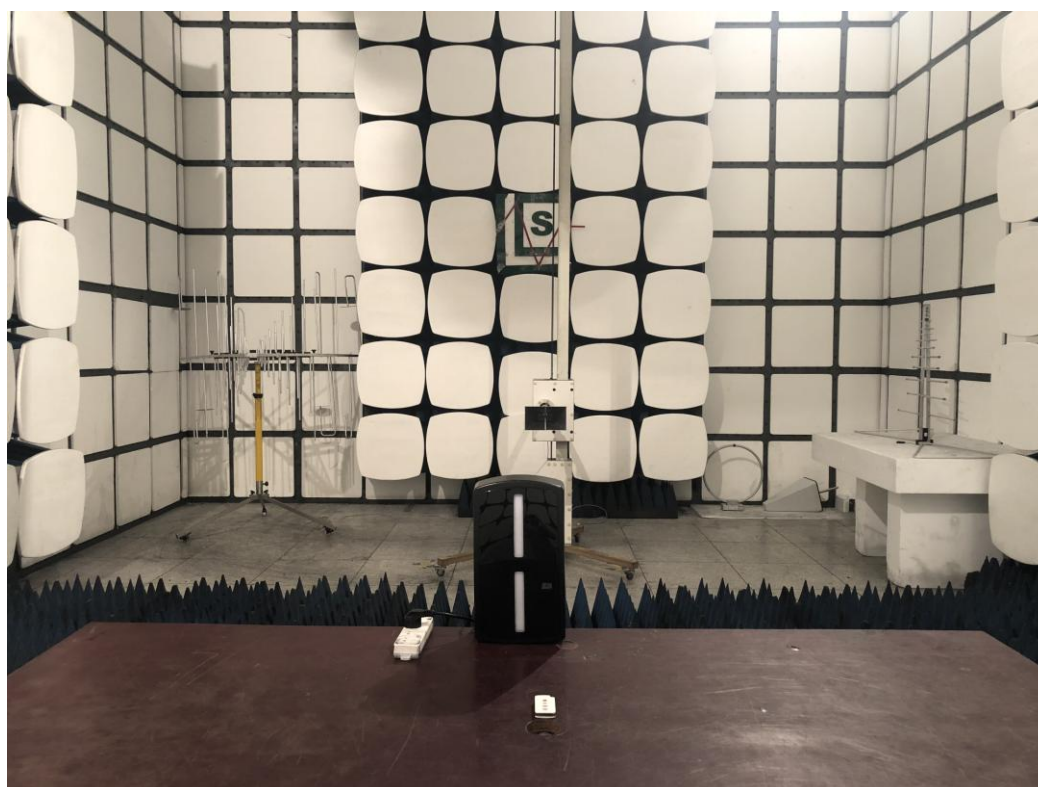

Radiated Emission Above 1GHz

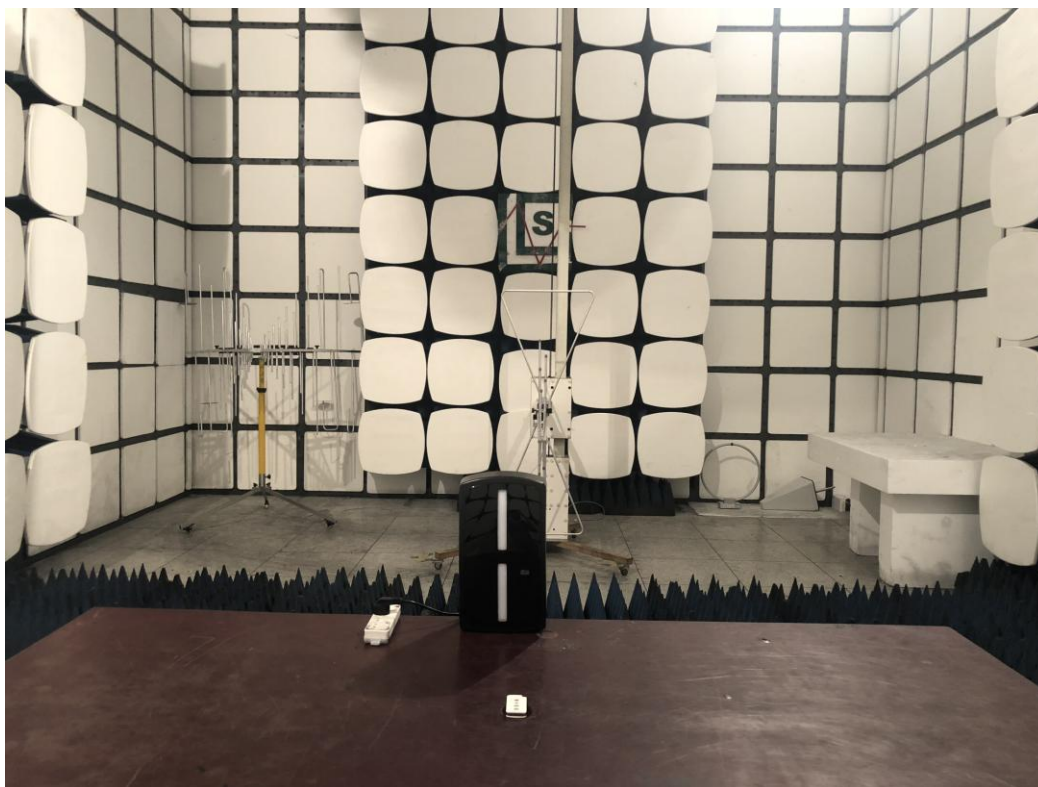

RS



ESD



Conducted Emission



SURGES



CS




HARMONIC&FLICKER




VOLTAGE



Radiated Emission below 1GHz

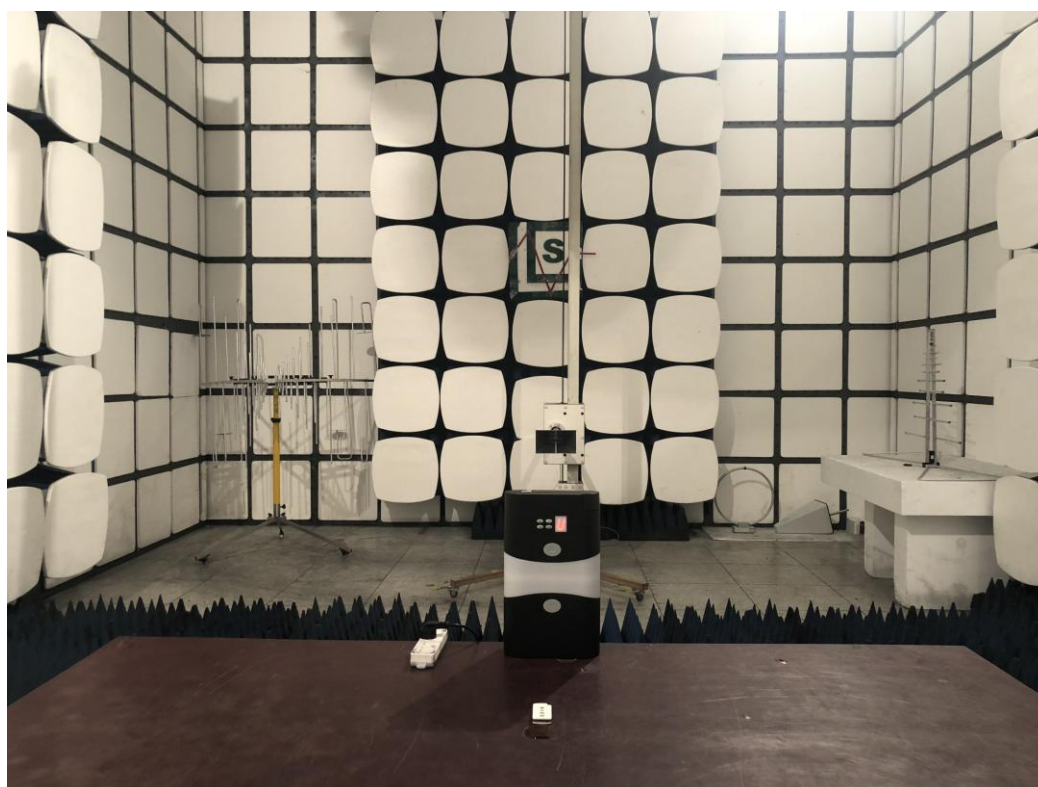


Radiated Emission Above 1GHz

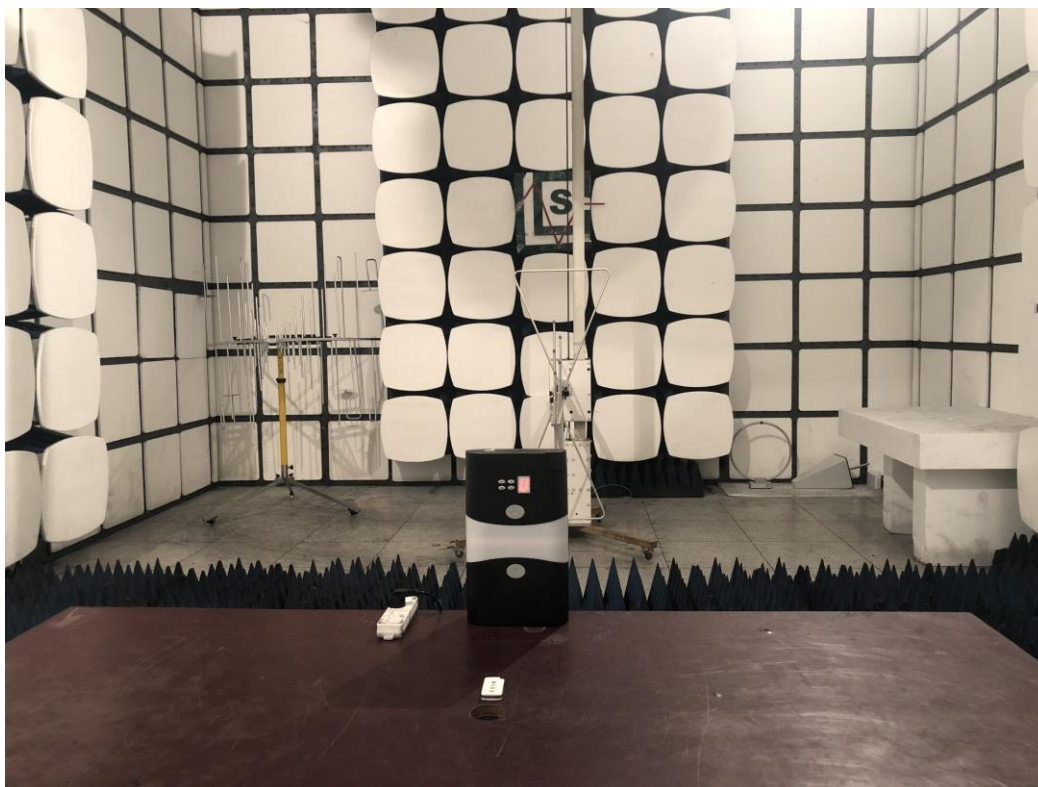

RS



ESD

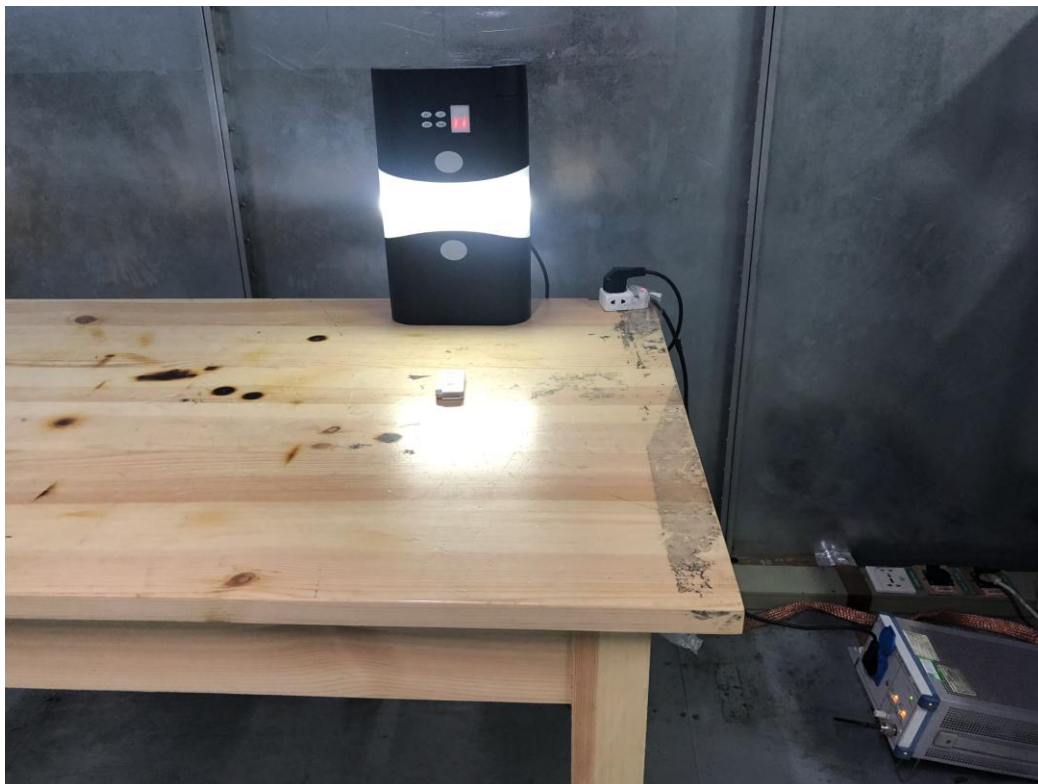

Conducted Emission



SURGES



CS




HARMONIC&FLICKER



VOLTAGE



Radiated Emission below 1GHz

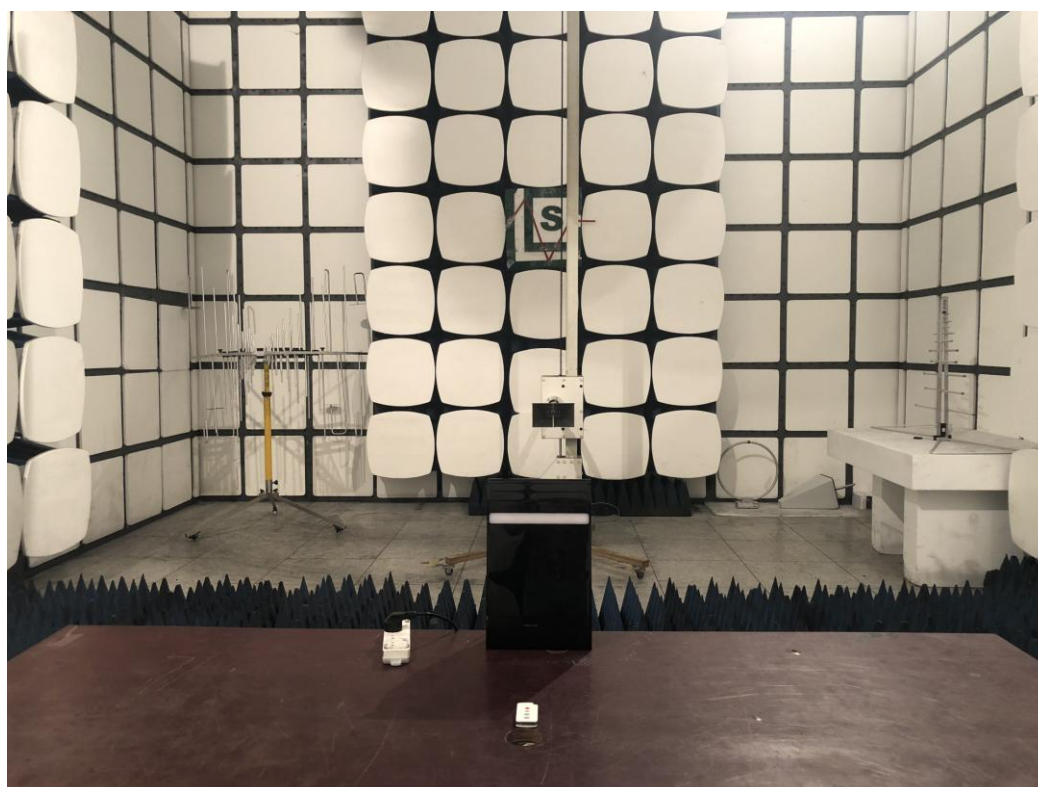

Radiated Emission Above 1GHz



RS



ESD



Conducted Emission



SURGES




CS




HARMONIC&FLICKER




VOLTAGE

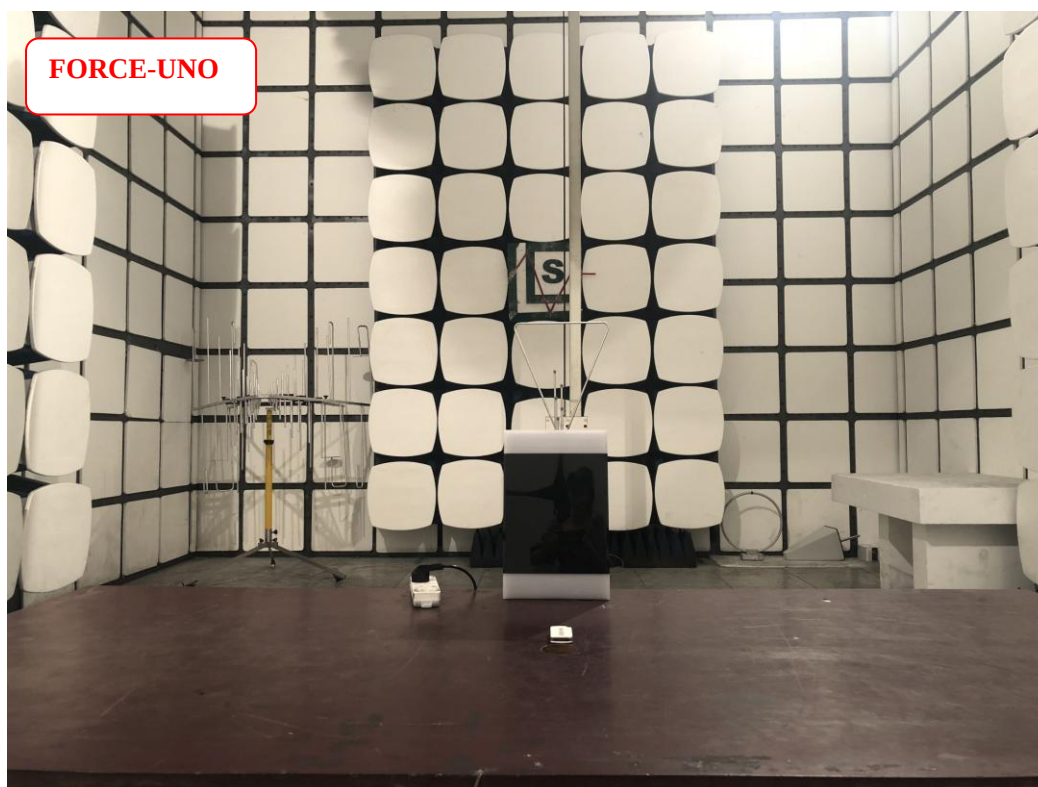

Radiated Emission below 1GHz

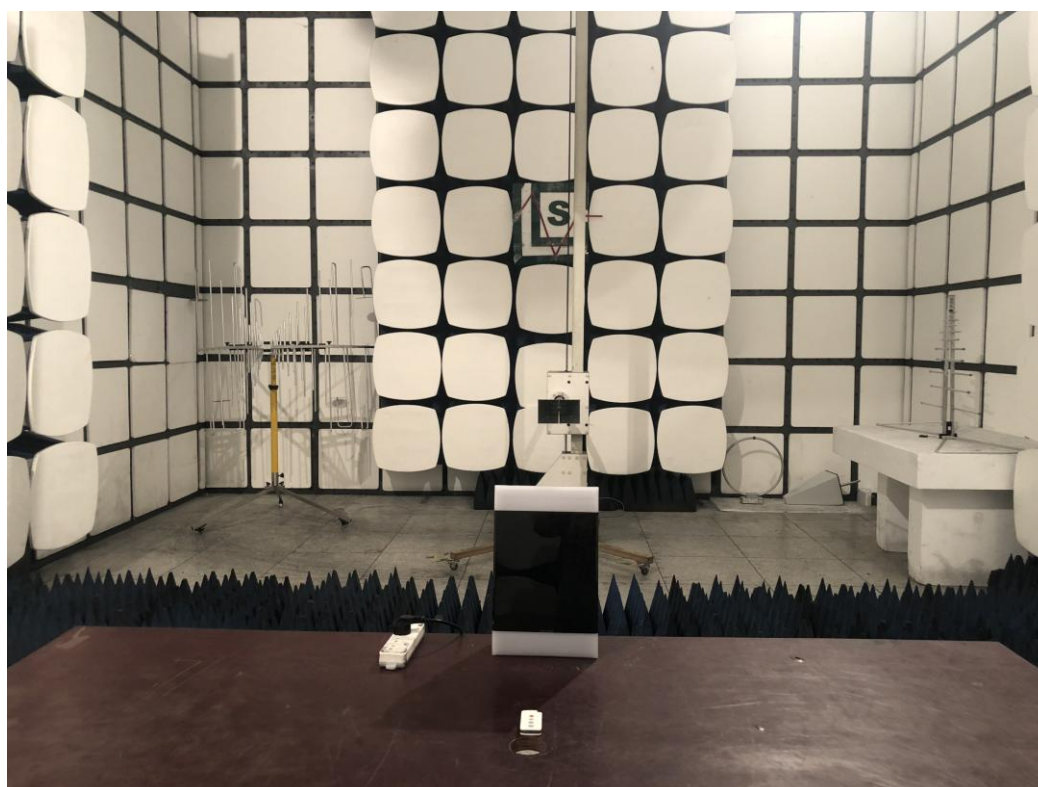

Radiated Emission Above 1GHz

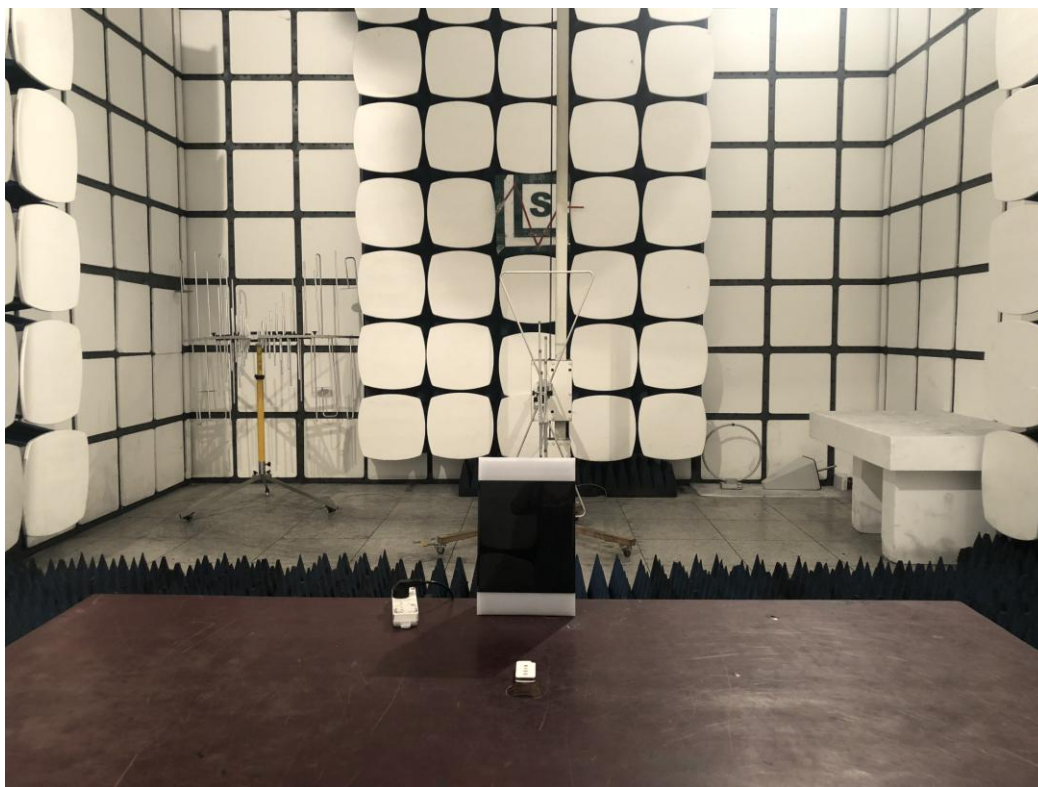

RS



ESD



Conducted Emission



SURGES



CS



HARMONIC&FLICKER



VOLTAGE

16. EUT EXTERIOR AND INTERIOR PHOTOGRAPHS

FORCE-ADVANCED



Fig.1

FORCE-ARC

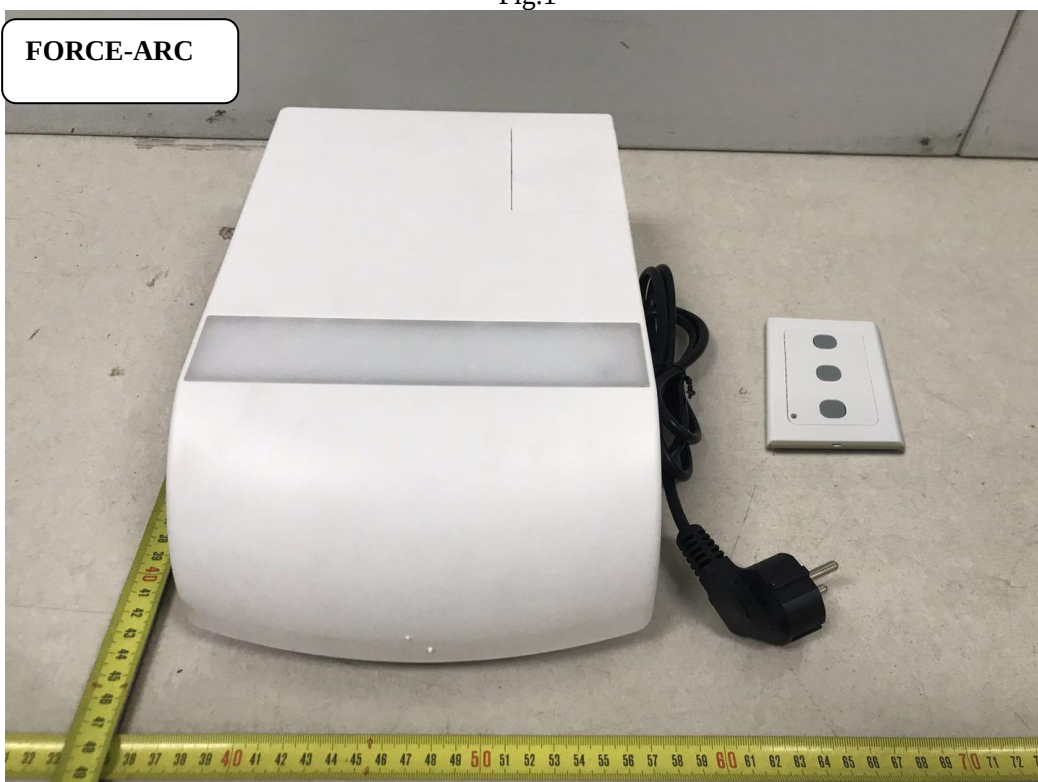


Fig.2

FORCE-ECO

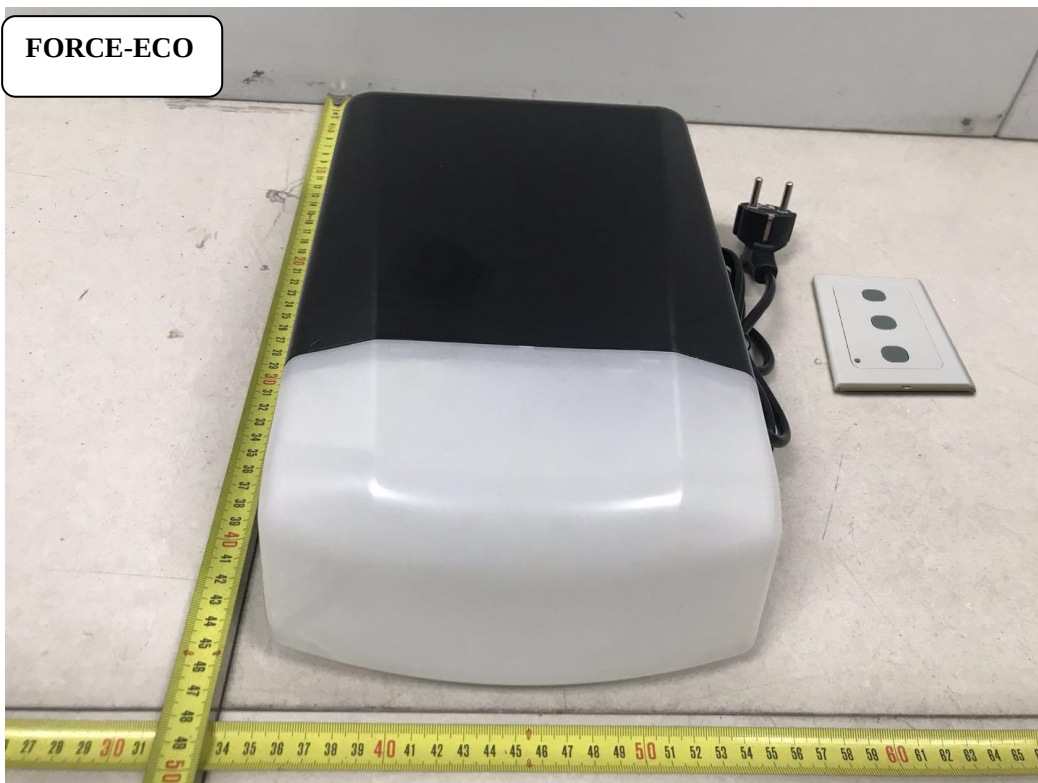


Fig.3

FORCE-MATIC



Fig.4

FORCE-OREO



Fig.5

FORCE-PLUS II



Fig.6



Fig.7

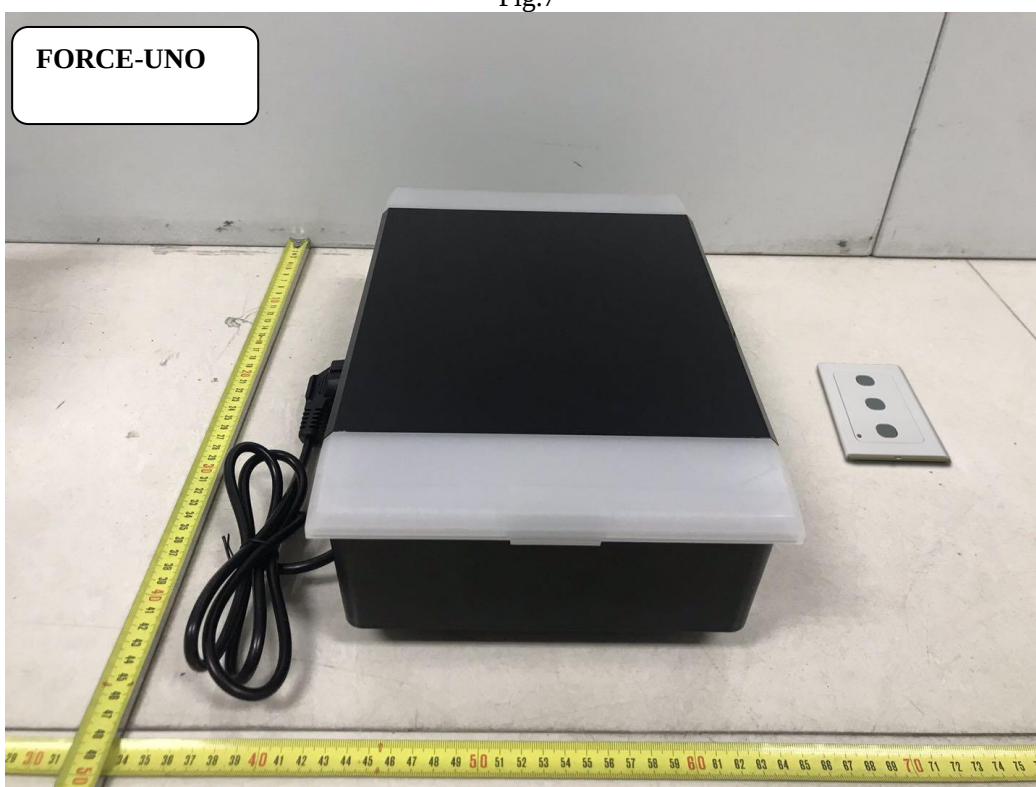


Fig.8

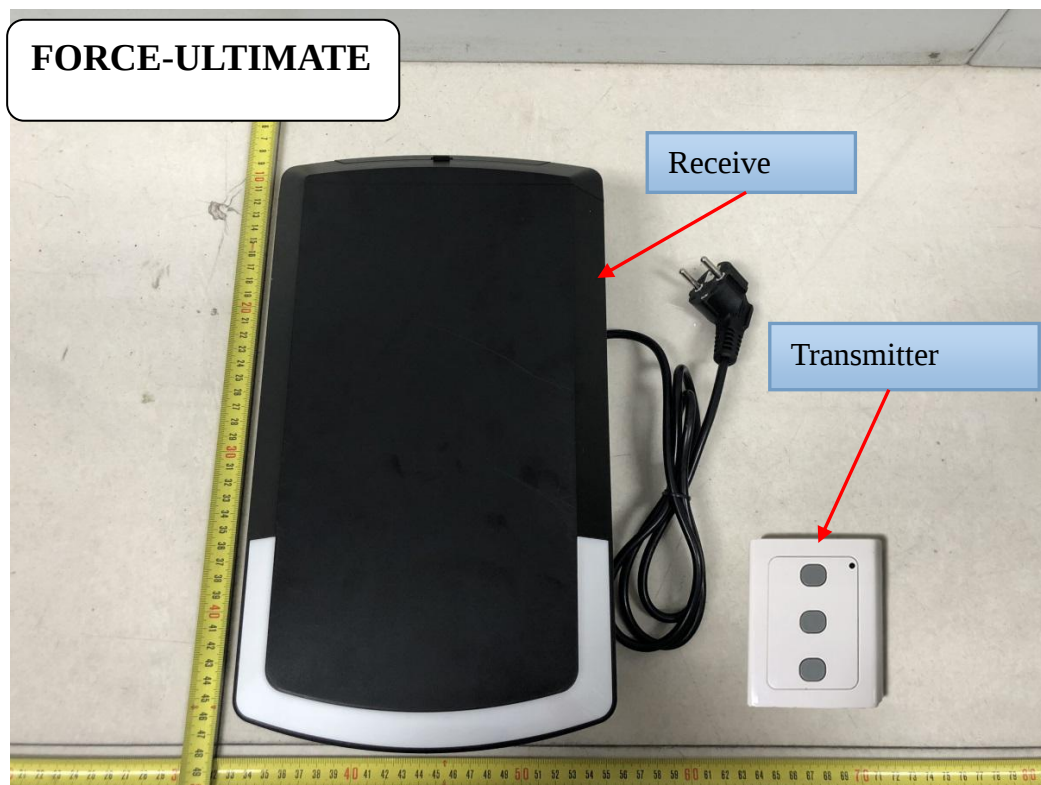


Fig.9



Fig.10



Fig.11



Fig.12



Fig.13



Fig.14

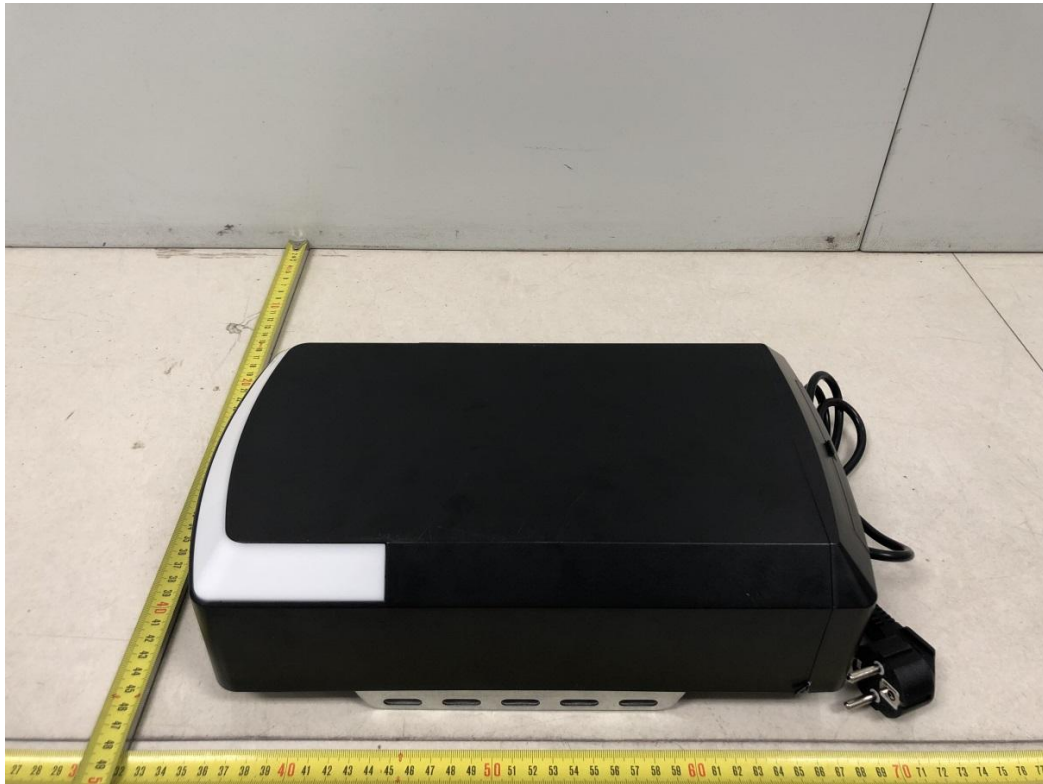


Fig.15


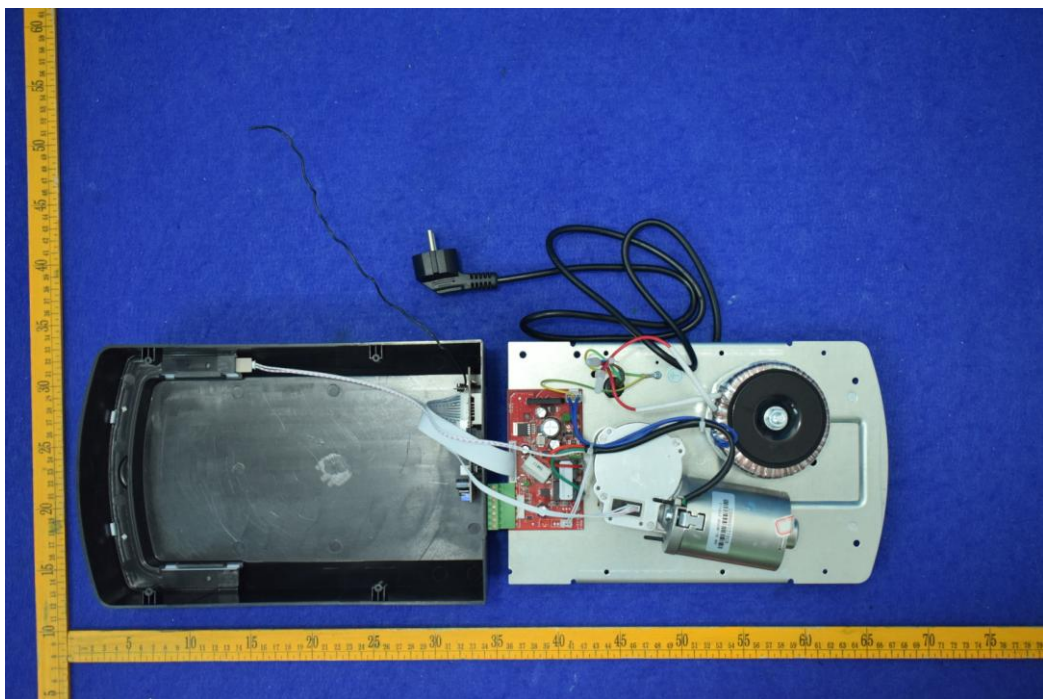


Fig.16

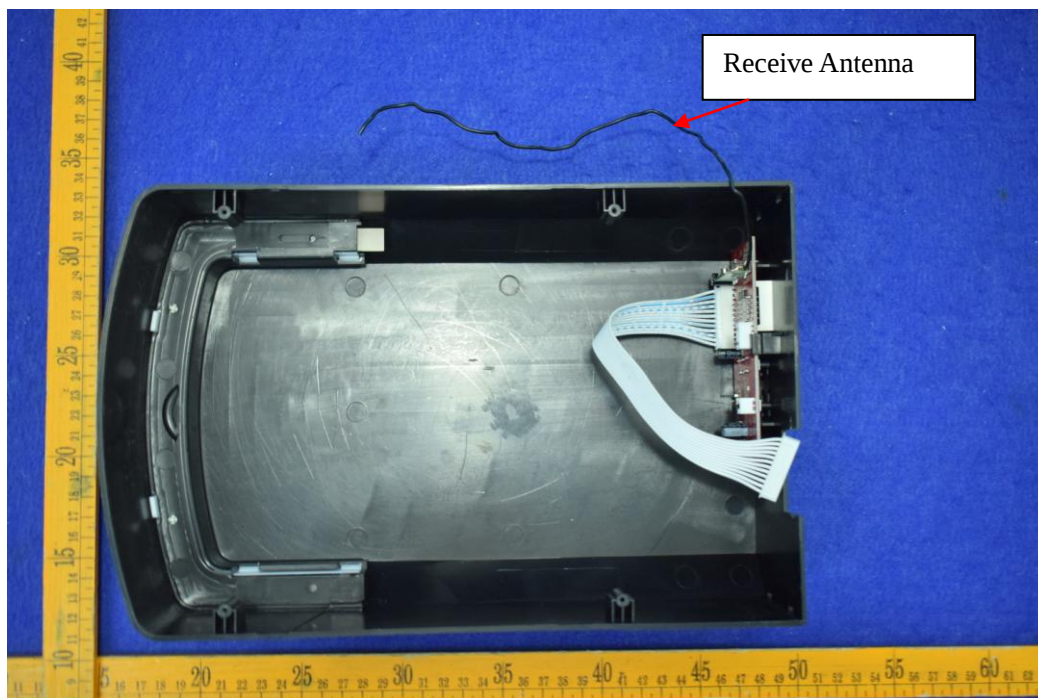

S

Fig.17

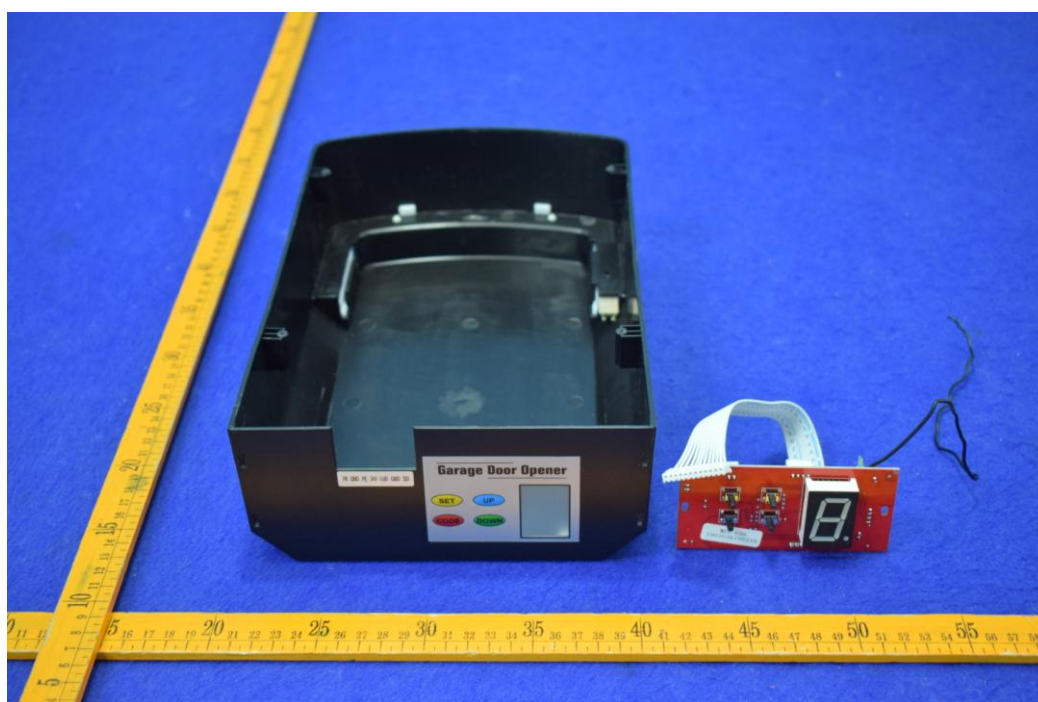


Fig.18

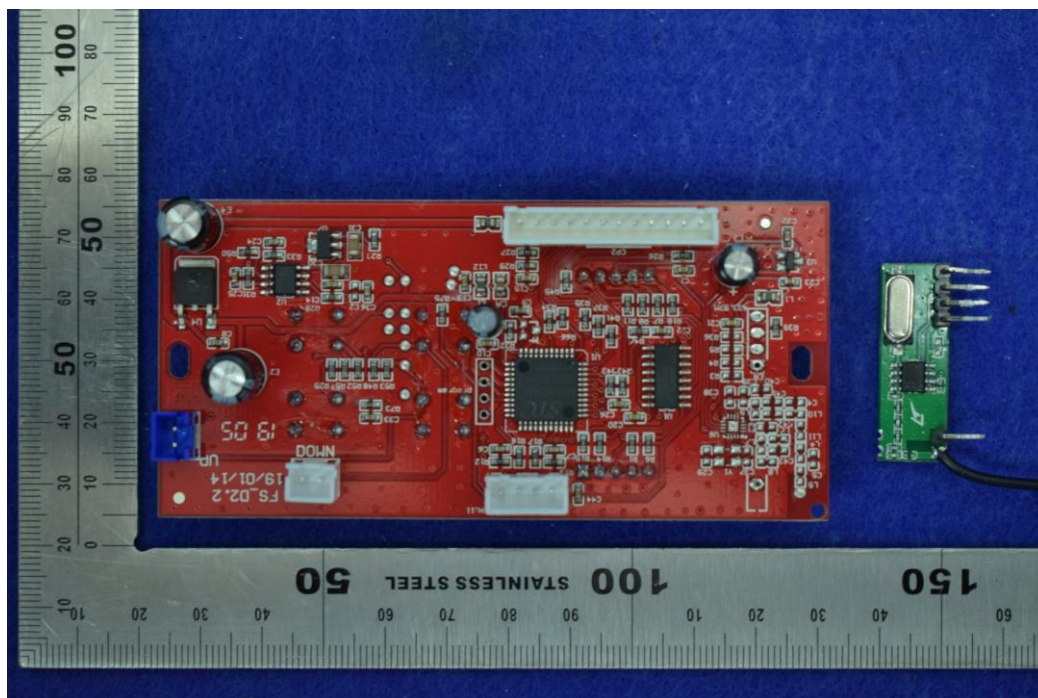


Fig.19

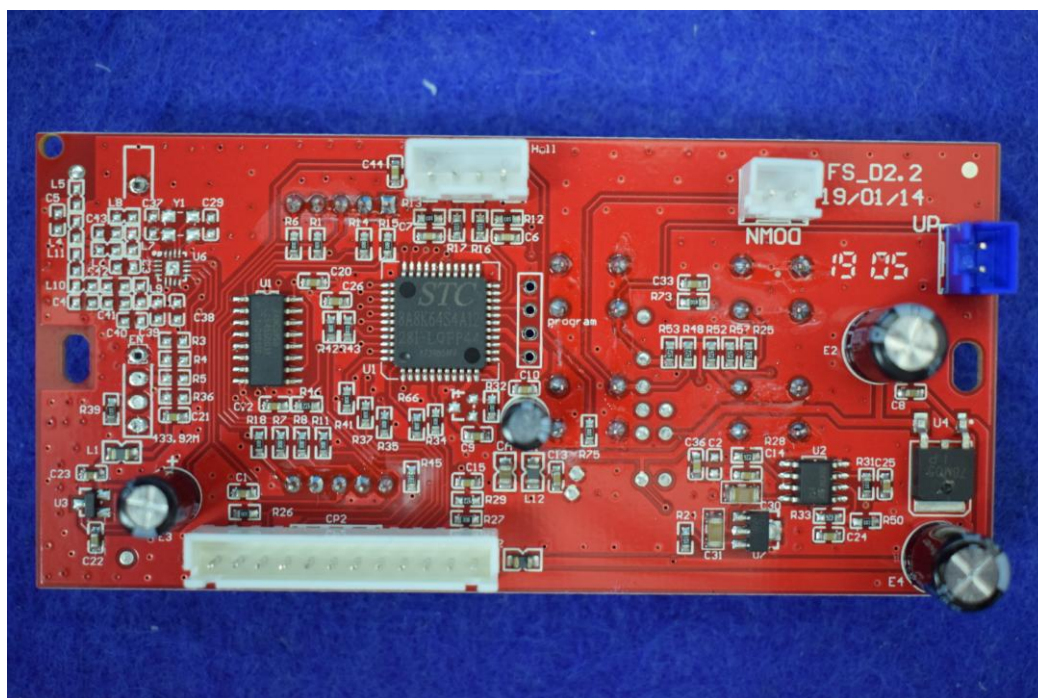


Fig.20

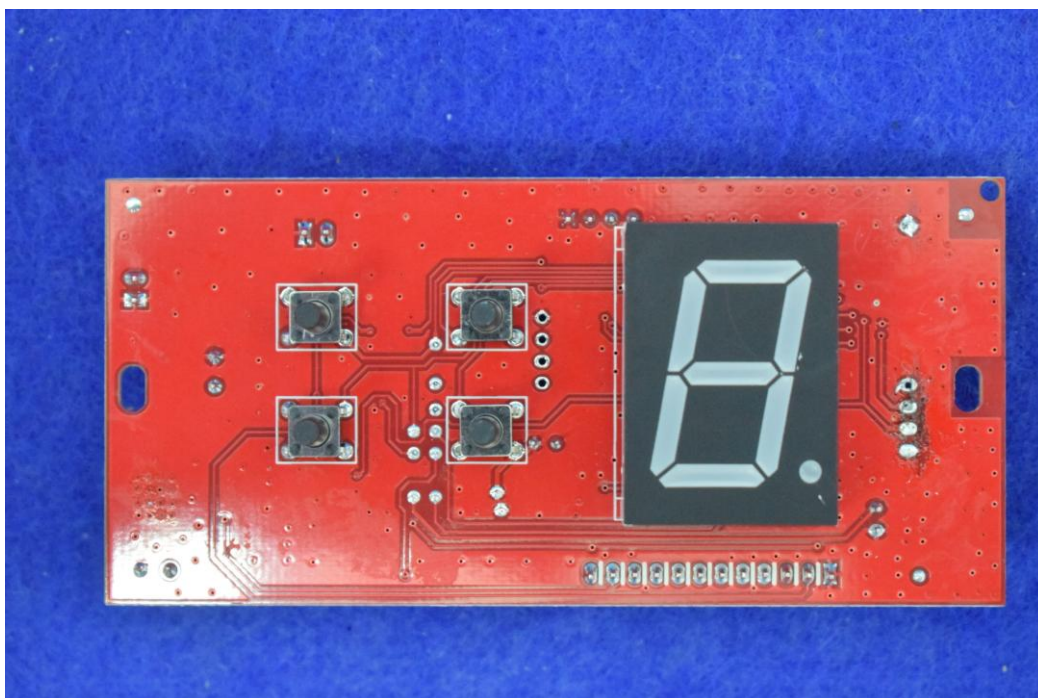


Fig.21

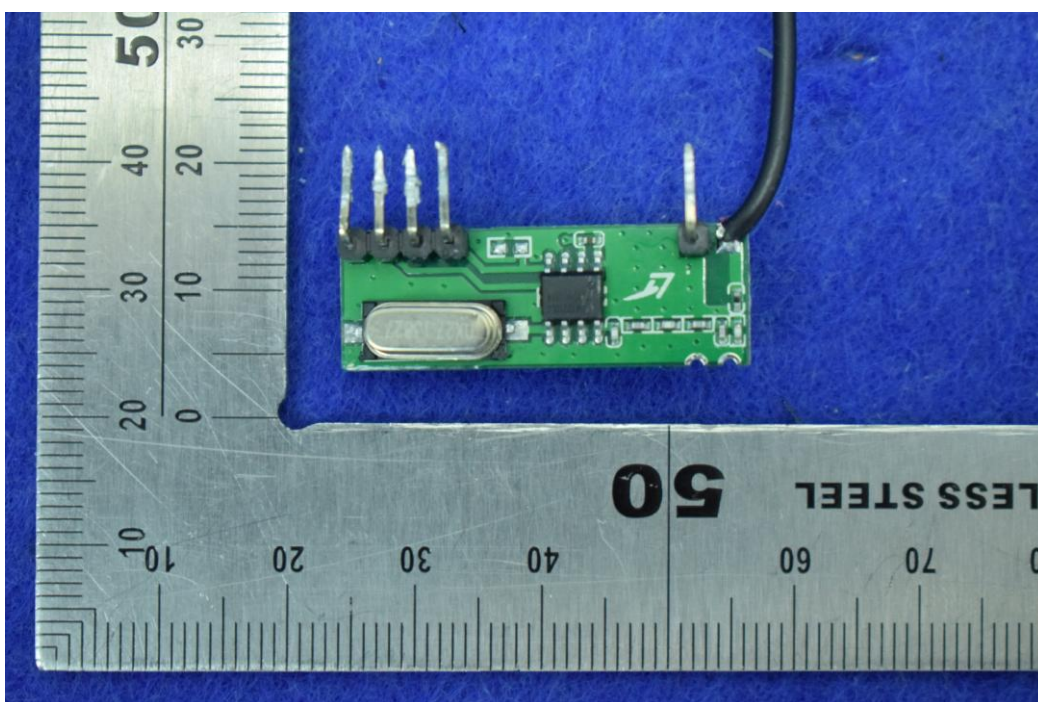


Fig.22

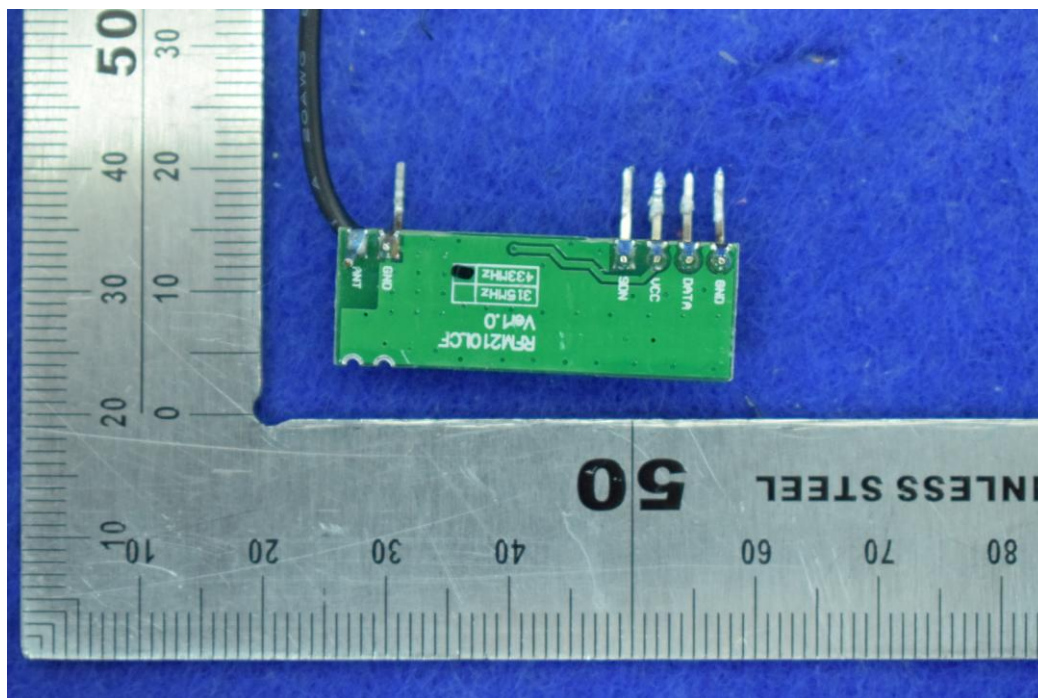


Fig.23

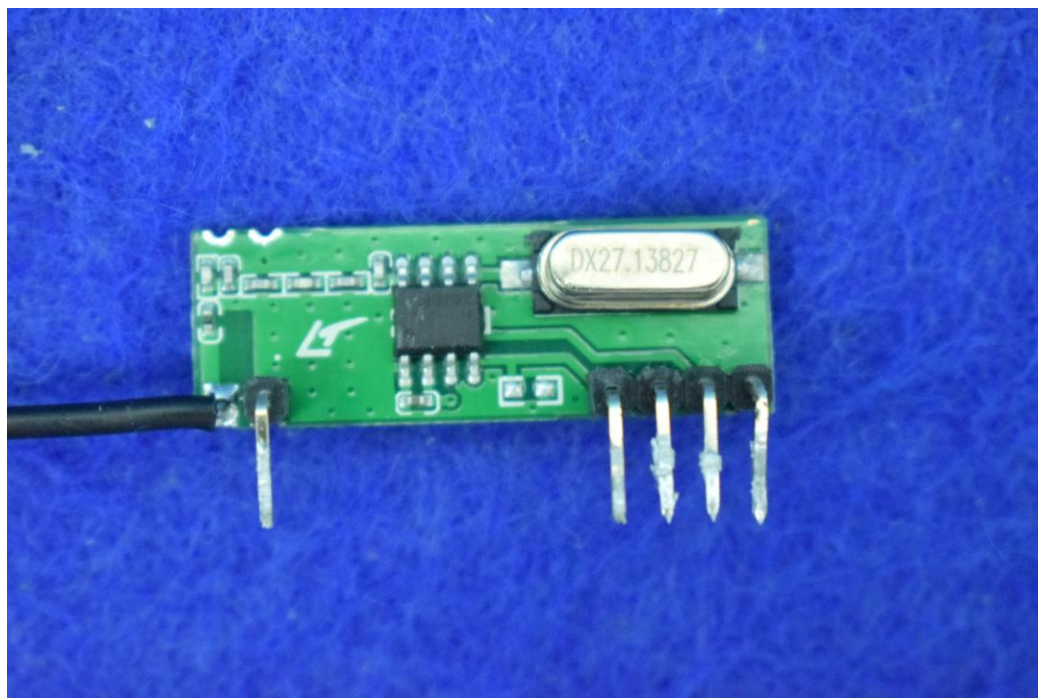


Fig.24

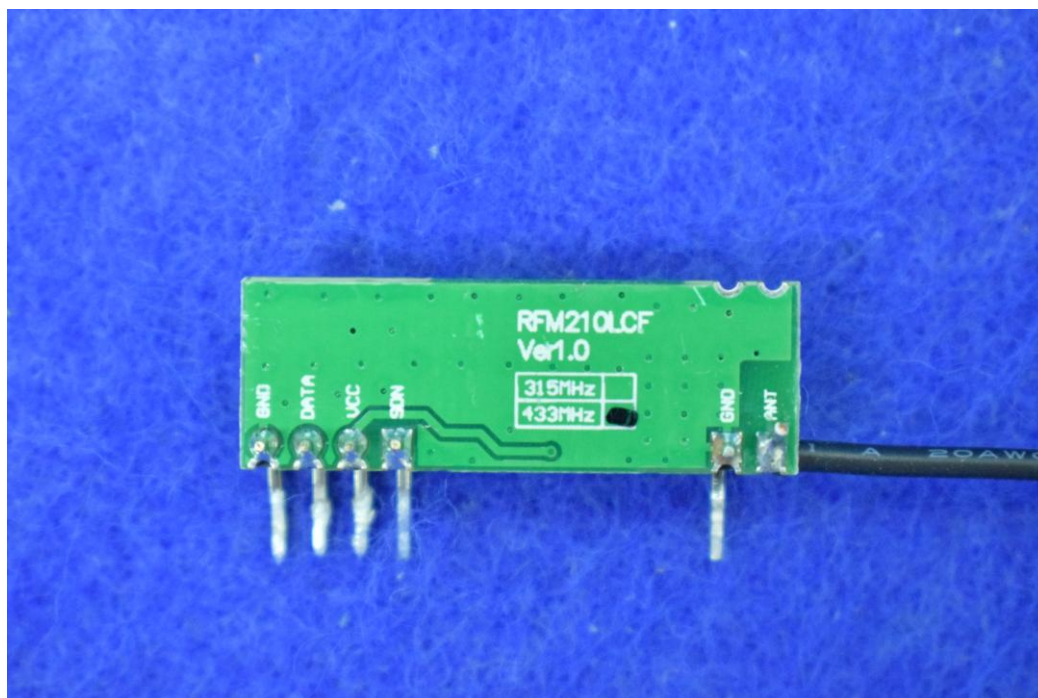


Fig.25

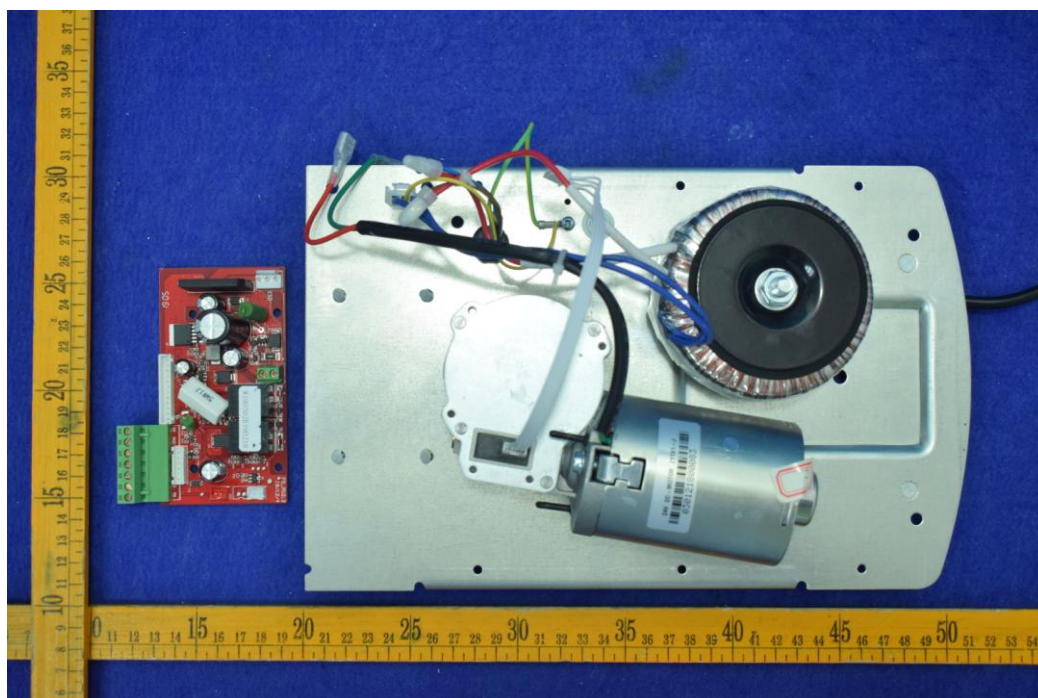


Fig.26

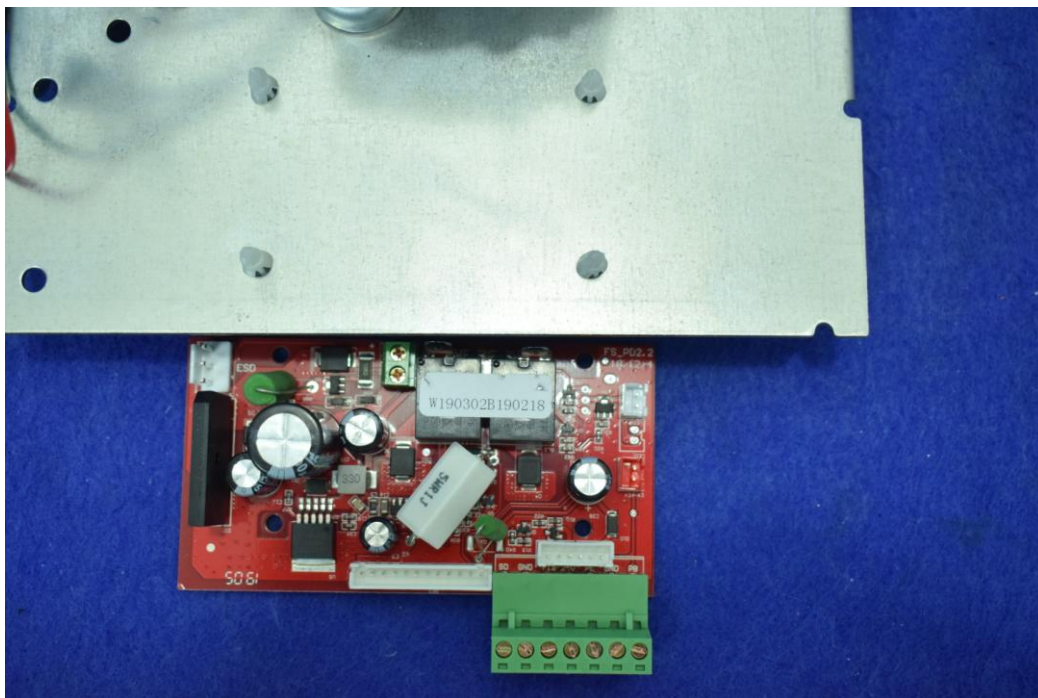


Fig.27

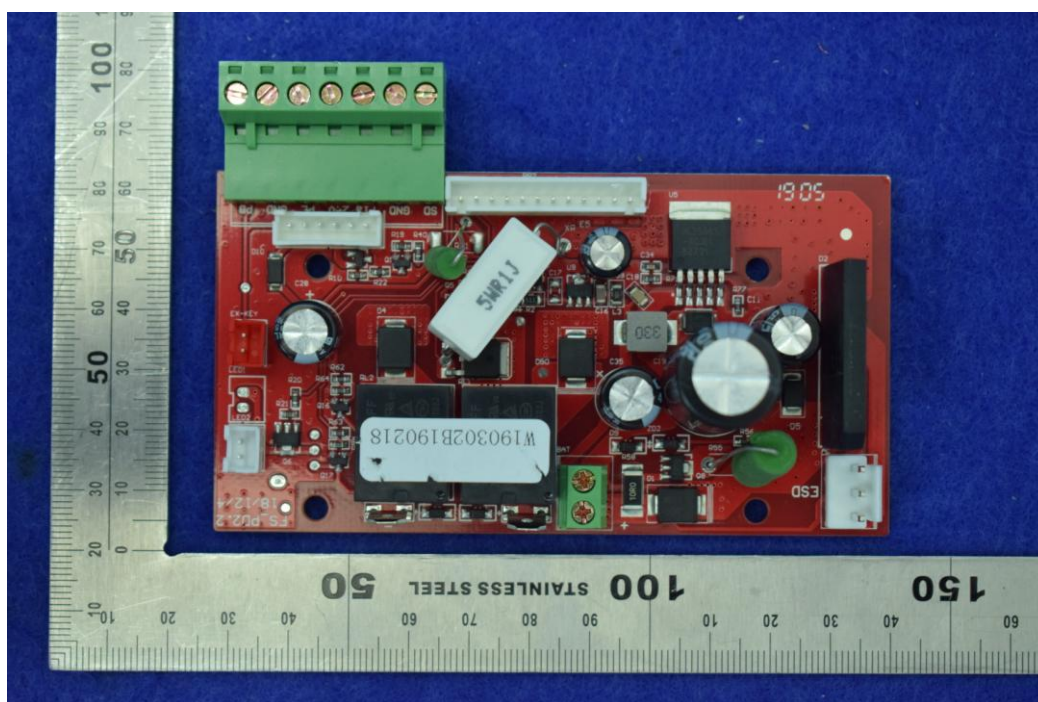


Fig.28

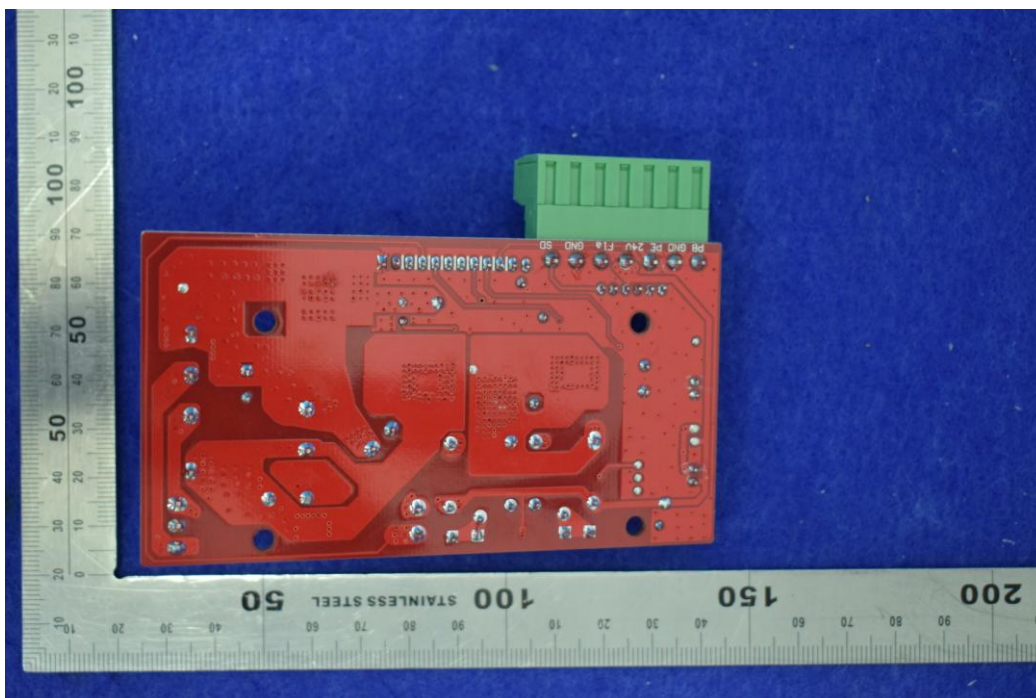


Fig.29

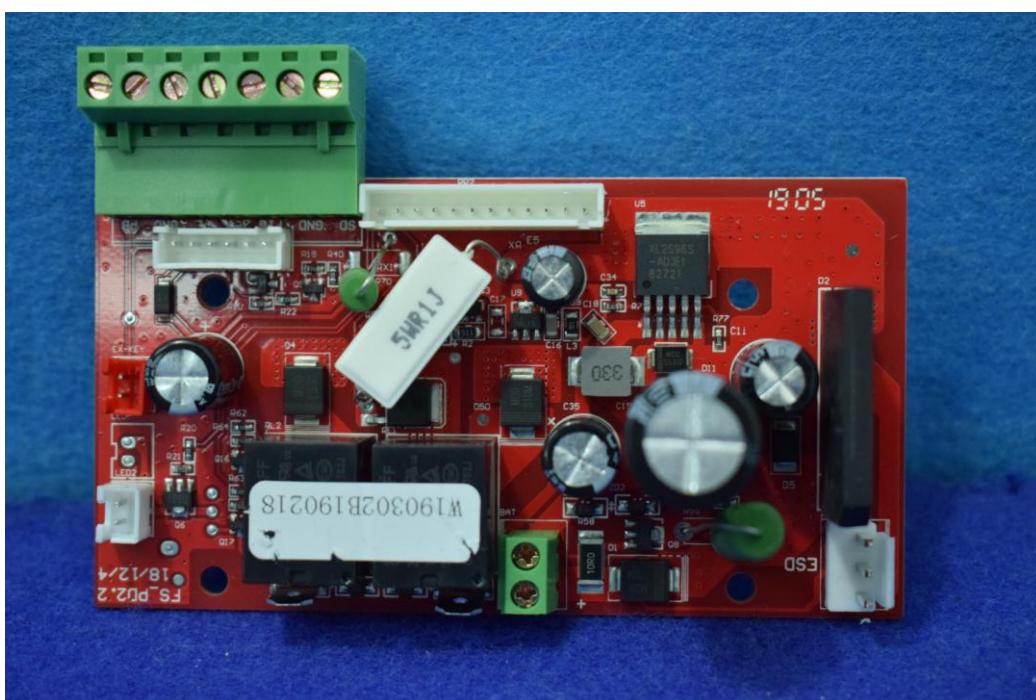


Fig.30

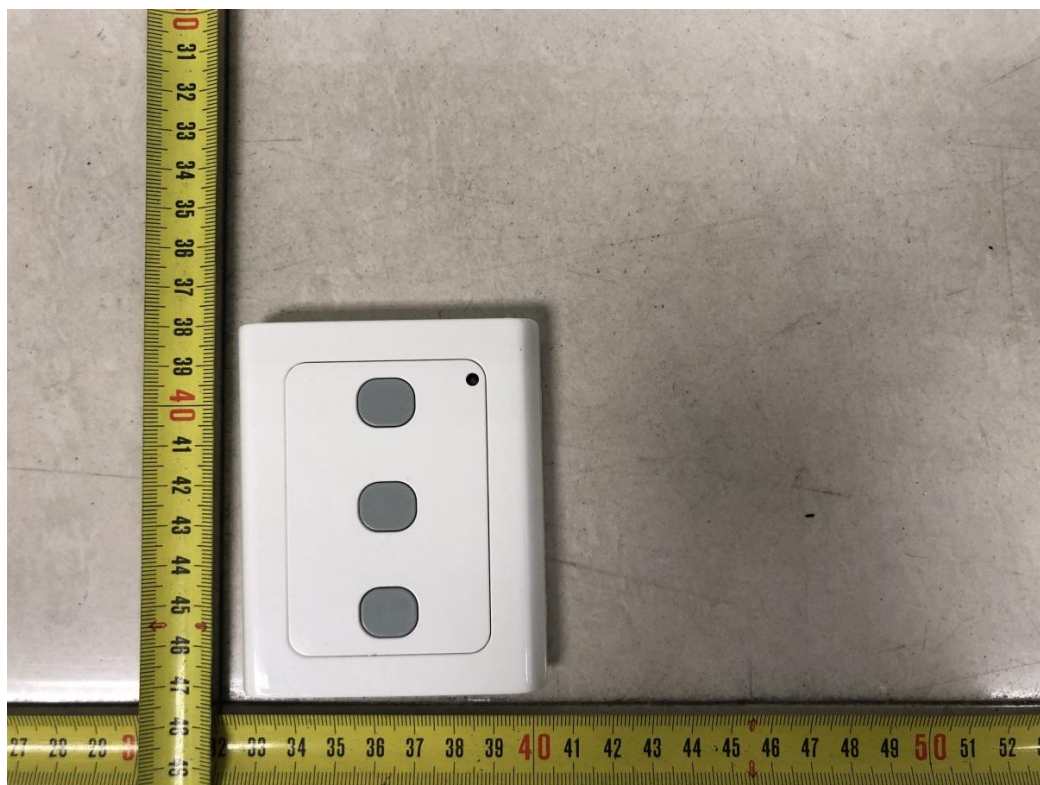


Fig.31



Fig.32

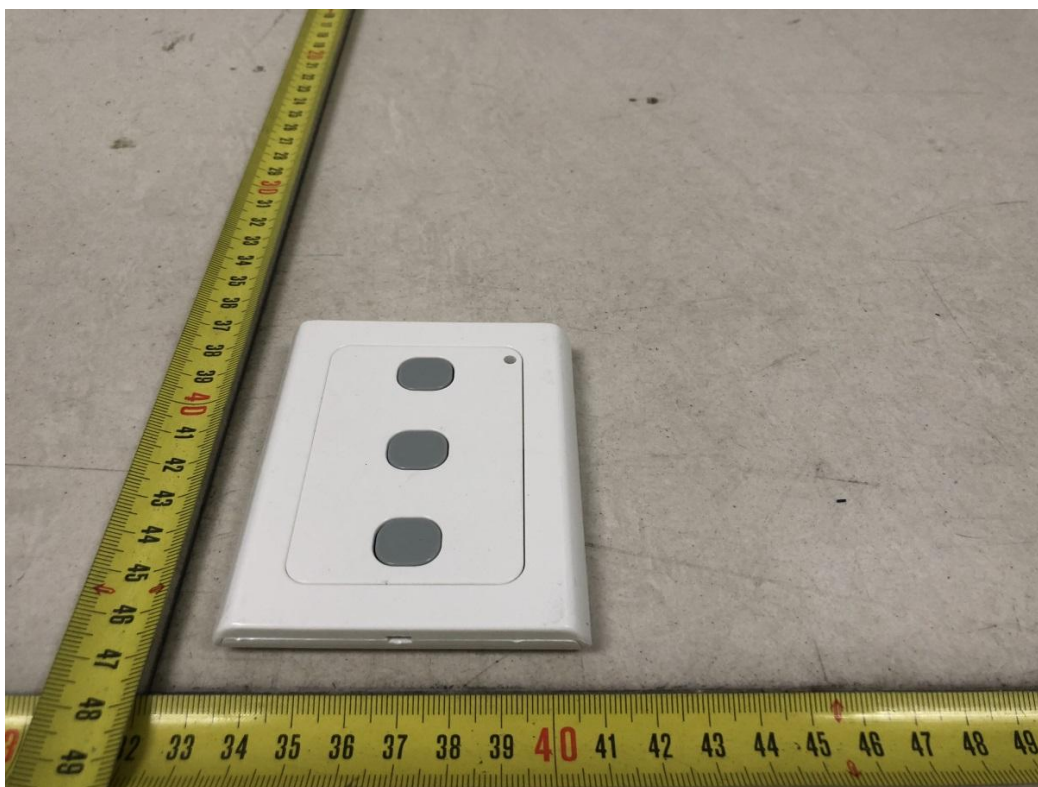


Fig.33

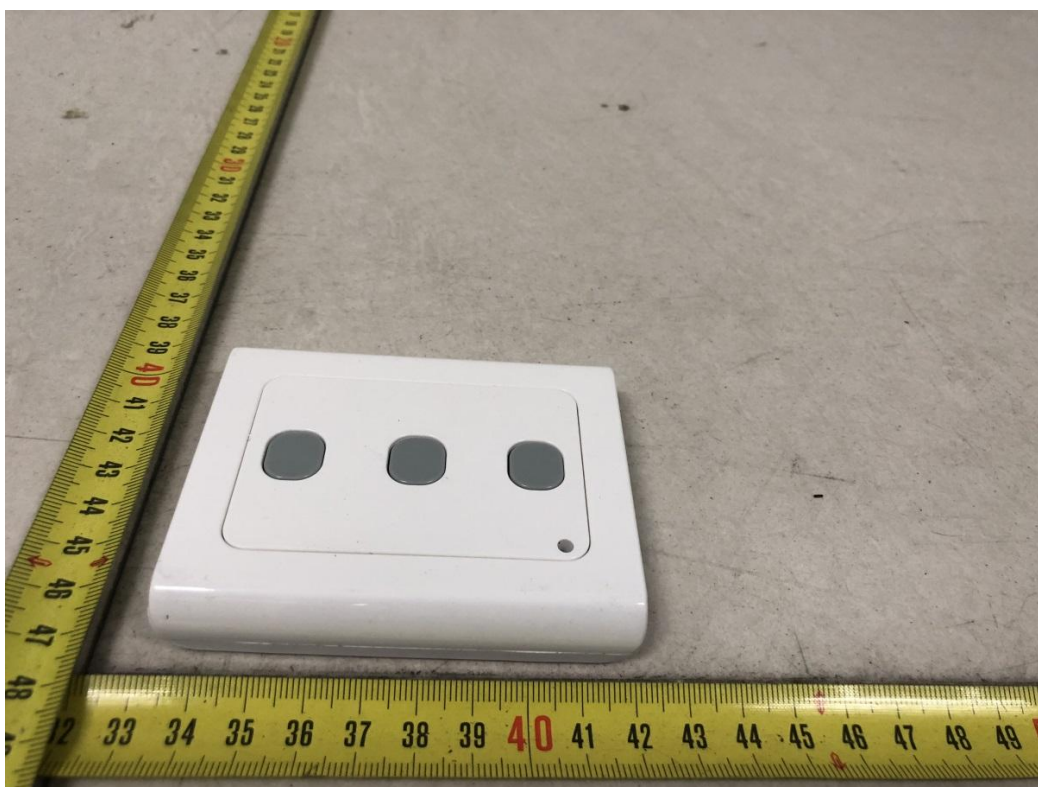


Fig.34

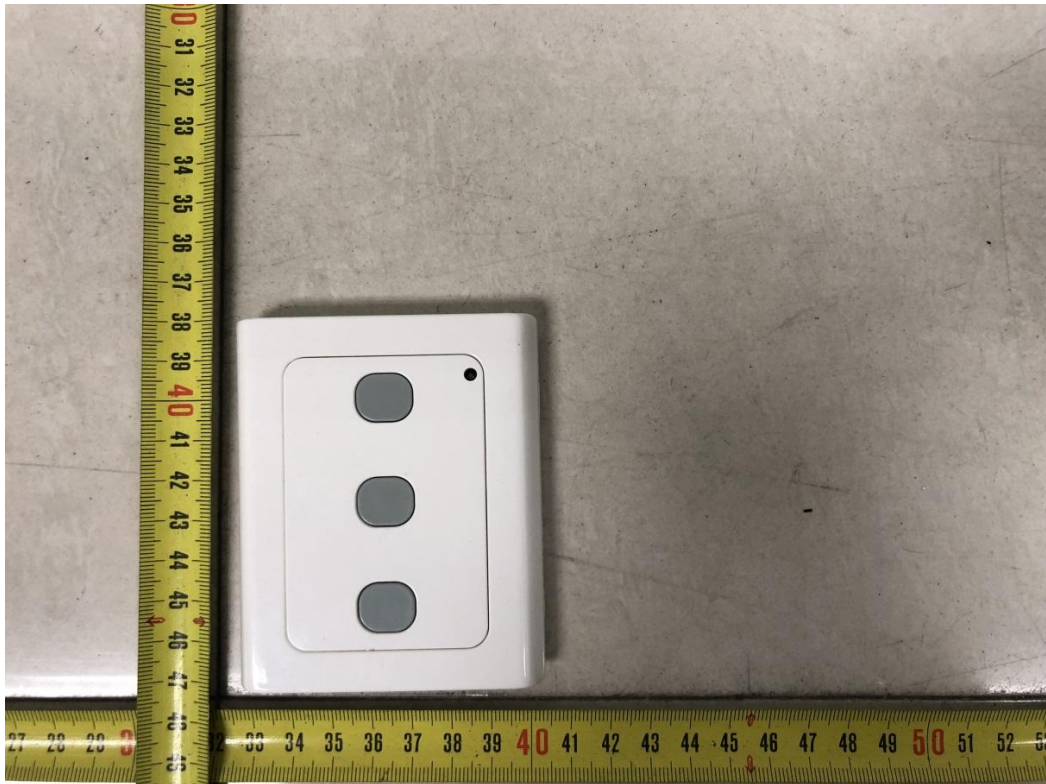


Fig.35



Fig.36



Fig.37



Fig.38

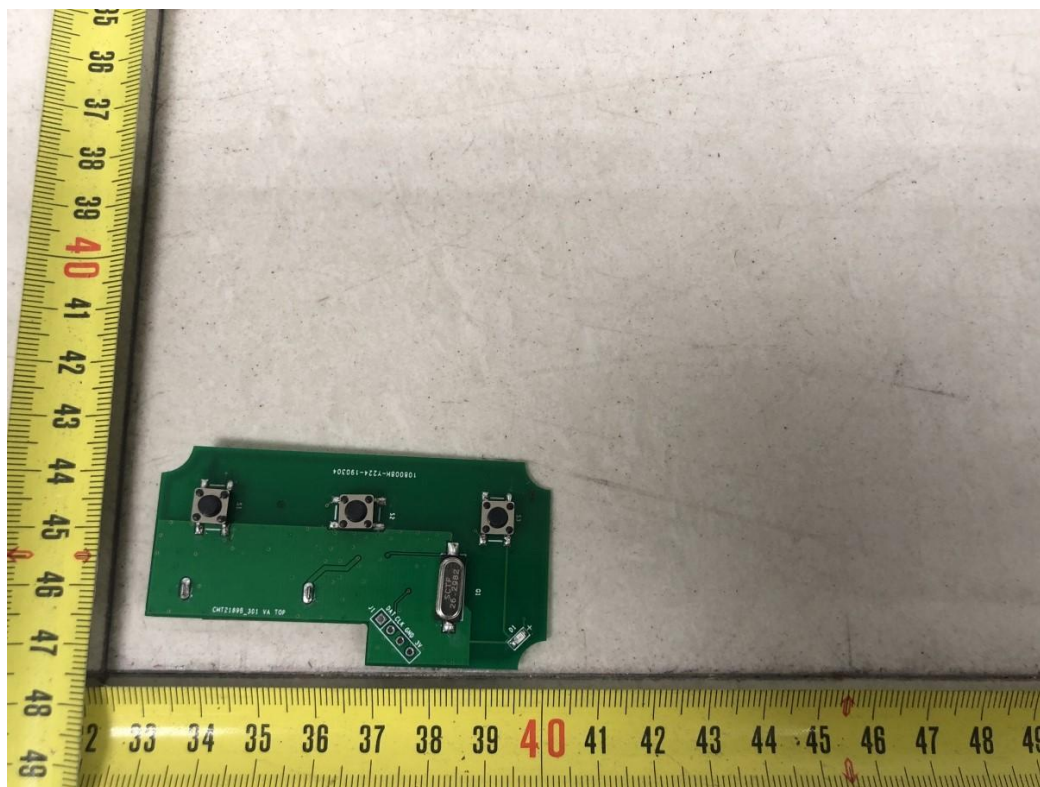


Fig.39

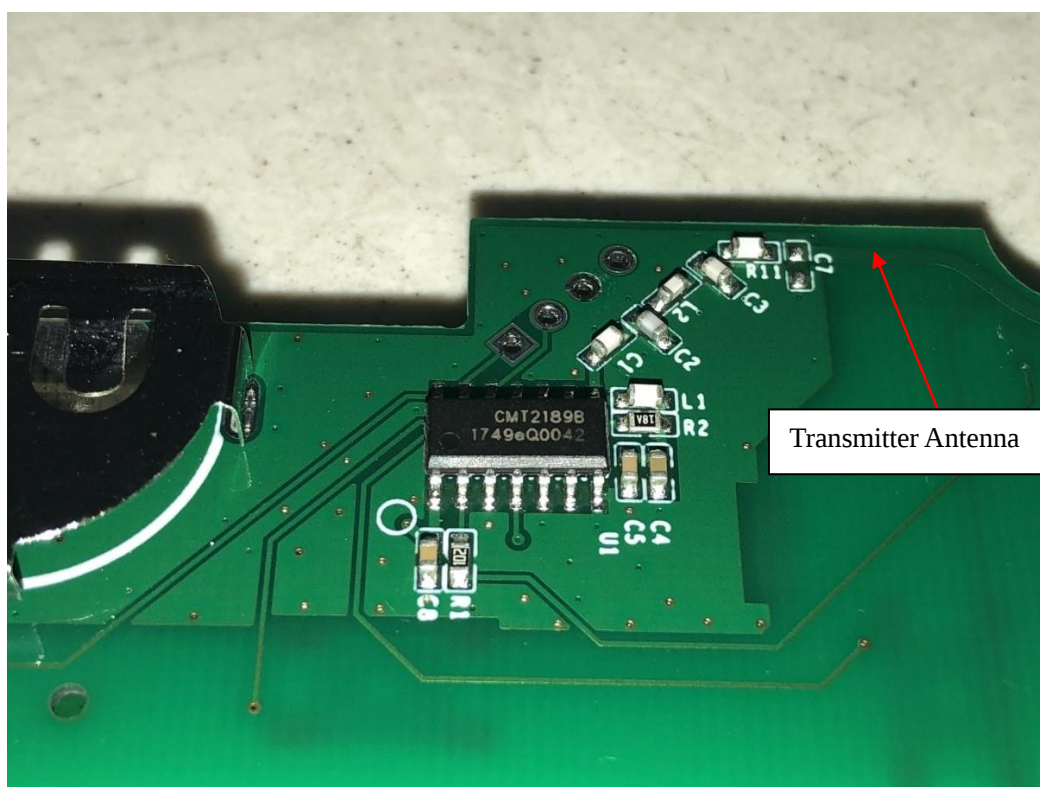


Fig.40

-----THE END OF REPORT-----